



PR1501-PR1507

Fast Recovery Rectifiers


VOLTAGE RANGE: 50 --- 1000 V

CURRENT: 1.5 A

DO - 15

Features

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

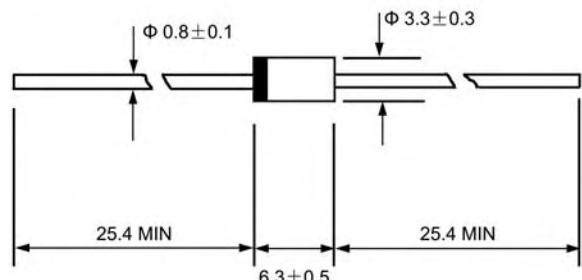

Dimensions in millimeters

Mechanical Data

- ◇ Case: JEDEC DO-15, molded plastic
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.014 ounces, 0.39 grams
- ◇ Mounting position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		PR 1501	PR 1502	PR 1503	PR 1504	PR 1505	PR 1506	PR 1507	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$	$I_{F(AV)}$	1.5						A	
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ C$	I_{FSM}	50.0						A	
Maximum instantaneous forward voltage @ 1.5 A	V_F	1.2						V	
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$	I_R	5.0 100.0						μA	
Maximum reverse recovery time (Note1)	t_{rr}	150		250	500	ns			
Typical junction capacitance (Note2)	C_J	18						pF	
Typical thermal resistance (Note3)	$R_{\theta JA}$	45						$^\circ C/W$	
Operating junction temperature range	T_J	- 55---- +150						$^\circ C$	
Storage temperature range	T_{STG}	- 55---- +150						$^\circ C$	

NOTE:1. Measured with $I_F=0.5A$, $I_R=1A$, $I_{rr}=0.25A$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

Ratings AND Characteristic Curves

FIG.1 – FORWARD CURRENT DERATING CURVE

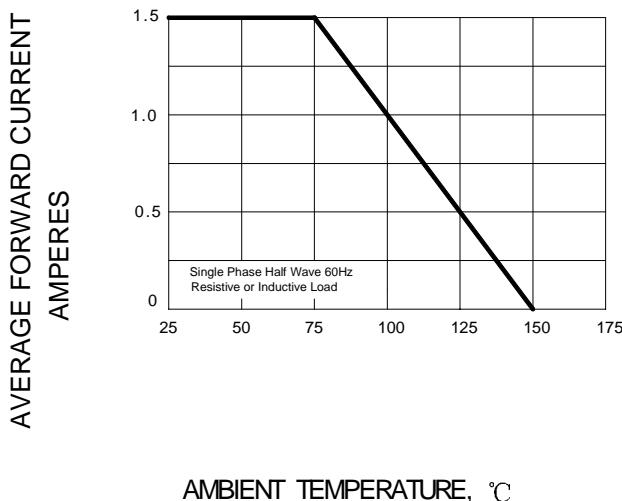


FIG.2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

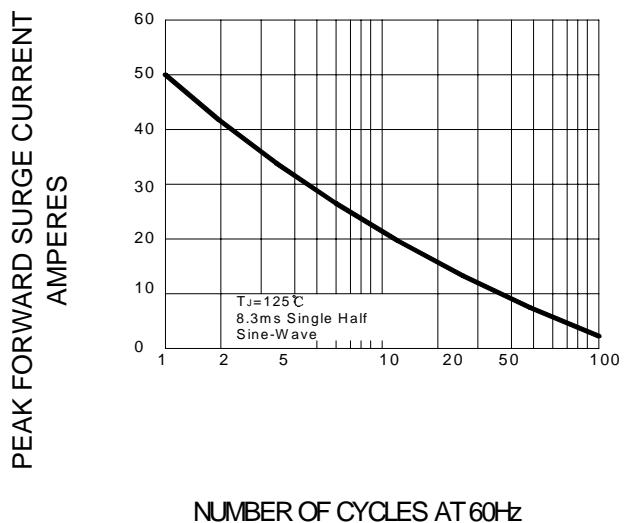


FIG.3 – TYPICAL JUNCTION CAPACITANCE


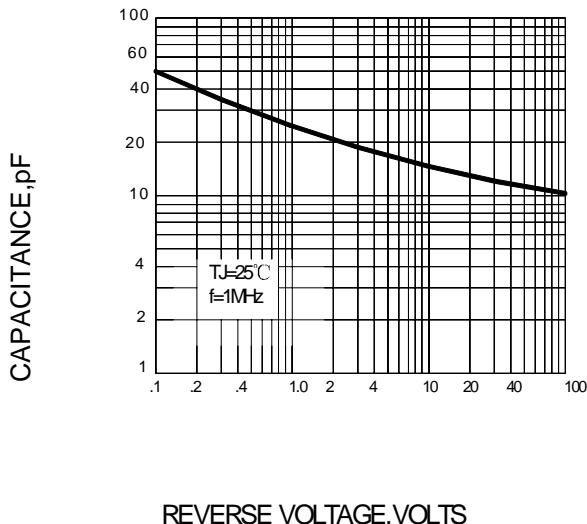


FIG.4 – TYPICAL FORWARD CHARACTERISTICS

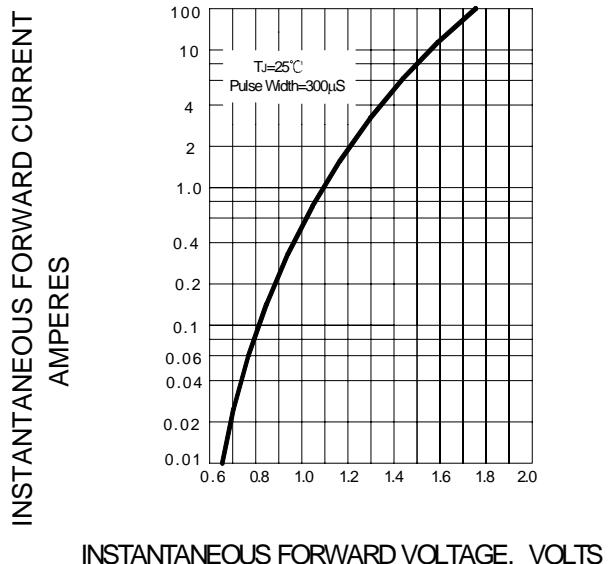

REVERSE VOLTAGE, VOLTS

INSTANTANEOUS FORWARD VOLTAGE, VOLTS