



中国·人民电器集团
PEOPLE ELE. APPLIANCE GROUP CHINA


GENERAL RELAY

GENERAL RELAY




PRH2B-U

Size(mm): 20.5×27×33.4
Terminal layout: 2Z
Contact capacity: 10A 220VAC
10A 28VDC
Contact resistance: $\leq 50\text{m}\Omega$
Insulation resistance: $\geq 500\text{M}\Omega$
Dielectric strength: BOC 1000VAC
BCC 1500VAC

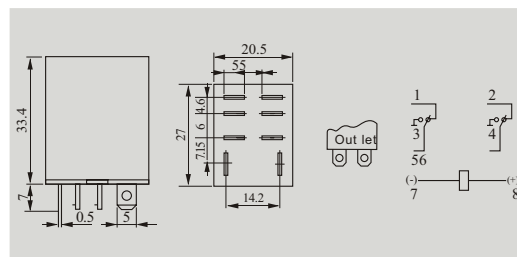


PRH4B-U

Size(mm): 41×27.4×34.9
Terminal layout: 4Z
Contact capacity: 10A 220VAC
10A 28VDC
Contact resistance: $\leq 50\text{m}\Omega$
Insulation resistance: $\geq 500\text{M}\Omega$
Dielectric strength: BOC 1000VAC
BCC 1500VAC

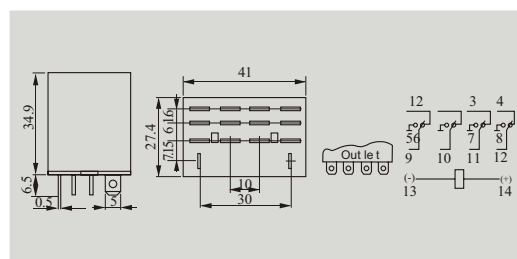


JRC-19F(4078)

Size(mm): 21×10×12
Terminal layout: 2Z, 2H
Contact capacity: 0.5A 120VAC
1A 28VDC
Contact resistance: $\leq 50\text{m}\Omega$
Insulation resistance: $\geq 100\text{M}\Omega$
Dielectric strength: BOC 500VAC
BCC 1000VAC

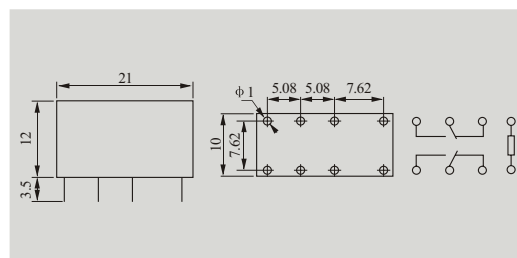

JQC-3F(T73)

Size(mm): 19.2×15.5×15.4
Terminal layout: 1Z, 1H
Contact capacity: 10A 125VAC
10A 28VDC
Contact resistance: $\leq 50\text{m}\Omega$
Insulation resistance: $\geq 500\text{M}\Omega$
Dielectric strength: BOC 750VAC
BCC 1200VAC

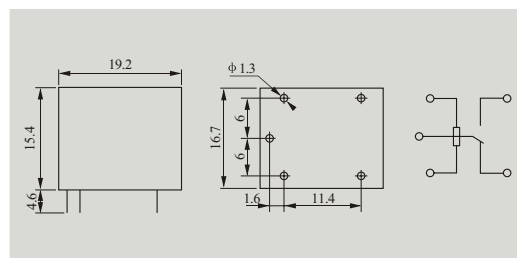

Model	Coil nominal voltage	Coil nominal power	Electrical life	Mechanical life	Operating temperature	Weight	Mounting methods
PRH2B-U	DC 6 to 110V AC 6 to 220V	DC $\leq 0.9\text{W}$ AC $\leq 1.2\text{VA}$	10^5 OPS	10^7 OPS	-40℃~55℃	$\leq 34\text{g}$	Flange, Outlet
PRH4B-U	DC 6 to 220V AC 6 to 380V	DC $\leq 1.5\text{W}$ AC $\leq 2.5\text{VA}$	10^5 OPS	10^7 OPS	-40℃~55℃	$\leq 69\text{g}$	Flange, Outlet
JRC-19F(4078)	DC 3 to 48V	DC $\leq 0.36\text{W}$	10^5 OPS	10^7 OPS	-40℃~55℃	$\leq 5\text{g}$	Printed-circuit board
JQC-3F(T73)	DC 3 to 48V	DC $\leq 0.36\text{W}$	10^5 OPS	10^7 OPS	-40℃~85℃	$\leq 10\text{g}$	Printed-circuit board