


800 mA Low-Dropout Linear Regulator

PS1117-XX

FEATURES

- Available in 1.5V, 1.8V, 2.5V, 2.85V, 3.3V 5V, and adjustable versions
- Current limiting and thermal protection
- Output current (800mA)
- Line regulation (0.2%Max)
- Load regulation (0.4%Max)

HF

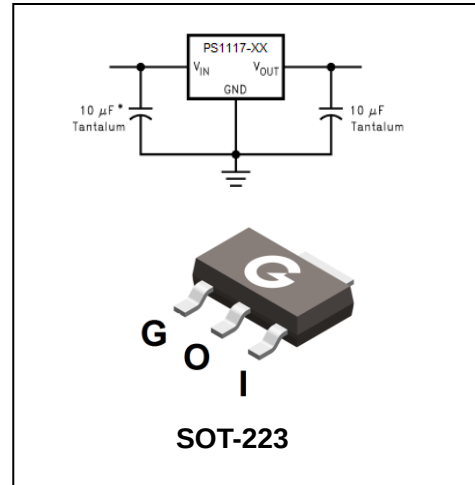

APPLICATIONS

- Post regulator for switching DC/DC converter
- High efficiency linear regulators
- Battery charger
- Battery powered instrumentation

ORDERING INFORMATION

Type No.	Marking	Package Code
PS1117-ADJ	1117-ADJ	SOT-223
PS117-1.5	1117-1.5	SOT-223
PS1117-1.8	1117-1.8	SOT-223
PS1117-2.5	1117-2.5	SOT-223
PS1117-2.85	1117-2.85	SOT-223
PS1117-3.3	1117-3.3	SOT- 223
PS1117-5.0	1117-5.0	SOT-223

MAXIMUM RATING operating temperature range applies unless otherwise specified

Symbol	Parameter	Value	Units
V_I	Input Voltage	15	V
I_{CM}	Maximum Output Current	800	mA
P_D	Power Dissipation	1.1	W
$R_{\theta JA}$	Thermal Resistance Junction-Air	90	$^{\circ}\text{C}/\text{W}$
$R_{\theta JC}$	Thermal Resistance Junction-Case	15	$^{\circ}\text{C}/\text{W}$
T_{OPR}	Operating Temperature Range	-40 ~ +125	$^{\circ}\text{C}$
T_J	Junction Temperature	150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range	-65 ~ +150	$^{\circ}\text{C}$

RECOMMENDED OPERATING CONDITIONS

Parameter	MIN	MAX	UNIT
V_{IN}		13	V
Operating Junction Temperature Range	0	125	$^{\circ}\text{C}$

800 mA Low-Dropout Linear Regulator

PS1117-XX

ELECTRICAL CHARACTERISTICS

Typicals and limits appearing in normal type apply for $T_J=25^{\circ}\text{C}$. Limits appearing in Boldface type apply over the entire junction temperature range for operation, 0°C to 125°C

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Reference Voltage	V_{REF}	PS1117-ADJ $I_{\text{OUT}}=10\text{mA}$, $V_{\text{IN}}-V_{\text{OUT}}=2\text{V}$, $T_J=25^{\circ}\text{C}$	1.238	1.250	1.262	V
		$10\text{mA} \leq I_{\text{OUT}} \leq 800\text{mA}$, $1.4\text{V} \leq V_{\text{IN}}-V_{\text{OUT}} \leq 10\text{V}$	1.225	1.250	1.270	
Output Voltage	V_{OUT}	PS1117-1.5 $I_{\text{OUT}}=10\text{mA}$, $V_{\text{IN}}=3.5\text{V}$, $T_J=25^{\circ}\text{C}$	1.485	1.5	1.515	V
		$10\text{mA} \leq I_{\text{OUT}} \leq 800\text{mA}$, $3.0\text{V} \leq V_{\text{IN}} \leq 10\text{V}$	1.470	1.5	1.530	
		PS1117-1.8 $I_{\text{OUT}}=10\text{mA}$, $V_{\text{IN}}=3.8\text{V}$, $T_J=25^{\circ}\text{C}$	1.782	1.800	1.818	V
		$0\text{mA} \leq I_{\text{OUT}} \leq 800\text{mA}$, $3.2\text{V} \leq V_{\text{IN}} \leq 10\text{V}$	1.746	1.800	1.854	
		PS1117-2.5 $I_{\text{OUT}}=10\text{mA}$, $V_{\text{IN}}=4.5\text{V}$, $T_J=25^{\circ}\text{C}$	2.475	2.500	2.525	V
		$0\text{mA} \leq I_{\text{OUT}} \leq 800\text{mA}$, $3.9\text{V} \leq V_{\text{IN}} \leq 10\text{V}$	2.450	2.500	2.550	
		PS1117-2.85 $I_{\text{OUT}}=10\text{mA}$, $V_{\text{IN}}=4.85\text{V}$, $T_J=25^{\circ}\text{C}$	2.82	2.85	2.88	V
		$0\text{mA} \leq I_{\text{OUT}} \leq 800\text{mA}$, $4.25\text{V} \leq V_{\text{IN}} \leq 10\text{V}$	2.79	2.85	2.91	
		$0\text{mA} \leq I_{\text{OUT}} \leq 800\text{mA}$, $V_{\text{IN}}=4.1\text{V}$	2.79	2.85	2.91	
		PS1117-3.3 $I_{\text{OUT}}=10\text{mA}$, $V_{\text{IN}}=5\text{V}$, $T_J=25^{\circ}\text{C}$	3.267	3.3	3.333	V
		$0\text{mA} \leq I_{\text{OUT}} \leq 800\text{mA}$, $4.75\text{V} \leq V_{\text{IN}} \leq 10\text{V}$	3.235	3.3	3.365	
		PS1117-5.0 $I_{\text{OUT}}=10\text{mA}$, $V_{\text{IN}}=7\text{V}$, $T_J=25^{\circ}\text{C}$	4.95	5.0	5.05	V
		$0\text{mA} \leq I_{\text{OUT}} \leq 800\text{mA}$, $6.5\text{V} \leq V_{\text{IN}} \leq 12\text{V}$	4.9	5.0	5.1	
Line regulation	ΔV_{OUT}	PS1117-ADJ $I_{\text{OUT}}=10\text{mA}$, $1.5\text{V} \leq V_{\text{IN}}-V_{\text{OUT}} \leq 13.75\text{V}$		0.035	0.2	%
		PS1117-1.5 $I_{\text{OUT}}=10\text{mA}$, $1.5\text{V} \leq V_{\text{IN}}-V_{\text{OUT}} \leq 10\text{V}$		1	6	mV
		PS1117-1.8 $I_{\text{OUT}}=10\text{mA}$, $3.2\text{V} \leq V_{\text{IN}} \leq 10\text{V}$		1	6	mV

800 mA Low-Dropout Linear Regulator

PS1117-XX

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Line regulation	ΔV_{OUT}	PS1117-2.5 $I_{OUT}=10mA, 3.9V \leq V_{IN} \leq 10V$		1	6	mV
		PS1117-2.85 $I_{OUT}=10mA, 4.25V \leq V_{IN} \leq 10V$		1	6	mV
		PS1117-3.3 $I_{OUT}=10mA, 4.75V \leq V_{IN} \leq 15V$		1	6	mV
		PS1117-5.0 $I_{OUT}=10mA, 6.5V \leq V_{IN} \leq 15V$		1	10	mV
Load regulation	ΔV_{OUT}	PS1117-ADJ $V_{IN}-V_{OUT}=3V, 10 \leq I_{OUT} \leq 800mA$		0.2	0.4	%
		PS1117-1.5 $V_{IN}-V_{OUT}=2V, 10 \leq I_{OUT} \leq 800mA$		1	10	mV
		PS1117-1.8 $V_{IN}=3.2V, 0 \leq I_{OUT} \leq 800mA$		1	10	mV
		PS1117-2.5 $V_{IN}=3.9V, 0 \leq I_{OUT} \leq 800mA$		1	10	mV
		PS1117-2.85 $V_{IN}=4.25V, 0 \leq I_{OUT} \leq 800mA$		1	10	mV
		PS1117-3.3 $V_{IN}=4.75V, 0 \leq I_{OUT} \leq 800mA$		1	10	mV
		PS1117-5.0 $V_{IN}=6.5V, 0 \leq I_{OUT} \leq 800mA$		1	15	mV
Dropout Voltage	$V_{IN}-V_{OUT}$	$I_{OUT}=100mA$ $I_{OUT}=500mA$ $I_{OUT}=800mA$		1.1 1.15 1.2	1.25 1.3 1.4	V
Current Limit		$V_{IN}-V_{OUT}=1.5V$	1	1.5	2	A
Minimum Load Current	I_{LIMIT}	PS1117-ADJ $V_{IN}=15V$		1.7	5	mA

800 mA Low-Dropout Linear Regulator





PS1117-XX

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Quiescent Currnt		PS1117-1.5 $V_{IN}-V_{OUT}=2V$		5	10	mA
		PS1117-1.8 $V_{IN}\leq 15V$		5	10	mA
		PS1117-2.5 $V_{IN}\leq 15V$		5	10	mA
		PS1117-2.85 $V_{IN}\leq 10V$		5	10	mA
		PS1117-3.3 $V_{IN}\leq 15V$		5	10	mA
		PS1117-5.0 $V_{IN}\leq 15V$		5	10	mA
Thermal Regulation		$T_A=25^{\circ}C$, 30ma Pulse		0.01	0.1	%/W
Ripple Regulation	I _{LIMIT}	$f_{RIPPLE}=120Hz, V_{IN}-V_{OUT}=3V, V_{RIPPLE}=1V_{PP}$	60	75		dB
Ajust Pin Current				60	120	uA
Ajust Pin Current Change		$10\leq I_{OUT}\leq 800mA$		0.2	5	uA

800 mA Low-Dropout Linear Regulator

PS1117-XX

TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

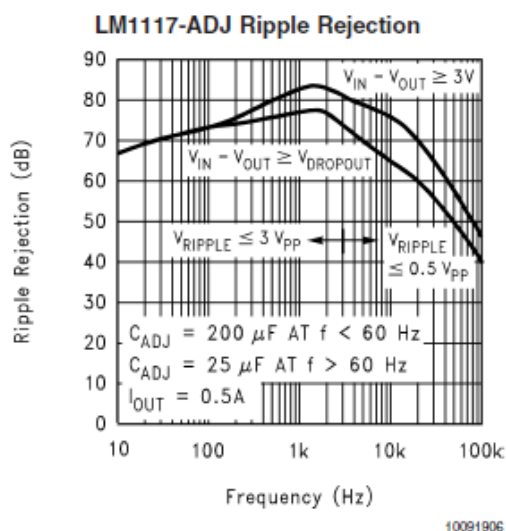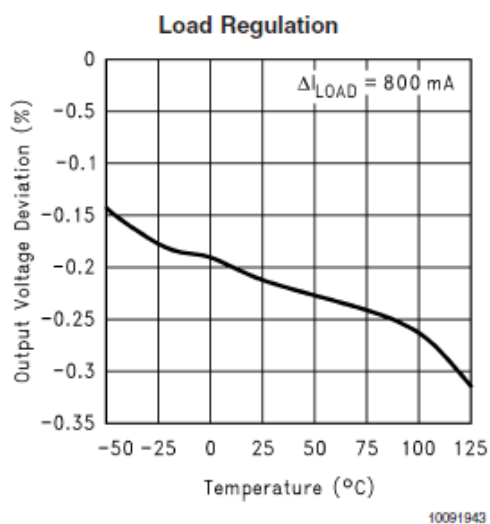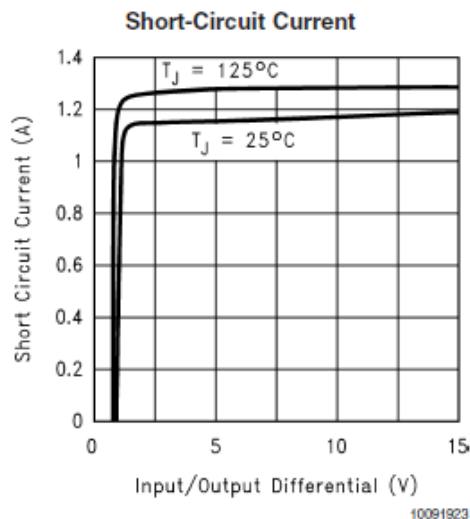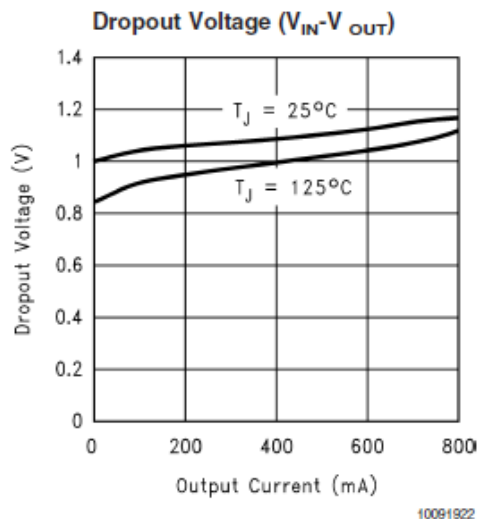


800 mA Low-Dropout Linear Regulator

PS1117-XX


PACKAGE OUTLINE

Plastic surface mounted package

SOT-223

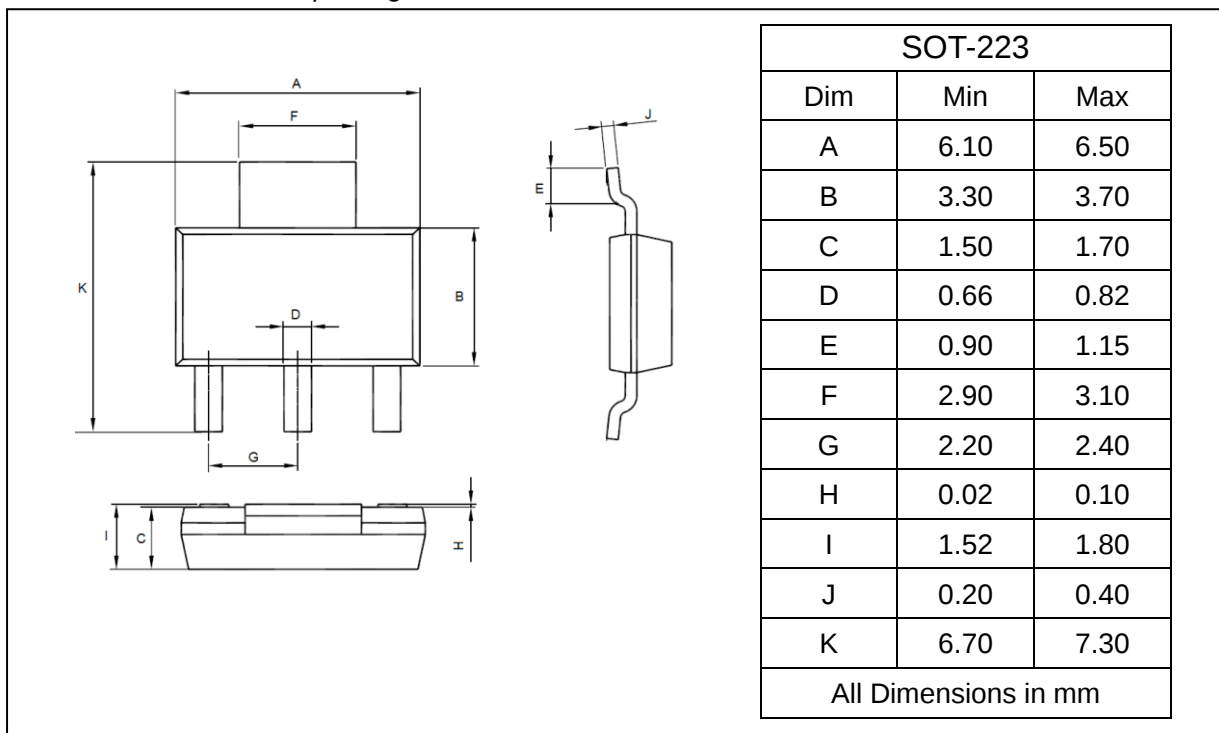

SOLDERING FOOTPRINT

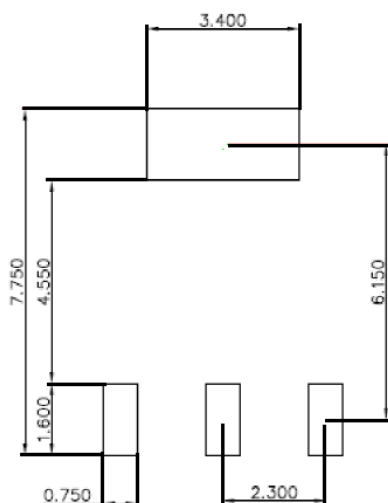

Unit: mm

PACKAGE INFORMATION

Device	Package	Shipping
PS1117-XX	SOT-223	4000pcs / Tape & Reel