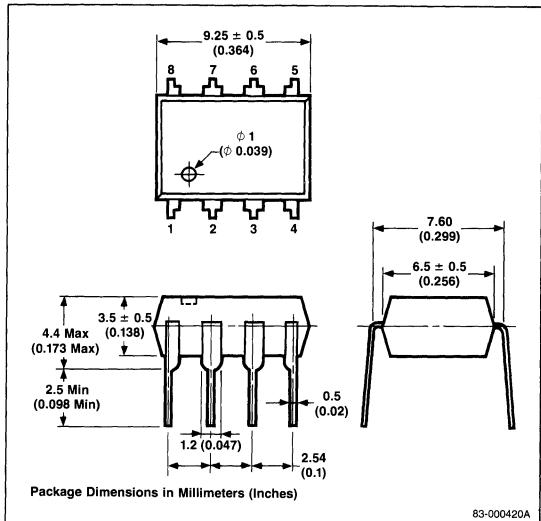


Description

The PS2006B and PS2006B(1) are high speed photo couplers containing a GaAsP light emitting diode and a p-n photo diode connected to a high speed transistor.

The CTR are 15%min for PS2006B and 7% min for PS2006B(1).

Package Dimensions



Features

- High isolation voltage: 3000V_{DC} min
- High speed response: t_{PHL}, t_{PLH} = 300ns typ
- Compact, dual in-line plastic package
- Equivalent to 6N135, 6N136

Applications

- Interface circuit for various instruments and control equipment
- Floating power supply feedback networks
- Computer and peripheral manufacture
- Pulse transformer
- High speed digital and analog line receivers

Absolute Maximum Ratings

T_A = +25°C

Diode

| | |
|---------------------------------|----|
| Reverse Voltage, V _R | 5V |
|---------------------------------|----|

| | |
|---------------------------------|------|
| Forward Current, I _F | 25mA |
|---------------------------------|------|

| | |
|-----------------------------------|------|
| Power Dissipation, P _D | 45mW |
|-----------------------------------|------|

Detector

| | |
|---------------------------------|---------------|
| Supply Voltage, V _{CC} | -0.5V to +15V |
|---------------------------------|---------------|

| | |
|--------------------------------|---------------|
| Output Voltage, V _O | -0.5V to +15V |
|--------------------------------|---------------|

| | |
|--------------------------------|-----|
| Output Current, I _O | 8mA |
|--------------------------------|-----|

| | |
|---|----|
| Emitter to Base Voltage, V _{EBO} | 5V |
|---|----|

| | |
|-----------------------------------|-------|
| Power Dissipation, P _D | 100mW |
|-----------------------------------|-------|

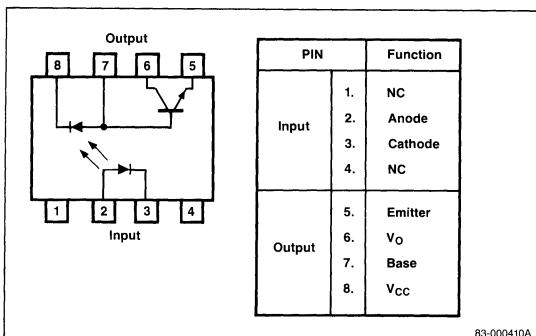
| | |
|-------------------------------------|---------------------|
| Isolation Voltage ¹ , BV | 3000V _{DC} |
|-------------------------------------|---------------------|

| | |
|---------------------------------------|-----------------|
| Storage Temperature, T _{STG} | -55°C to +125°C |
|---------------------------------------|-----------------|

| | |
|---|-----------------|
| Operating Temperature, T _{OPT} | +55°C to +100°C |
|---|-----------------|

5

Pin Connection



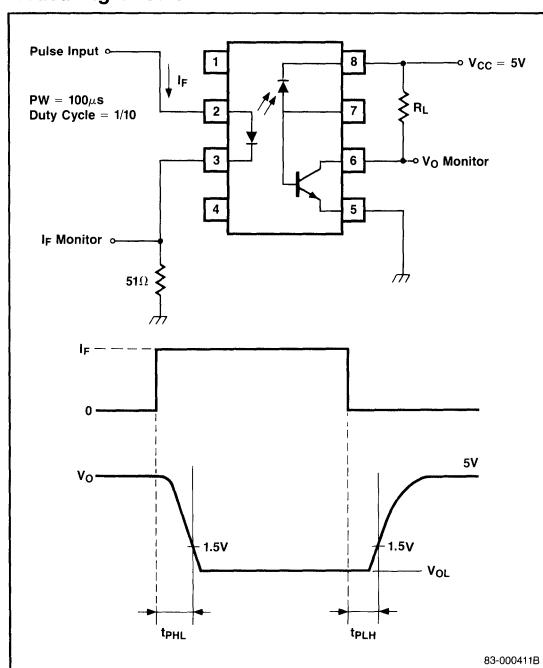
Electrical Characteristics $T_A = +25^\circ\text{C}$

| Parameter | Symbol | Limits | | | Test Conditions |
|--|-------------------------|-------------|-------------|----------------------|---|
| | | Min | Typ | Max | |
| Diode | | | | | |
| Forward Voltage | V_F | 1.43 | 1.7 | V | $I_F = 16\text{mA}$ |
| Reverse Current | I_R | 0.01 | 10 | μA | $V_R = 5\text{V}$ |
| Forward Voltage Temperature Coefficient | $\Delta V_F / \Delta T$ | -1.51 | | mV/ $^\circ\text{C}$ | $I_F = 16\text{mA}$ |
| Capacitance | C_T | 60 | | pF | $V = 0,$ $f = 1\text{MHz}$ |
| Detector | | | | | |
| High Level Output Current | I_{OH^1} | 3 | 500 | nA | $I_F = 0\text{mA},$ $V_{CC} = 5.5\text{V}$ $V_O = 5.5\text{V}$ |
| High Level Output Current | I_{OH^2} | | 100 | μA | $I_F = 0\text{mA},$ $V_{CC} = 15\text{V}$ $V_O = 15\text{V}$ |
| DC Current Gain | h_{FE} | 120 | | | $V_O = 5\text{V},$ $I_O = 3\text{mA}$ |
| Coupled | | | | | |
| Current Transfer Ratio | CTR | 15/7 | 22 | % | $I_F = 16\text{mA},$ $V_{CC} = 4.5\text{V}$ $V_O = 0.4\text{V}$ |
| Low Level Output Voltage | V_{OL} | 0.1 | 0.4 | V | $I_F = 16\text{mA},$ $V_{CC} = 4.5\text{V}$ $I_O = 2.4\text{mA}/$ 1.1mA |
| Low Level Supply Current | I_{CCL} | 50 | | μA | $I_F = 16\text{mA},$ $V_O = \text{Open},$ $V_{CC} = 15\text{V}$ |
| High Level Supply Current | I_{CCH} | 0.01 | 1 | μA | $I_F = 0\text{mA},$ $V_O = \text{Open},$ $V_{CC} = 15\text{V}$ |
| Isolation Resistance | R_{1-2} | 10^{12} | | Ω | $V_{IN-OUT} =$ 1kV |
| Isolation Capacitance | C_{1-2} | 0.7 | | pF | $V = 0,$ $f = 1\text{MHz}$ |
| Propagation Delay Time to Low Output Level | t_{PHL^2} | 0.3/ 0.5 | 0.8/ 1.5 | μs | $I_F = 16\text{mA},$ $V_{CC} = 5\text{V}$ $R_L = 1.9\text{k}\Omega/$ $4.1\text{k}\Omega$ |
| Propagation Delay Time to High Output Level | t_{PLH^2} | 0.3/ 0.8 | 0.8/ 1.5 | μs | $I_F = 16\text{mA},$ $V_{CC} = 5\text{V}$ $R_L = 1.9\text{k}\Omega/$ $4.1\text{k}\Omega$ |

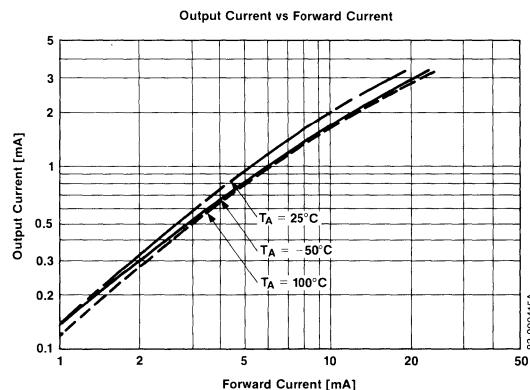
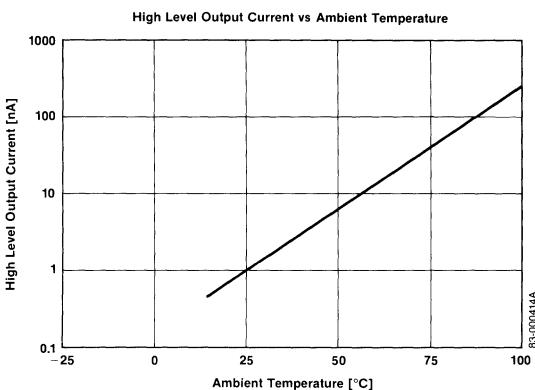
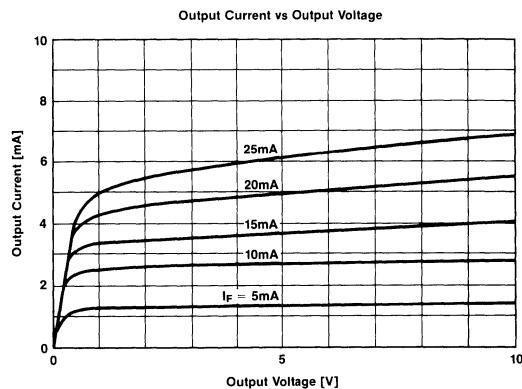
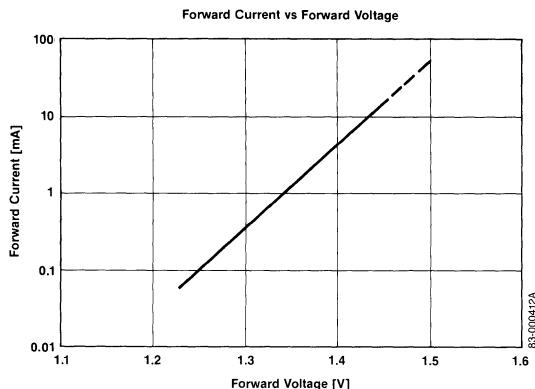
Notes: In the "Min", "Typ" and "Max" columns, figures to the left and right of the slash represent values for the PS2006B and PS2006B(1), respectively.

1. Measuring Conditions: DC voltage for 1 min at $T_A = +25^\circ\text{C}$, RH = 60% between input (pins 1, 2, 3, and 4 common) and output (pins 5, 6, 7, and 8 common).

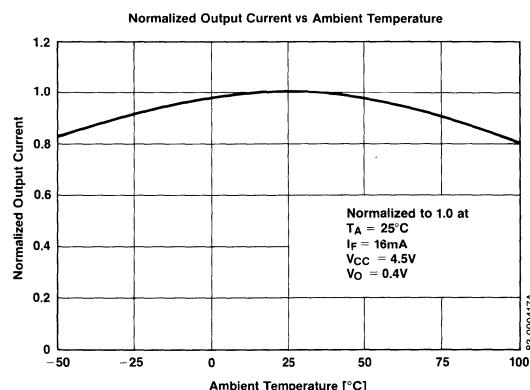
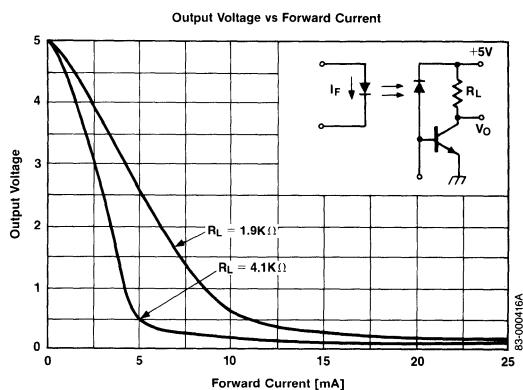
2. Measuring Circuit.

Measuring circuit

83-000411B

Typical Characteristics $T_A = +25^\circ\text{C}$ 

5



Typical Characteristics (cont) $T_A = +25^\circ\text{C}$ 