




Suitable for high-d
installation of mini
lock(lockless) switc

● Moq: 1000PCS

■ Technical Feature

Environmental Temperature	Relative Humidity	Rated Load	Contact Resistance	Insulation Resistance	Withstand Voltage	Operation Force
-25--+70°C	(40°C) ≤95%	DC12V 50mA	≤0.03Ω	≥1000Ω	AC250V 50Hz/min	100~300gf 100

■ Figure

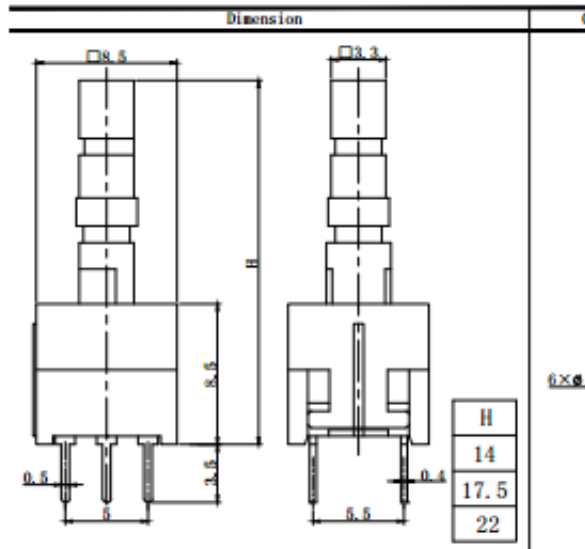

www.khan.cn

■ Soldering conditions

- condition for reflow

Available for surface mount/resistance high temper
1、heating method double heating method with in
2、Temperature measurement:0.1-φ0.2CA (K) or CC (foil surface). A heat resistive tape should be us
3、Temperatuer profile

