




PHASE NOISE (1 Hz BW, typical)

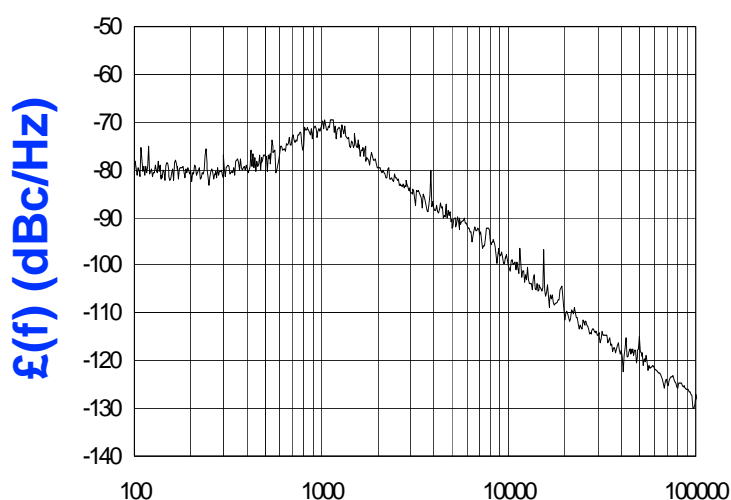

FEATURES

- Frequency Range: 865 - 870 MHz
- Tuning Voltage: Vdc
- PLL-24 - Style Package

APPLICATIONS

- Basestations
- Satellite Communications
- Mobile Radios

PERFORMANCE SPECIFICATIONS

	VALUE	UNITS
Oscillation Frequency Range	865 - 870	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-100	dBc/Hz
Harmonic Suppression (2nd, typ.)	-15	dBc
Tuning Voltage		Vdc
Tuning Sensitivity (avg.)	1250	MHz/V
Power Output	2.5±2.5	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	50	pF
Pushing	1	MHz/V
Pulling (14 dB Return Loss, Any Phase)	1	MHz
Operating Temperature Range	-40 to 85	°C
Package Style	PLL-24	

POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	30	mA

All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES


- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs

NOTES:


Reference Oscillator Signal: $5 \text{ MHz} < f_{\text{osc}} < 100 \text{ MHz}$
 Frequency Synthesizer: Analog Devices - ADF4106

www.DataSheet4U.com


TUNING CURVE, typ.

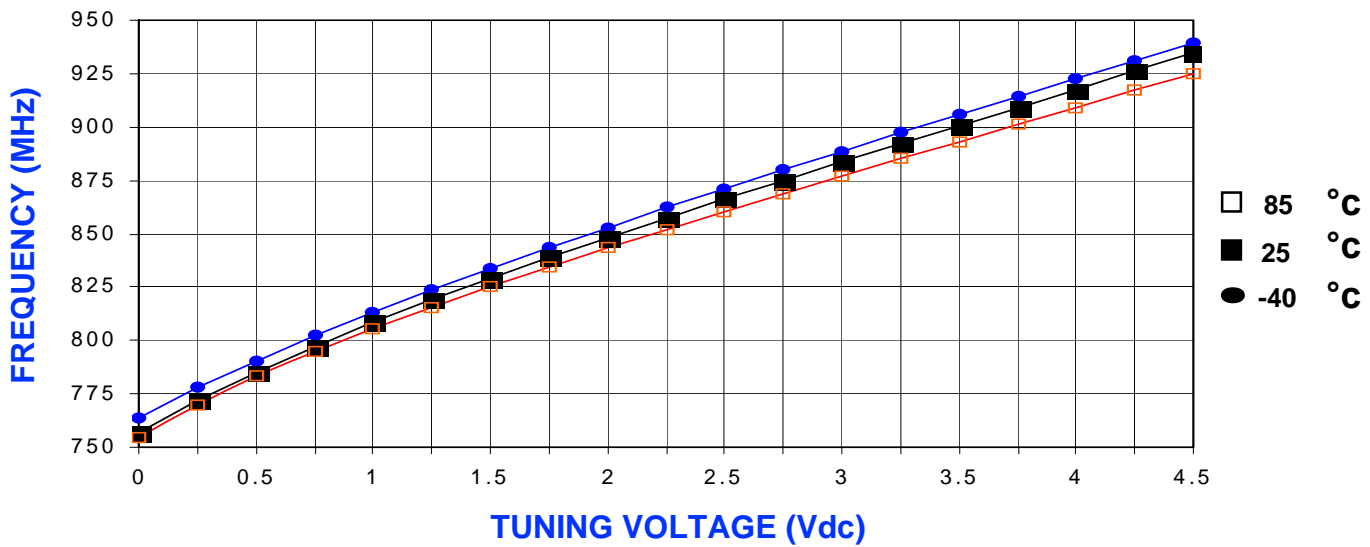

POWER CURVE, typ.

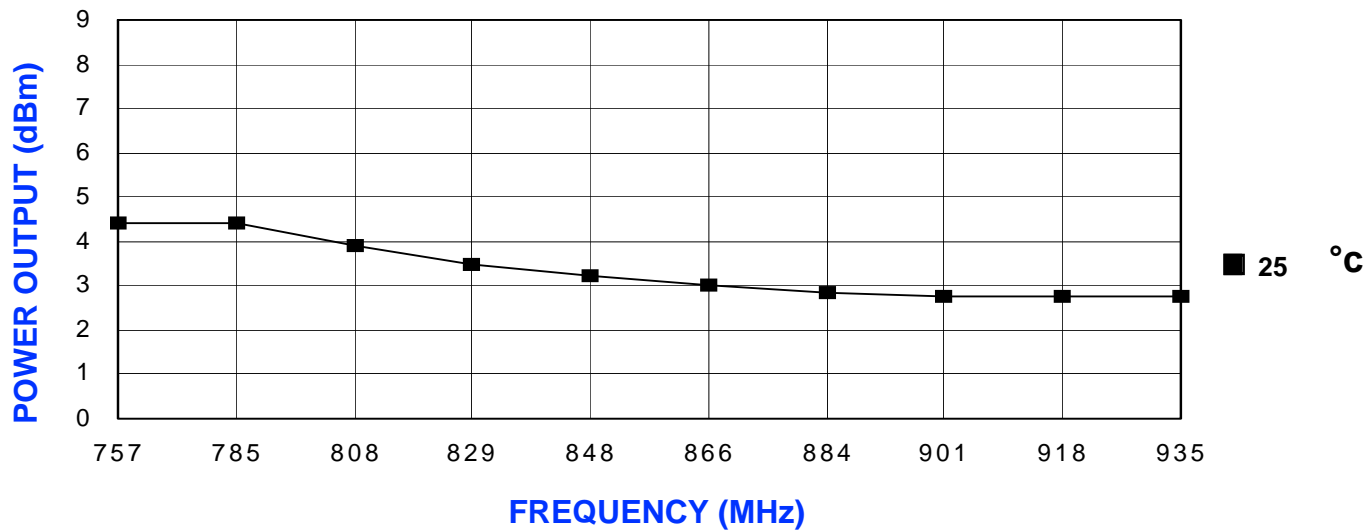

PHYSICAL DIMENSIONS

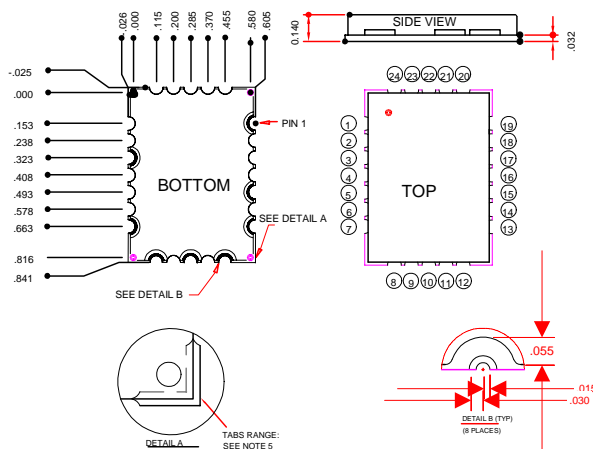

1. The inside radius of all 24 half holes at the perimeter of the board are plated to provide a surface for the attachment of the PLL Module to the PCB. 16 pads are for grounding, 8 pads are for signal interface.
2. The surface of the shield is tin-plated and may be soldered to. The shield's base metal is cold-rolled steel.
3. The ground plane on the bottom side is ground and attaches to a ground track on the top side of the board as well as to the shield.
4. Unless otherwise noted all dimensions are in inches.
5. Unless otherwise noted all tolerances are as follows:
.xxx = ± .010.

- P1 RF OUTPUT
P2-4 GROUND
P5 REFERENCE OSCILLATOR INPUT
P6 GROUND
P7 CLOCK
P8 DATA
P9 GROUND
P10 LOAD ENABLE
P11 GROUND
P12 LOCK DETECT
P13 VCC
P14 GROUND
P15 GROUND
P16 GROUND
P17 NO CONNECTION
P18-24 GROUND