

1. PART NO. EXPRESSION :

PSB07051R0MZ F

(a) (b) (c) (d)(e)(f)

(a) Series code

(b) Dimension code


(c) Inductance code : 1R0 = 1.0uH

(d) Tolerance code : K = $\pm 10\%$, L = $\pm 15\%$, M = $\pm 20\%$

(e) X, Y, Z : Standard part

(f) F : Lead Free


2. CONFIGURATION & DIMENSIONS :

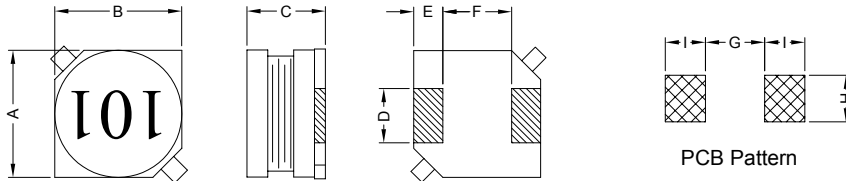


Unit:m/m

| A | B | C | D | E | F | G | H | I |
|---------------|---------------|---------------|---------------|---------------|---------------|----------|----------|----------|
| 7.0 \pm 0.3 | 7.0 \pm 0.3 | 4.6 \pm 0.3 | 2.0 \pm 0.2 | 1.5 \pm 0.2 | 4.0 \pm 0.2 | 3.7 Ref. | 2.2 Ref. | 1.9 Ref. |

3. SCHEMATIC :



4. MATERIALS :



(a) Core : DR Ferrite Core

(b) Base : LCP

(c) Wire : Enamelled Copper Wire

(d) Terminal : Tinned Copper Plate

(e) Adhesive : Epoxy

(f) Ink : Bon Margue

5. GENERAL SPECIFICATION :

- a) Temp. rise : 40°C Max.
- b) Rated current : Base on temp. rise & $\Delta L/L0A = 10\%$ Max.
- c) Storage temp. : -40°C to +125°C
- d) Operating temp. : -40°C to +85°C
- e) Resistance to solder heat : 260°C.10 secs




6. ELECTRICAL CHARACTERISTICS :

| Part No. | Inductance (μ H) | Test Frequency (Hz) | RDC (m Ω) Max. | IDC (A) Max. |
|---------------|--------------------------|---------------------------|------------------------------|--------------------|
| PSB07051R0MZF | 1.0 \pm 20% | 1V / 100K | 23 | 3.50 |
| PSB07051R5MZF | 1.5 \pm 20% | 1V / 100K | 28 | 3.20 |
| PSB07052R2MZF | 2.2 \pm 20% | 1V / 100K | 33 | 3.00 |
| PSB07053R3MZF | 3.3 \pm 20% | 1V / 100K | 40 | 2.70 |
| PSB07054R7MZF | 4.7 \pm 20% | 1V / 100K | 50 | 2.50 |
| PSB07056R8MZF | 6.8 \pm 20% | 1V / 100K | 60 | 2.20 |
| PSB0705100MZF | 10.0 \pm 20% | 1V / 100K | 75 | 2.00 |
| PSB0705120MZF | 12.0 \pm 20% | 1V / 100K | 85 | 1.90 |
| PSB0705150LZF | 15.0 \pm 15% | 1V / 100K | 90 | 1.50 |
| PSB0705180LZF | 18.0 \pm 15% | 1V / 100K | 100 | 1.40 |
| PSB0705220LZF | 22.0 \pm 15% | 1V / 100K | 120 | 1.30 |
| PSB0705270LZF | 27.0 \pm 15% | 1V / 100K | 150 | 1.20 |
| PSB0705330LZF | 33.0 \pm 15% | 1V / 100K | 180 | 1.10 |
| PSB0705390LZF | 39.0 \pm 15% | 1V / 100K | 190 | 1.00 |
| PSB0705470LZF | 47.0 \pm 15% | 1V / 100K | 220 | 0.90 |
| PSB0705560KZF | 56.0 \pm 10% | 1V / 100K | 250 | 0.85 |
| PSB0705680KZF | 68.0 \pm 10% | 1V / 100K | 270 | 0.80 |
| PSB0705820KZF | 82.0 \pm 10% | 1V / 100K | 380 | 0.70 |
| PSB0705101KZF | 100.0 \pm 10% | 1V / 100K | 420 | 0.65 |
| PSB0705121KZF | 120.0 \pm 10% | 1V / 100K | 520 | 0.60 |
| PSB0705151KZF | 150.0 \pm 10% | 1V / 100K | 580 | 0.50 |
| PSB0705181KZF | 180.0 \pm 10% | 1V / 100K | 650 | 0.45 |
| PSB0705221KZF | 220.0 \pm 10% | 1V / 100K | 880 | 0.40 |
| PSB0705271KZF | 270.0 \pm 10% | 1V / 100K | 990 | 0.35 |
| PSB0705331KZF | 330.0 \pm 10% | 1V / 100K | 1100 | 0.32 |
| PSB0705391KZF | 390.0 \pm 10% | 1V / 100K | 1400 | 0.30 |
| PSB0705471KZF | 470.0 \pm 10% | 1V / 100K | 1900 | 0.28 |
| PSB0705561KZF | 560.0 \pm 10% | 1V / 100K | 2200 | 0.25 |
| PSB0705681KZF | 680.0 \pm 10% | 1V / 100K | 2500 | 0.22 |
| PSB0705821KZF | 820.0 \pm 10% | 1V / 100K | 2900 | 0.20 |
| PSB0705102KZF | 1000.0 \pm 10% | 1V / 100K | 4000 | 0.18 |




7. CHARACTERISTICS CURVES :


@ TEMP. RISE VS. DC SUPERPOSITION RESPONSE CURVE

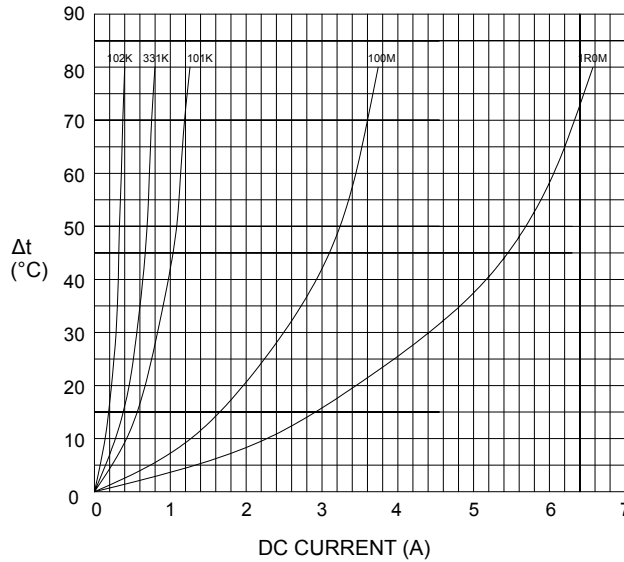


@ INDUCTANCE VS. FREQUENCY RESPONSE CURVE

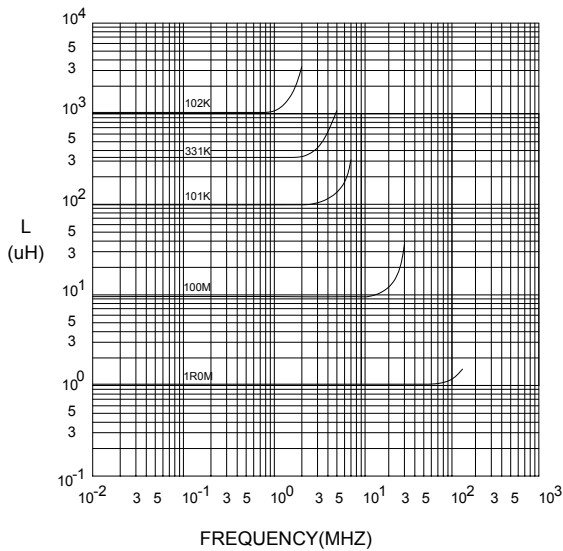

@ INDUCTANCE VS. DC SUPERPOSITION RESPONSE CURVE

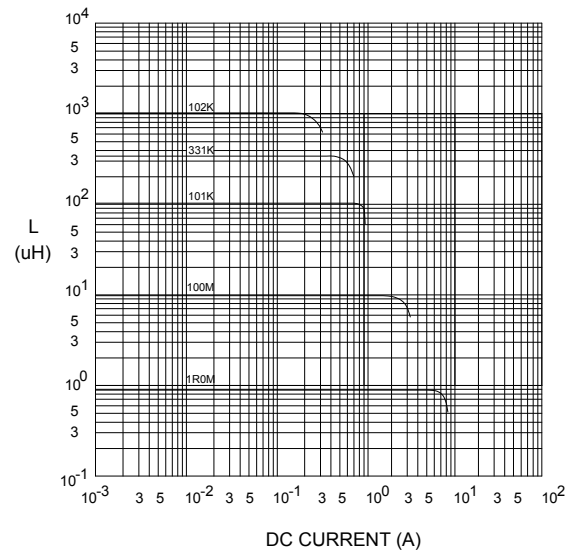


RECOMMENDED SOLDERING CONDITIONS REFLOW SOLDERINGS

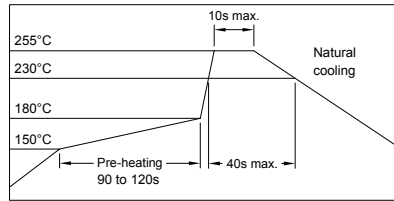


8. PACKAGING INFORMATION :

(1) CONFIGURATION

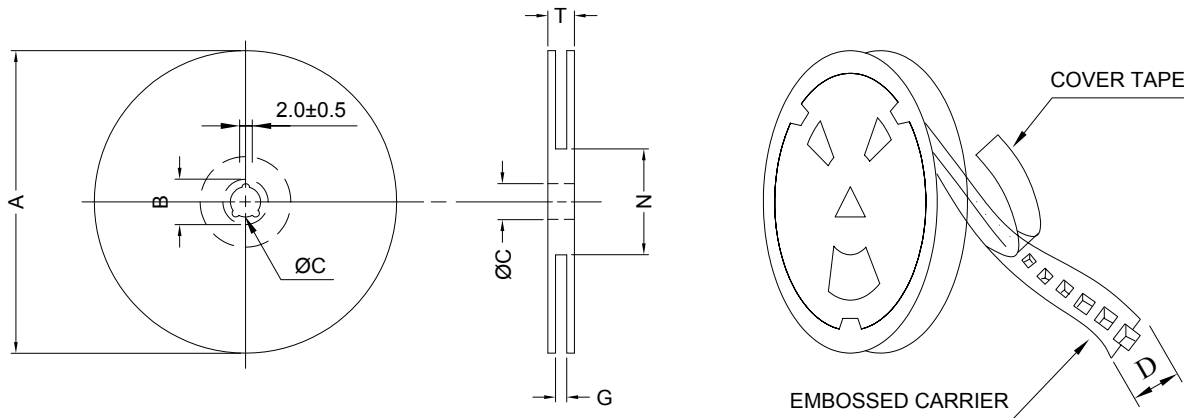

* CARRIER TAPE WIDTH : D

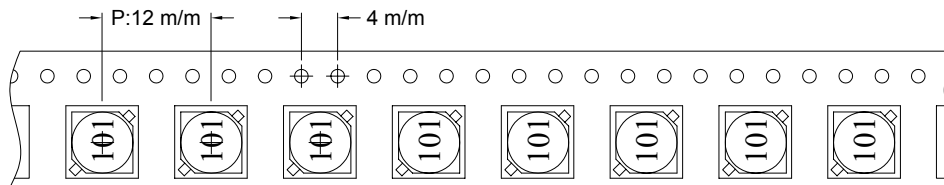

(2) DIMENSIONS

Unit:m/m

| STYLE | A | B | C | D | G | N | T |
|-------|-----|--------|----|----|------------------|------------------|------|
| 13-16 | 330 | 21±0.8 | 13 | 16 | 18 ⁺⁰ | 50 ⁻⁰ | 22.4 |

(3) Q'TY & G.W. PER PACKAGE

| SERIES | INNER : REEL | | | OUTER : CARTON | | |
|---------|--------------|-----------|-------|----------------|-----------|--------------|
| | Q'TY (PCS) | G.W. (gw) | STYLE | Q'TY (PCS) | G.W. (Kg) | SIZE (cm) |
| PSB0705 | 1000 | 680 | 13-16 | 6000 | 7.6 | 40 x 40 x 24 |

www.DataSheet4U.com



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.05.2008

9. RELIABILITY AND TEST CONDITION :

| TEST ITEM | SPECIFICATION | TEST CONDITION |
|-------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| SOLDERABILITY | MORE THAN 90% OF THE TERMINAL ELECTRODE SHALL BE COVERED WITH FRESH SOLDER. | PREHEAT : 125±25°C FOR 60 SECONDS SOLDER : 99%Sn/0.3%Ag/0.7%Cu OR EQUIVALENT SOLDER TEMP. : 245±5°C FLUX : ROSIN DIP TIME : 4±1 SECONDS |
| THERMAL SHOCK TEST (TEMP. CYCLE) | INDUCTANCE SHALL NOT CHANGE MORE THAN ±20% | ROOM TEMP. → -25±2°C 15 MINUTES → 30 MINUTES ROOM TEMP. → 85±2°C 15 MINUTES → 30 MINUTES TOTAL : 50 CYCLES |
| HUMIDITY RESISTANCE TEST | | TEMPERATURE : 40±2°C HUMIDITY : 90 ~ 95% APPLIED CURRENT : PER SPEC. TIME : 500 HOURS |
| HIGH TEMP. RESISTANCE TEST | | TEMPERATURE : 85±2°C APPLIED CURRENT : PER SPEC. TIME : 500 HOURS |



10. UL CARD :

OBMW2 **November 30, 2000**
Magnet Wire - Component
PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD **E201757**
607 BAOLONG INDUSTRIAL ESTATE LONGGANG, SHENZHEN
GUANGDONG CHINA

| Mtl Dsg | Coating Type | TC | ANSI Type | TI |
|----------|--------------------------------|-----------------------|----------------|--------------|
| UEW/U | BC Polyurethane | — | — | 130 |
| PEW/U | Polyester | — | MW5-C | 155°C |
| PEWH/U | Modified Polyester | — | MW30-C | 180 |
| PEW-NY/U | Polyester | Polyamide | MW24-C | 155 |
| HAI/U | Polyester(Amide)(Imide) | Polyamideimide | MW35,73 | 200 |
| UEW-NY/U | Polyurethane | Polyamide | MW80-C | 155 |
| | | | MW28-C | 130 |

Marking: Company name and material designation or marked designation on package or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions

1/3/2001 **Underwriters Laboratories Inc.** **Card 1 of 2**

SUMITOMO CHEMICAL CO LTD **E54705 (M)**
5-33 KITAHAMA 4-CHOME CHUO-KO, OSAKA JAPAN

| Mtl Dsg | Col | Min Thk mm | UL94 Flame Class | Elec | RTI | | H W I | H A I | H V T R | D 4 5 | C T I |
|-----------------------------------------------------------------------------------------------------------------|------------|------------|------------------|------|----------|--------------|-------|-------|---------|-------|-------|
| | | | | | with Imp | Mech w/o Imp | | | | | |
| Liquid crystal polyester (LCP), designated "EKONOL" or "SUMIKASUPER", furnished in the form of pellets, (Contd) | | | | | | | | | | | |
| E4008, E400X | NC, BK | 0.30 | 94V-0 | 130 | 130 | 130 | — | — | — | — | — |
| | | 0.75 | 94V-0 | 130 | 130 | 130 | 3 | 4 | — | — | — |
| | | 1.5 | 94V-0 | 130 | 130 | 130 | 2 | 4 | — | — | — |
| | | 3.0 | 94V-0 | 130 | 130 | 130 | 1 | 4 | 0 | 5 | 4 |
| E4008 | NC, WT, BK | 0.30 | 94V-0 | 130 | 130 | 130 | — | — | — | — | — |
| | | 0.75 | 94V-0 | 220 | 180 | 220 | 3 | 4 | — | — | — |
| | | 1.5 | 94V-0 | 220 | 200 | 240 | 2 | 4 | — | — | — |
| | | 3.0 | 94V-0 | 220 | 200 | 240 | 1 | 4 | 0 | 5 | 4 |
| E4010 | NC, BK | 0.30 | 94V-0 | 130 | 130 | 130 | — | — | — | — | — |
| | | 0.75 | 94V-0 | 220 | 180 | 220 | 3 | 4 | — | — | — |
| | | 1.5 | 94V-0 | 220 | 200 | 240 | 2 | 4 | — | — | — |
| | | 3.0 | 94V-0 | 220 | 200 | 240 | 1 | 4 | 0 | 5 | 4 |
| E400(Y)L, E4008L | NC, BK | 0.30 | 94V-0 | 130 | 130 | 130 | — | — | — | — | — |
| | | 0.75 | 94V-0 | 130 | 130 | 130 | 3 | 4 | — | — | — |
| | | 1.5 | 94V-0 | 130 | 130 | 130 | 2 | 4 | — | — | — |
| | | 3.0 | 94V-0 | 130 | 130 | 130 | 1 | 4 | 0 | 5 | 4 |
| E4810 | NC, BK | 0.30 | 94V-0 | 130 | 130 | 130 | — | — | — | — | — |
| | | 0.75 | 94V-0 | 130 | 130 | 130 | 0 | 4 | — | — | — |
| | | 1.5 | 94V-0 | 130 | 130 | 130 | 0 | 4 | — | — | — |
| | | 3.0 | 94V-0 | 130 | 130 | 130 | 1 | 4 | 0 | 5 | 4 |

(X) Denotes any number 1 thru 9.
(Y) Denotes any number 1 thru 7.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

05.05.2008



SUPERWORLD ELECTRONICS (S) PTE LTD