


Thyristor Modules Thyristor/Thyristor Modules

PSKT 96

$$\begin{aligned} I_{\text{TRMS}} &= 2 \times 180 \text{ A} \\ I_{\text{TAVM}} &= 2 \times 105 \text{ A} \\ V_{\text{RRM}} &= 600-1800 \text{ V} \end{aligned}$$

Preliminary Data Sheet

V_{RSM} V_{DSM} (V)	V_{RRM} V_{DRM} (V)	Type
700	600	PSKT 96/06
900	800	PSKT 96/08
1300	1200	PSKT 96/12
1500	1400	PSKT 96/14
1700	1600	PSKT 96/16
1900	1800	PSKT 96/18

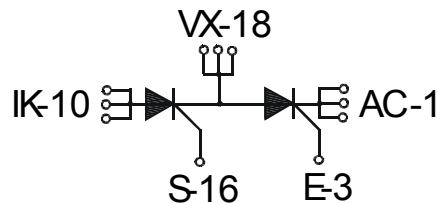

Symbol	Test Conditions	Maximum Ratings
I_{TRMS}		180 A
I_{TAVM}	$T_{\text{C}} = 85^\circ \text{C}$, 180° sine	105 A
I_{TSM}	$T_{\text{VJ}} = 45^\circ \text{C}$ $t = 10 \text{ ms}$ (50 Hz), sine	2250 A
	$V_{\text{R}} = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	2400 A
	$T_{\text{VJ}} = 125^\circ \text{C}$ $t = 10 \text{ ms}$ (50 Hz), sine	2000 A
	$V_{\text{R}} = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	2150 A
$\int i^2 dt$	$T_{\text{VJ}} = 45^\circ \text{C}$ $t = 10 \text{ ms}$ (50 Hz), sine	25300 A ² s
	$V_{\text{R}} = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	23900 A ² s
	$T_{\text{VJ}} = 125^\circ \text{C}$ $t = 10 \text{ ms}$ (50 Hz), sine	20000 A ² s
	$V_{\text{R}} = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	19100 A ² s
$(di/dt)_{\text{cr}}$	$T_{\text{VJ}} = 125^\circ \text{C}$ repetitive, $I_{\text{T}} = 250 \text{ A}$ $f=50\text{Hz}$, $t_p=200\mu\text{s}$	150 A/ μs
	$V_{\text{D}}=2/3V_{\text{DRM}}$	
	$I_{\text{G}}=0.45 \text{ A}$ non repetitive, $I_{\text{T}} = I_{\text{TAVM}}$ $di_{\text{G}}/dt=0.45\text{A}/\mu\text{s}$	500 A/ μs
$(dv/dt)_{\text{cr}}$	$T_{\text{VJ}} = 125^\circ \text{C}$ $V_{\text{D}}=2/3V_{\text{DRM}}$ $R_{\text{GK}} = \infty$, method 1 (linear voltage rise)	1000 V/ μs
P_{GM}	$T_{\text{VJ}} = 125^\circ \text{C}$ $t_p=30\mu\text{s}$	≤ 10 W
	$I_{\text{T}}=I_{\text{TAVM}}$ $t_p=300\mu\text{s}$	≤ 5 W
P_{GAVM}		0.5 W
V_{RGM}		10 V
T_{VJ}		-40... + 125 °C
T_{VJM}		125 °C
T_{stg}		-40... + 125 °C
V_{ISOL}	50/60 Hz, RMS $t = 1 \text{ min}$	3000 V~
	$I_{\text{ISOL}} \leq 1 \text{ mA}$ $t = 1 \text{ s}$	3600 V~
M_{d}	Mounting torque (M4)	1.5 - 2.0 Nm
		14 - 18 lb.in.
Weight	typ.	24 g

Data according to IEC 60747 refer to a single thyristor unless otherwise stated

Features

- Isolation voltage 3600 V~
- Planar glass passivated chips
- Low forward voltage drop
- Leads suitable for PC board soldering
- UL registered, E 148688

Applications

- DC motor control
- Light and temperature control
- Softstart AC motor controller
- Solid state switches

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability
- High power density
- Small and light weight

Symbol	Test Conditions	Characteristic Value
$I_{D,R}$	$T_{VJ} = 125^{\circ}\text{C}$, $V_R = V_{RRM}$, $V_D = V_{DRM}$	≤ 5 mA
V_T	$I_T = 300$ A, $T_{VJ} = 25^{\circ}\text{C}$	≤ 1.5 V
V_{TO}	For power-loss calculations only	0.8 V
r_T		2.4 m Ω
V_{GT}	$V_D = 6$ V, $T_{VJ} = 25^{\circ}\text{C}$	≤ 1.5 V
	$T_{VJ} = -40^{\circ}\text{C}$	≤ 1.6 V
I_{GT}	$V_D = 6$ V, $T_{VJ} = 25^{\circ}\text{C}$	≤ 150 mA
	$T_{VJ} = -40^{\circ}\text{C}$	≤ 200 mA
V_{GD}	$T_{VJ} = 125^{\circ}\text{C}$, $V_D = 2/3 V_{DRM}$	≤ 0.2 V
I_{GD}	$T_{VJ} = 125^{\circ}\text{C}$, $V_D = 2/3 V_{DRM}$	≤ 10 mA
I_L	$T_{VJ} = 25^{\circ}\text{C}$, $t_p = 10\mu\text{s}$	≤ 450 mA
	$I_G = 0.45$ A, $di_G/dt = 0.45$ A/ μs	
I_H	$T_{VJ} = 25^{\circ}\text{C}$, $V_D = 6$ V, $R_{GK} = \infty$	≤ 200 mA
t_{gd}	$T_{VJ} = 25^{\circ}\text{C}$, $V_D = 1/2 V_{DRM}$	≤ 2 μs
	$I_G = 0.45$ A, $di_G/dt = 0.45$ A/ μs	
R_{thJC}	per Thyristor; DC	0.26 K/W
	per module	0.13 K/W
R_{thJK}	per Thyristor; sine 180° el	0.46 K/W
	per module	0.23 K/W
d_s	Creeping distance on surface	11.2 mm
d_A	Creeping distance in air	5.0 mm
a	Max. allowable acceleration	50 m/s ²

Package style and outline

Dimensions in mm (1mm = 0.0394")

