

Fast Recovery Epitaxial Diode (FRED) Module


PSKD 75E

$$I_{FAV} = 75 \text{ A}$$

$$V_{RRM} = 200-600 \text{ V}$$

Preliminary Data Sheet

V_{RSM} V	V_{RRM} V	Type
200	200	PSKD 75E/02
400	400	PSKD 75E/04
600	600	PSKD 75E/06



Features

- Package with screw terminals
- Isolation voltage 3000 V~
- Planar glasspassivated chips
- Short recovery time
- Low forward voltage drop
- Short recovery behaviour
- UL registered, E 148688

Applications


- Inductive heating and melting
- Free wheeling diode in converters and motor control circuits
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Package, style and outline

Dimensions in mm (1mm = 0.0394")

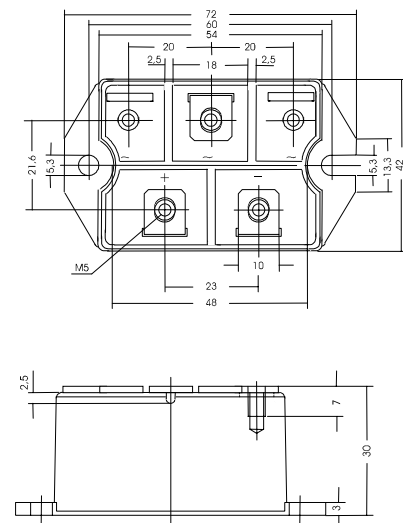

Symbol	Test Conditions			Maximum Ratings	
I_{FAV}	$T_C = 85^\circ\text{C}$			75	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$	$t = 10 \text{ ms}$	(50 Hz), sine	1400	A
		$t = 8.3 \text{ ms}$	(60 Hz), sine	1540	A
	$T_{VJ} = T_{VJM}$	$t = 10 \text{ ms}$	(50 Hz), sine	1250	A
		$t = 8.3 \text{ ms}$	(60 Hz), sine	1370	A
$\int i^2 dt$	$T_{VJ} = 45^\circ\text{C}$	$t = 10 \text{ ms}$	(50 Hz), sine	9800	$\text{A}^2 \text{ s}$
		$t = 8.3 \text{ ms}$	(60 Hz), sine	9840	$\text{A}^2 \text{ s}$
	$T_{VJ} = T_{VJM}$	$t = 10 \text{ ms}$	(50 Hz), sine	7800	$\text{A}^2 \text{ s}$
		$t = 8.3 \text{ ms}$	(60 Hz), sine	7780	$\text{A}^2 \text{ s}$
T_{VJ}				-40 ... + 150	$^\circ\text{C}$
T_{VJM}				150	$^\circ\text{C}$
T_{stg}				-40 ... + 125	$^\circ\text{C}$
V_{ISOL}	50/60 HZ, RMS	$t = 1 \text{ min}$		2500	V ~
	$I_{ISOL} \leq 1 \text{ mA}$	$t = 1 \text{ s}$		3000	V ~
M_d	Mounting torque	(M5)		5	Nm
	Terminal connection torque	(M5)		5	Nm
Weight	typ.			160	g

Symbol	Test Conditions		Characteristic Value	
I_R	$V_R = V_{RRM}$	$T_{VJ} = 25^\circ\text{C}$	$\leq$	250 μA
	$V_R = V_{RRM}$	$T_{VJ} = T_{VJM}$	$\leq$	2.5 mA
V_F	$I_F = 75 \text{ A}$	$T_{VJ} = 25^\circ\text{C}$	$\leq$	1.25 V
t_{rr}	$T_{VJ} = 25^\circ\text{C}$, $I_F = 1 \text{ A}$; $-di/dt = 100 \text{ A}/\mu\text{s}$; $V_R = 30 \text{ V}$		typ.	60 ns
V_{TO}	For power-loss calculations only			0.7 V
r_T	$T_{VJ} = T_{VJM}$			1.55 $\text{m}\Omega$
R_{thJC}	per diode; DC current			0.85 K/W
	per module			0.43 K/W
R_{thJK}	per diode; DC current			1.0 K/W
	per module			0.5 K/W
d_s	Creeping distance on surface			10 mm
d_A	Creeping distance in air			9.4 mm
a	Max. allowable acceleration			50 m/s^2