

System Reset IC Monolithic IC PST85XX Series

Outline

This is a reset IC with In various CPU systems or other logic systems, when the time of a power supply injection and a power supply are severed for a moment, this IC detects supply voltage and applies reset to a system.

PST85 has separated the detecting voltage monitor terminal (VS) and the VDD terminal. Even if monitor voltage VS falls, when an operating limit is reached for another power supply, an output does not become unfixed, and the power supply of IC can maintain low level. It is especially suitable for the power supply surveillance of the low power supply (1V system).

Features

- | | |
|--------------------------------|--|
| 1. High Accuracy | Typ±0.8% (VTH=0.8~1.9V)
Typ±0.5% (VTH=2.0~6.0V) |
| 2. Super low supply current | Typ 0.35μA |
| 3. Operating-voltage range | 0.70V~10V |
| 4. Operating-temperature range | -40~+105°C |
| 5. Detecting voltage rank | 1.2V~6.0V (0.1Vstep) |
| 6. Output type | CMOS output (PST851)
Open drain output (PST852) |


Packages

SSON-4
 SC-82ABB
 SOT-25A


Applications

1. Reset circuits for CPUs and MPUs
2. Reset circuits for logic circuits
3. Battery voltage check circuits
4. Change circuit of a backup circuit
5. Level detector

Block Diagram

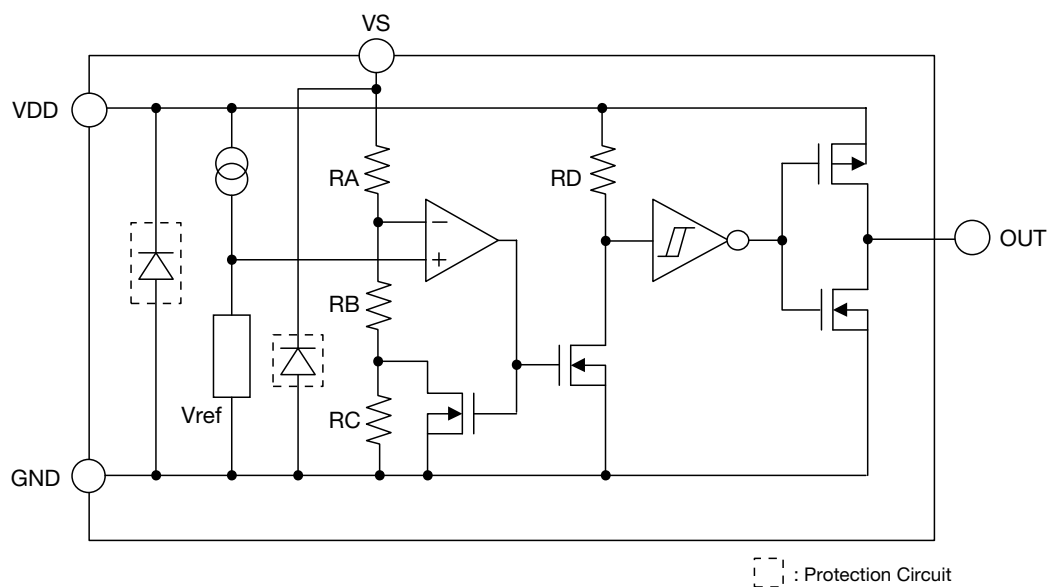


Pin Assignment




SSON-4
(TOP VIEW)

1	GND
2	OUT
3	VS
4	VDD



SC-82ABB
(TOP VIEW)

1	GND
2	VDD
3	VS
4	OUT



SOT-25A
(TOP VIEW)

1	OUT
2	VDD
3	GND
4	NC
5	VS

Pin Description

SSON-4

Pin No.	Pin name	Functions
1	GND	GND Pin
2	OUT	Reset Signal Output Pin
3	VS	Sence Pin
4	V _{DD}	V _{DD} Pin

SC-82ABB

Pin No.	Pin name	Functions
1	GND	GND Pin
2	V _{DD}	V _{DD} Pin
3	VS	Sence Pin
4	OUT	Reset Signal Output Pin

SOT-25A

Pin No.	Pin name	Functions
1	OUT	Reset Signal Output Pin
2	V _{DD}	V _{DD} Pin
3	GND	GND Pin
4	NC	No Connection
5	VS	Sence Pin

Absolute Maximum Ratings


Item	Symbol	Ratings		Units
Supply voltage	V _{DD} max.	-0.3~+12.0		V
Output voltage	OUT	PST851	-0.3~(V _{DD} +0.3)	V
		PST852	-0.3~+12.0	
Output voltage	VS	-0.3~+12.0		V
Input current (V _{DD})	I _{DD}	20		mA
Output current (RESET, $\overline{\text{RESET}}$)	I _{OUT}	20		mA
Power dissipation	P _D	SSON-4	330 (Note1)	mW
		SC-82ABB	150	
		SOT-25A	150	
Operating temperature	T _{OPR}	-40~+105		°C
Storage temperature	T _{STG}	-65~+150		°C

Note1 : With PC board of glass epoxy. (The tab pin is not connected with PC board.)
PC board size of 110×40×0.8mm

Recommended Operating Conditions

Item	Symbol	Ratings	Units
Operating temperature	T _{OPR}	-40~+105	°C
Supply voltage	V _{DD}	+0.70~+10.0	V

Model Name



a		b		c		d		e	
Output Type		Delay Pin		VDET Rank		Package		Packing Specifications	
1	Push Pull	A	No	080	V _{TH} =0.80V	R	SSON-4B	R	R HOUSING Halogen-contained Product
2	Open Drain			ι	ι	U	SC-82ABB	L	L HOUSING Halogen-contained Product
				600	V _{TH} =6.00V	N	SOT-25A	M	R HOUSING Halogen-free Product
								H	L HOUSING Halogen-free Product

note1 : This device is tested at Ta=25°C, over temperature limits guaranteed by design only.

• Any products mentioned in this catalog are subject to any modification in their appearance and others for improvements without prior notification.
• The details listed here are not a guarantee of the individual products at the time of ordering. When using the products, you will be asked to check their specifications.

Electrical Characteristics

(Except where noted otherwise Ta=25°C)

Item	Symbol	Measurement conditions	Rank	Min.	Typ.	Max.	Units	Circuit
Reset threshold	V _{TH}	VDD=V _{TH} +1V Ta=+25°C Ta=-40~+85°C	0.8V	0.7936	0.8000	0.8064	V	2
				0.7800		0.8200		
			0.9V	0.8928	0.9000	0.9072		
				0.8775		0.9225		
			1.0V	0.9920	1.0000	1.0080		
				0.9750		1.0250		
			1.1V	1.0912	1.1000	1.1088		
				1.0725		1.1275		
			1.2V	1.1904	1.2000	1.2096		
				1.1700		1.2300		
			1.3V	1.2896	1.3000	1.3104		
				1.2675		1.3325		
			1.4V	1.3888	1.4000	1.4112		
				1.3650		1.4350		
			1.5V	1.4880	1.5000	1.5120		
				1.4625		1.5375		
			1.6V	1.5872	1.6000	1.6128		
				1.5600		1.6400		
			1.7V	1.6864	1.7000	1.7136		
				1.6575		1.7425		
			1.8V	1.7856	1.8000	1.8144		
				1.7550		1.8450		
			1.9V	1.8848	1.9000	1.9152		
				1.8525		1.9475		
			2.0V	1.9900	2.0000	2.0100		
				1.9500		2.0500		
			2.1V	2.0895	2.1000	2.1105		
				2.0475		2.1525		
			2.2V	2.1890	2.2000	2.2110		
				2.1450		2.2550		
			2.3V	2.2885	2.3000	2.3115		
				2.2425		2.3575		
			2.4V	2.3880	2.4000	2.4120		
				2.3400		2.4600		
			2.5V	2.4875	2.5000	2.5125		
				2.4375		2.5625		
			2.6V	2.5870	2.6000	2.6130		
				2.5350		2.6650		
			2.7V	2.6865	2.7000	2.7135		
				2.6325		2.7675		
			2.8V	2.7860	2.8000	2.8140		
				2.7300		2.8700		
			2.9V	2.8855	2.9000	2.9145		
				2.8275		2.9725		
			3.0V	2.9850	3.0000	3.0150		
				2.9250		3.0750		

Item	Symbol	Measurement conditions	Rank	Min.	Typ.	Max.	Units	Circuit
Reset threshold	V_{TH}	$VDD = V_{TH} + 1V$ $T_a = +25^{\circ}C$ $T_a = -40 \sim +85^{\circ}C$	3.1V	3.0845	3.1000	3.1155	V	2
				3.0225		3.1775		
			3.2V	3.1840	3.2000	3.2160		
				3.1200		3.2800		
			3.3V	3.2835	3.3000	3.3165		
				3.2175		3.3825		
			3.4V	3.3830	3.4000	3.4170		
				3.3150		3.4850		
			3.5V	3.4825	3.5000	3.5175		
				3.4125		3.5875		
			3.6V	3.5820	3.6000	3.6180		
				3.5100		3.6900		
			3.7V	3.6815	3.7000	3.7185		
				3.6075		3.7925		
			3.8V	3.7810	3.8000	3.8190		
				3.7050		3.8950		
			3.9V	3.8805	3.9000	3.9195		
				3.8025		3.9975		
			4.0V	3.9800	4.0000	4.0200		
				3.9000		4.1000		
			4.1V	4.0795	4.1000	4.1205		
				3.9975		4.2025		
			4.2V	4.1790	4.2000	4.2210		
				4.0950		4.3050		
			4.3V	4.2785	4.3000	4.3215		
				4.1925		4.4075		
			4.4V	4.3780	4.4000	4.4220		
				4.2900		4.5100		
			4.5V	4.4775	4.5000	4.5225		
				4.3875		4.6125		
			4.6V	4.5770	4.6000	4.6230		
				4.4850		4.7150		
			4.7V	4.6765	4.7000	4.7235		
				4.5825		4.8175		
			4.8V	4.7760	4.8000	4.8240		
				4.6800		4.9200		
			4.9V	4.8755	4.9000	4.9245		
				4.7775		5.0225		
			5.0V	4.9750	5.0000	5.0250		
				4.8750		5.1250		
			5.1V	5.0745	5.1000	5.1255		
				4.9725		5.2275		
			5.2V	5.1740	5.2000	5.2260		
				5.0700		5.3300		
			5.3V	5.2735	5.3000	5.3265		
				5.1675		5.4325		
			5.4V	5.3730	5.4000	5.4270		
				5.2650		5.5350		
			5.5V	5.4725	5.5000	5.5275		
				5.3625		5.6375		
			5.6V	5.5720	5.6000	5.6280		
				5.4600		5.7400		

Item	Symbol	Measurement conditions	Rank	Min.	Typ.	Max.	Units	Circuit
Reset threshold	V_{TH}	$V_{DD}=V_{TH}+1V$ $T_a=+25^{\circ}C$ $T_a=-40\sim+85^{\circ}C$	5.7V	5.6715	5.7000	5.7285	V	2
				5.5575		5.8425		
			5.8V	5.7710	5.8000	5.8290		
				5.6550		5.9450		
			5.9V	5.8705	5.9000	5.9295		
				5.7525		6.0475		
Reset threshold hysteresis	ΔV_{TH}	$V_{DD}=V_{TH}+1V$ $V_S=0V \rightarrow V_{TH}+1V \rightarrow 0V$	6.0V	5.9700	6.0000	6.0300		
				5.8500		6.1500		
			0.8V	0.024	0.040	0.064		
			0.9V	0.027	0.045	0.072		
			1.0V	0.030	0.050	0.080		
			1.1V	0.033	0.055	0.088		
			1.2V	0.036	0.060	0.096		
			1.3V	0.039	0.065	0.104		
			1.4V	0.042	0.070	0.112		
			1.5V	0.045	0.075	0.120		
			1.6V	0.048	0.080	0.128		
			1.7V	0.051	0.085	0.136		
			1.8V	0.054	0.090	0.144		
			1.9V	0.057	0.095	0.152		
			2.0V	0.060	0.100	0.160		
			2.1V	0.063	0.105	0.168		
			2.2V	0.066	0.110	0.176		
			2.3V	0.069	0.115	0.184		
			2.4V	0.072	0.120	0.192		
			2.5V	0.075	0.125	0.200		
			2.6V	0.078	0.130	0.208		
			2.7V	0.081	0.135	0.216		
			2.8V	0.084	0.140	0.224		
			2.9V	0.087	0.145	0.232		
			3.0V	0.090	0.150	0.240		
			3.1V	0.093	0.155	0.248		
			3.2V	0.096	0.160	0.256		
			3.3V	0.099	0.165	0.264		
			3.4V	0.102	0.170	0.272		
			3.5V	0.105	0.175	0.280		
			3.6V	0.108	0.180	0.288		
			3.7V	0.111	0.185	0.296		
			3.8V	0.114	0.190	0.304		
			3.9V	0.117	0.195	0.312		
			4.0V	0.120	0.200	0.320		
			4.1V	0.123	0.205	0.328		
			4.2V	0.126	0.210	0.336		
			4.3V	0.129	0.215	0.344		
			4.4V	0.132	0.220	0.352		
			4.5V	0.135	0.225	0.360		
			4.6V	0.138	0.230	0.368		
			4.7V	0.141	0.235	0.376		
			4.8V	0.144	0.240	0.384		
			4.9V	0.147	0.245	0.392		
			5.0V	0.150	0.250	0.400		


Item	Symbol	Measurement conditions	Rank	Min.	Typ.	Max.	Units	Circuit
Reset threshold hysteresis	ΔV_{TH}	VDD=V _{TH} +1V VS=0V→V _{TH} +1V→0V	5.1V	0.153	0.255	0.408	V	2
			5.2V	0.156	0.260	0.416		
			5.3V	0.159	0.265	0.424		
			5.4V	0.162	0.270	0.432		
			5.5V	0.165	0.275	0.440		
			5.6V	0.168	0.280	0.448		
			5.7V	0.171	0.285	0.456		
			5.8V	0.174	0.290	0.464		
			5.9V	0.177	0.295	0.472		
			6.0V	0.180	0.300	0.480		
Supply current	I _{DD}	VDD=V _{TH} +1V VS=V _{TH} +1V	0.8V ~ 6.0V		0.35	1.0	μA	1
Reset threshold temp. coefficient	$\Delta V_{TH}/^{\circ}\text{C}$ (Note3)	Ta=-40~+85°C	0.8V ~ 6.0V		±100		ppm/°C	2
"L" Transfer delay time	t _{PHL} (Note3)	VDD=V _{TH} +0.4V VS=V _{TH} +0.4V→V _{TH} -0.4V (Note3)	0.8V ~ 6.0V	2	15	100	μs	5
"H" Transfer delay time	t _{PLH} (Note3)	VDD=V _{TH} +0.4V VS=V _{TH} -0.4V→V _{TH} +0.4V (Note3)	0.8V ~ 6.0V	2	15	100	μs	5
VS Input current	I _{VS}	VDD=V _{TH} +1V VS=V _{TH} +1V	0.8V ~ 6.0V		100		nA	4
"L" Output current	I _{OL1}	VDD=VS=0.7V, VDS=0.05V	0.8V ~ 6.0V	0.01	0.10		mA	3
	I _{OL2}	VDD=VS=1.2V, VDS=0.5V V _{TH} ≥1.3V	1.3V ~ 6.0V	0.23	2.00			
	I _{OL3}	VDD=VS=2.4V, VDS=0.5V V _{TH} ≥2.5V	2.5V ~ 6.0V	1.60	8.00			
	I _{OL4}	VDD=VS=3.6V, VDS=0.5V V _{TH} ≥3.7V	3.7V ~ 6.0V	3.20	12.0			
"H" Output current	I _{OH1}	VDD=VS=4.8V, VDS=0.5V V _{TH} ≤4.7V	0.8V ~ 4.7V	0.36	0.62		mA	3
	I _{OH2}	VDD=VS=6.5V, VDS=0.5V	0.8V ~ 6.0V	0.46	0.75			

Note2 : This device is tested at Ta=25°C, over temperature limits guaranteed by design only.


Note3 : The parameter is guaranteed by design.

Test Circuit


(1)

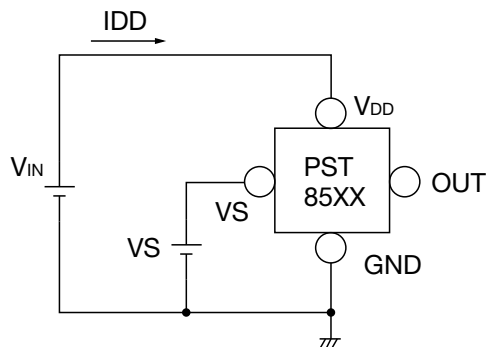


(2-1) PST851

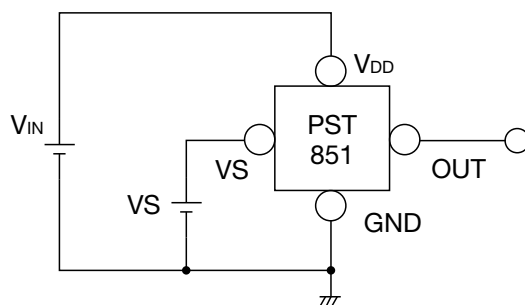


(2-2) PST852

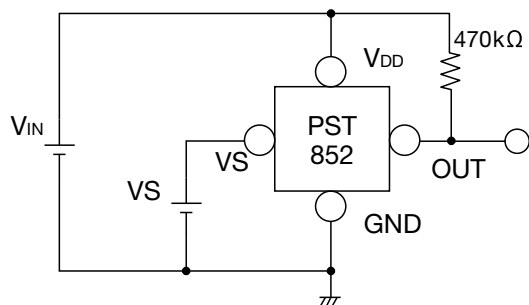


(3)

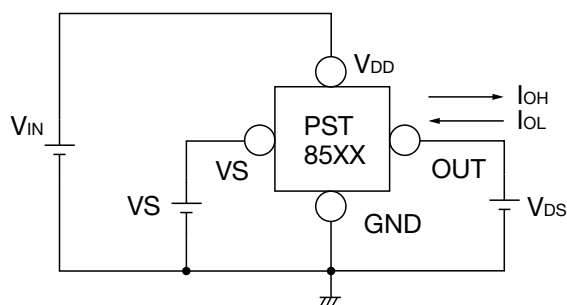



(4)

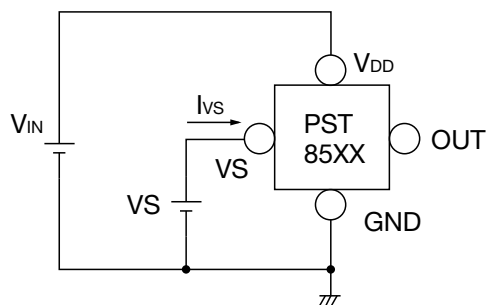

(5-1) PST851

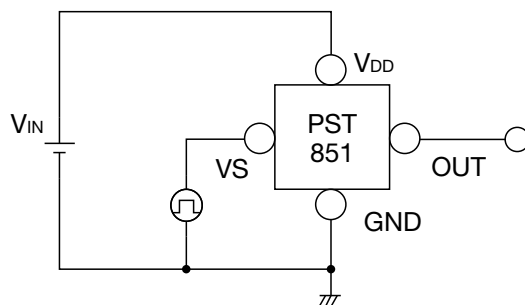


(5-2) PST852

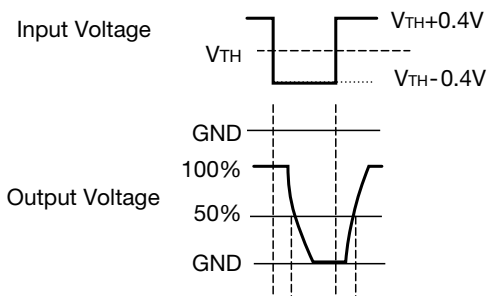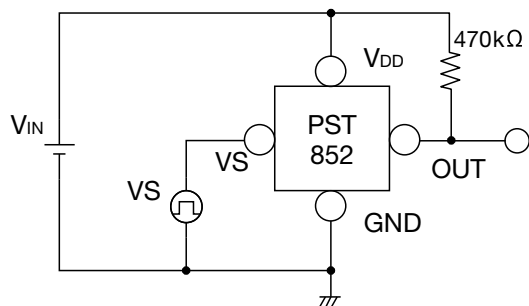


Timing Chart

- The operation of the PST85XX OUT terminal when $V_{DD} < 0.7\text{ V}$ or less is indefinite, however in the timing chart, OUT terminal NMOS is listed as OFF and PMOS as ON for PST851. The OUT terminal NMOS is listed as OFF for PST852.

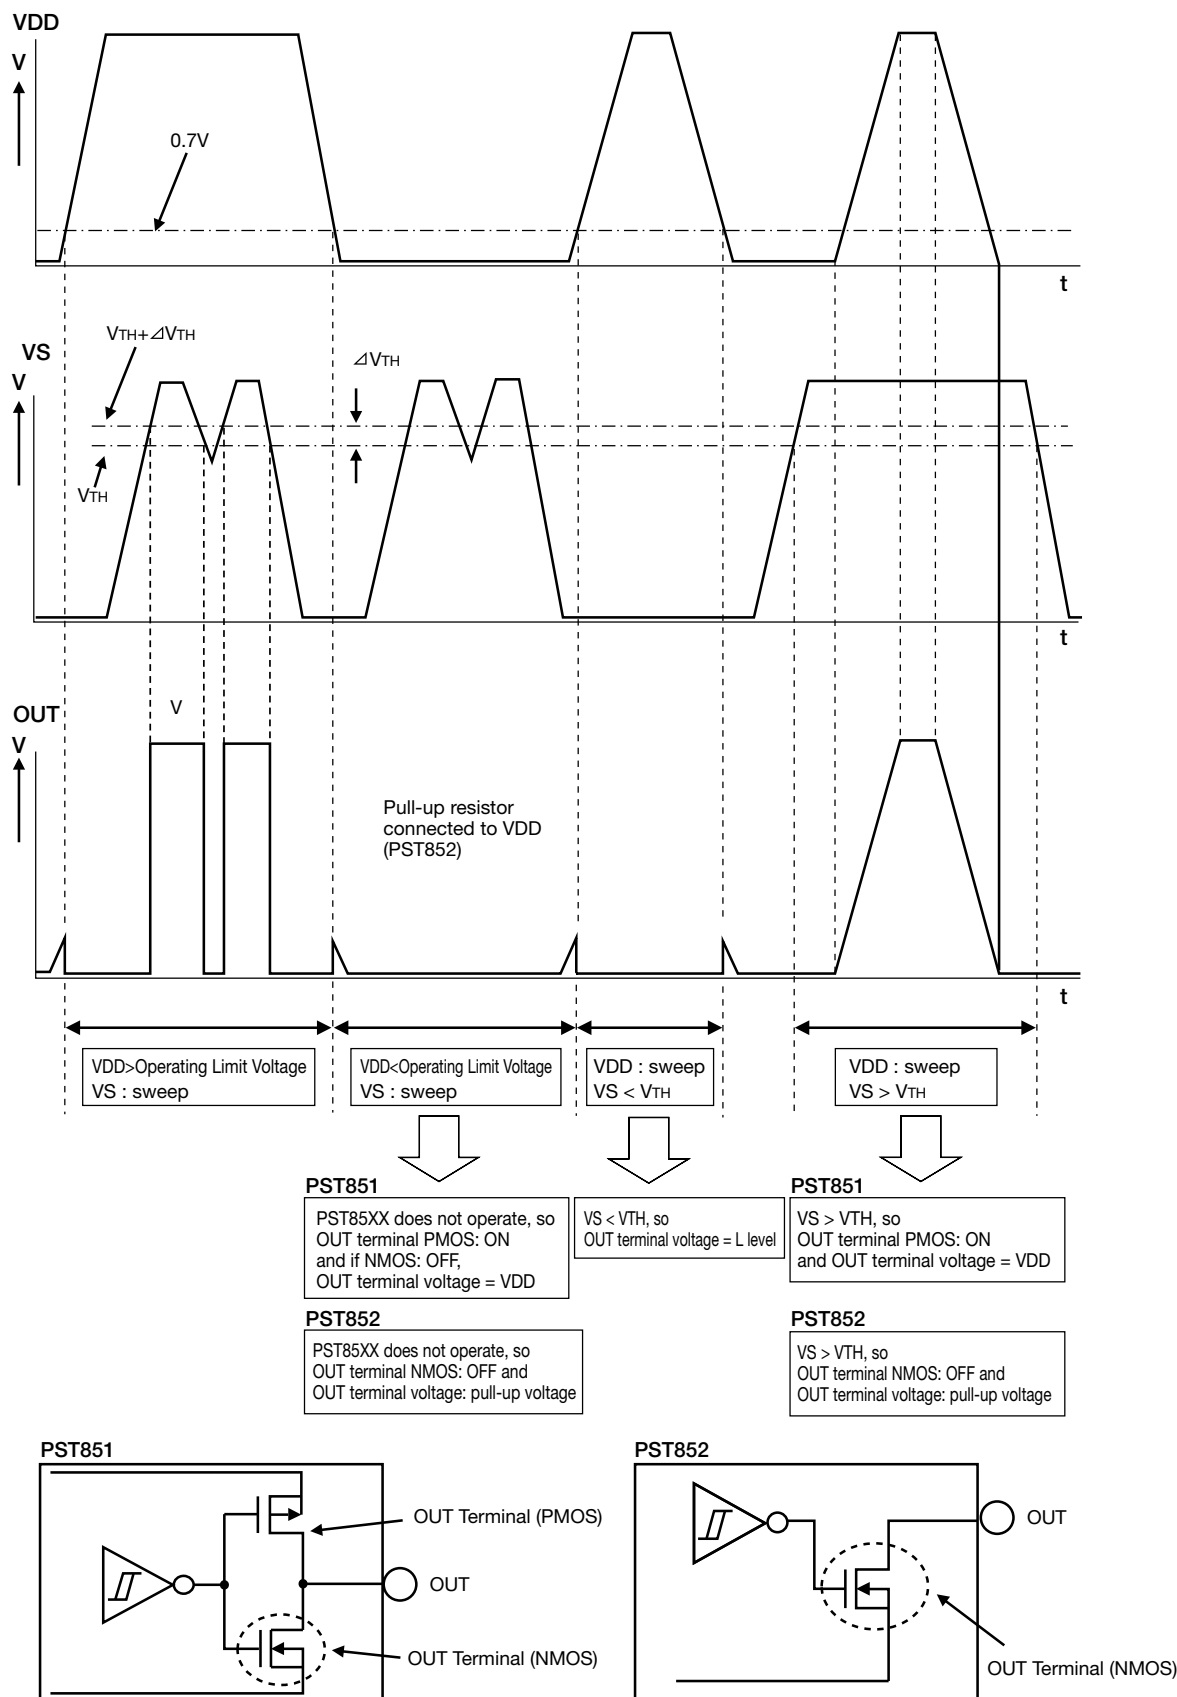


Application Circuits

PST851

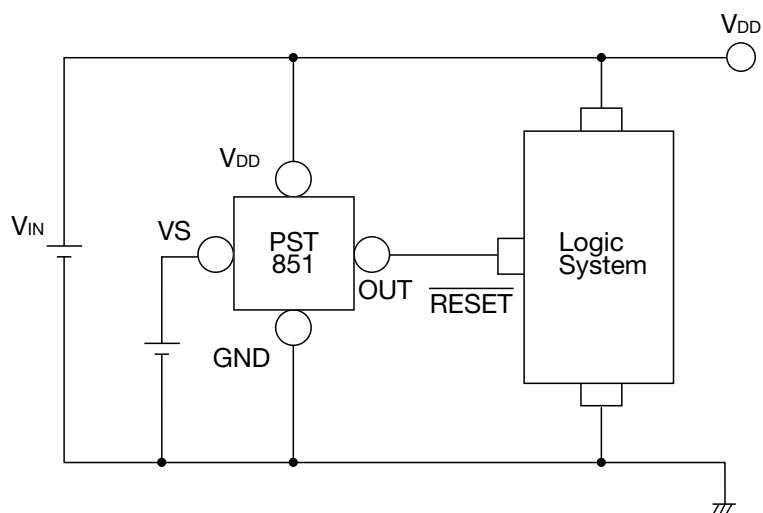


PST852

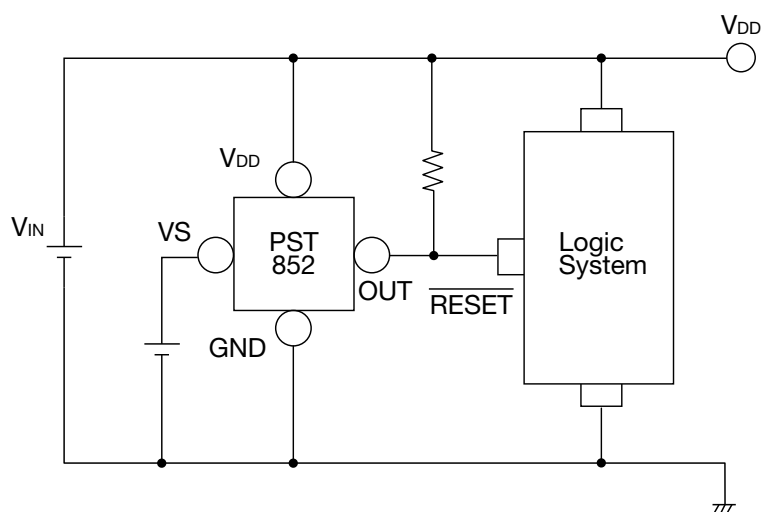


- We shall not be liable for any trouble or damage caused by using this circuit.
- In the event a problem which may affect industrial property or any other rights of us or a third party is encountered during the use of information described in these circuit, Mitsumi Electric Co., Ltd. shall not be liable for any such problem, nor grant a license therefore.

Characteristics (Typical Performance Characteristics 0.85V)


Detecting Voltage

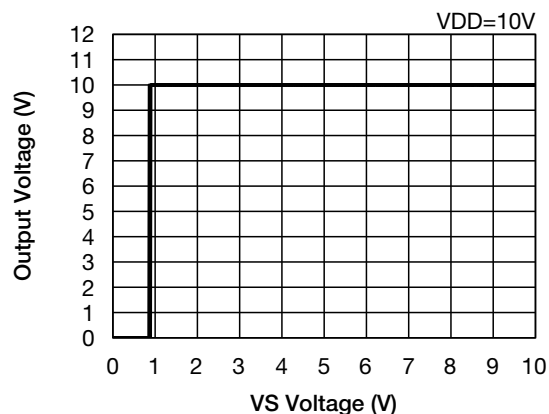


Supply Current

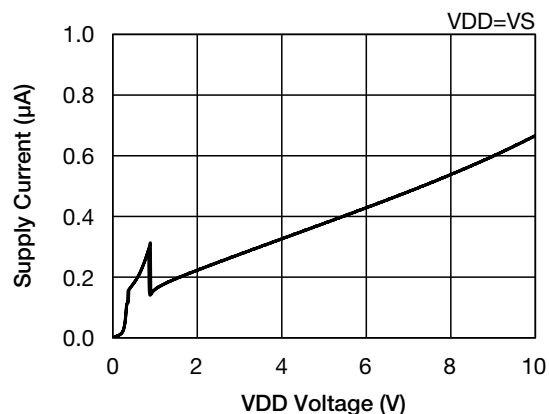


N-ch Output Current

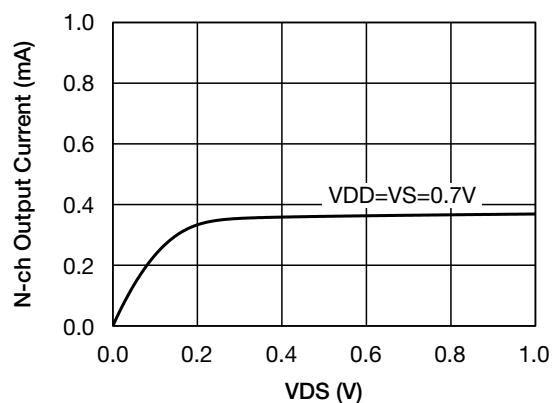

Detecting Voltage

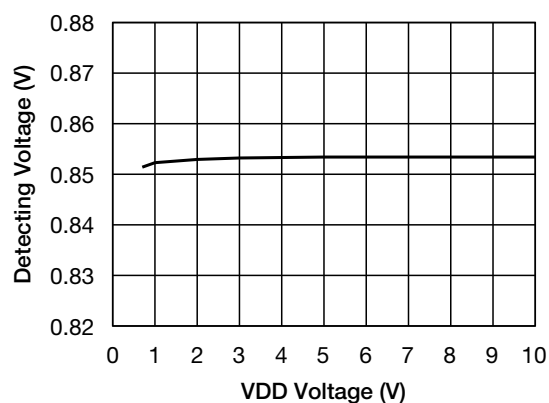


VS Input Current - VS Voltage

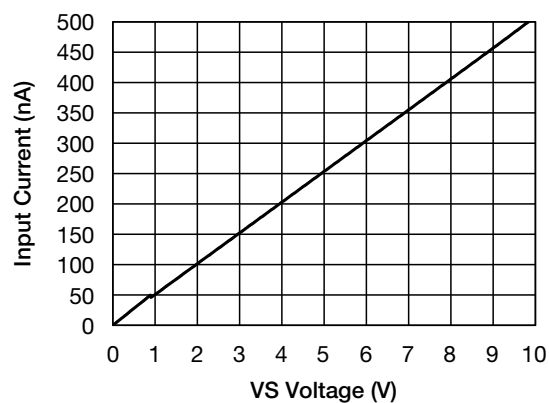


Note : ★ These are typical characteristics.


■ Detecting Voltage - Temperature

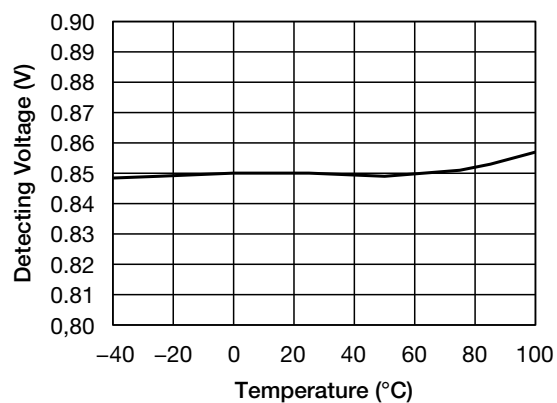

■ Hysteresis Voltage - Temperature

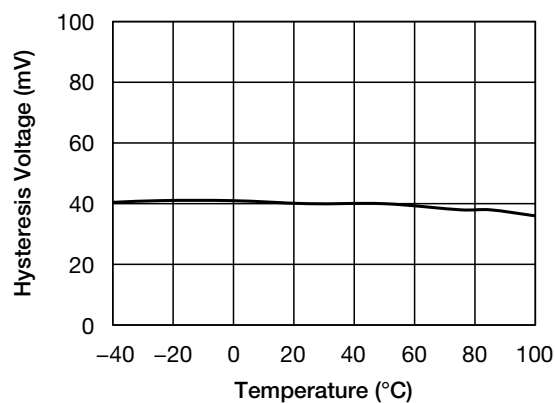

■ "L"Output Current 1 - Temperature

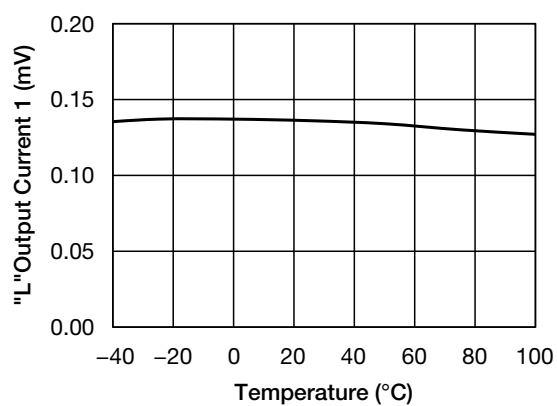

Note : ★ These are typical characteristics.