


POSITIONING PSTC441 - Power Thyristor

1000 - 2000 V_{DRM} ; 1175 A rms

HIGH POWER THYRISTOR FOR PHASE CONTROL APPLICATIONS

Features:

- . All Diffused Structure
- . Center Amplifying Gate Configuration
- . Blocking capability up to 2000 volts
- . Guaranteed Maximum Turn-Off Time
- . High dV/dt Capability
- . Pressure Assembled Device

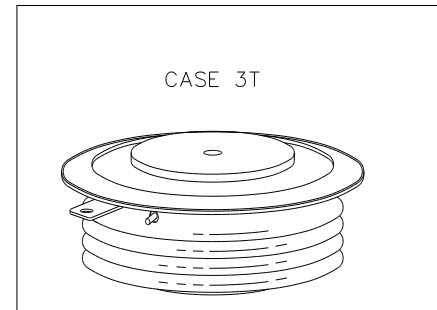

ELECTRICAL CHARACTERISTICS AND RATINGS

Blocking - Off State

Device Type	V_{RRM} (1)	V_{DRM} (1)	V_{RSM} (1)
PSTC441P	1000	1000	1100
PSTC441PA	1100	1100	1200
PSTC441PB	1200	1200	1300
PSTC441PD	1400	1400	1500
PSTC441PM	1600	1600	1700
PSTC441PN	1800	1800	1900
PSTC441L	2000	2000	2100

V_{RRM} = Repetitive peak reverse voltage

V_{DRM} = Repetitive peak off state voltage

V_{RSM} = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage and off state leakage	I_{RRM} / I_{DRM}	15 mA 35 mA (3)
Critical rate of voltage rise (4)	dV/dt	200 V/ μ sec

Notes:

All ratings are specified for $T_j = 25^\circ\text{C}$ unless otherwise stated.

(1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range -40 to $+125^\circ\text{C}$.

(2) 10 msec. max. pulse width

(3) Maximum value for $T_j = 125^\circ\text{C}$.

(4) Minimum value for linear and exponential waveshape to 80% rated V_{DRM} . Gate open. $T_j = 125^\circ\text{C}$.

(5) Non-repetitive value.

(6) The value of di/dt is established in accordance with EIA/NIMA Standard RS-397, Section 5-2-2-6. The value defined would be in addition to that obtained from a snubber circuit, comprising a $0.2 \mu\text{F}$ capacitor and 20 ohms resistance in parallel with the thyristor under test.

Conducting - on state

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average value of on-state current	$I_{T(AV)}$		750		A	Sinewave, 180° conduction, $T_c = 67^\circ\text{C}$
RMS value of on-state current	I_{TRMS}		1175		A	Nominal value
Peak one cPSTCLe surge (non repetitive) current	I_{TSM}		11000 10000		A A	8.3 msec (60Hz), sinusoidal wave-shape, 180° conduction, $T_j = 125^\circ\text{C}$ 10.0 msec (50Hz), sinusoidal wave-shape, 180° conduction, $T_j = 125^\circ\text{C}$
I square t	I^2t		500000		A^2s	8.3 msec and 10.0 msec
Latching current	I_L		800		mA	$V_D = 24 \text{ V}$; $R_L = 12 \text{ ohms}$
Holding current	I_H		400		mA	$V_D = 24 \text{ V}$; $I = 2.5 \text{ A}$
Peak on-state voltage	V_{TM}		1.80		V	$I_{TM} = 2200\text{A}$; Duty cPSTCLe $\leq 0.01\%$
Critical rate of rise of on-state current (5, 6)	di/dt		400		A/ μ s	Switching from $V_{DRM} \leq 1000 \text{ V}$, non-repetitive
Critical rate of rise of on-state current (6)	di/dt		150		A/ μ s	Switching from $V_{DRM} \leq 1000 \text{ V}$

ELECTRICAL CHARACTERISTICS AND RATINGS (cont'd)

Thyristor

PSTC441- Power

Gating

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Peak gate power dissipation	P_{GM}		200		W	$t_p = 40 \mu s$
Average gate power dissipation	$P_{G(AV)}$		5		W	
Peak gate current	I_{GM}		10		A	
Gate current required to trigger all units	I_{GT}		300 150 125		mA mA mA	$V_D = 6 V; R_L = 3 \text{ ohms}; T_j = -40^\circ C$ $V_D = 6 V; R_L = 3 \text{ ohms}; T_j = +25^\circ C$ $V_D = 6 V; R_L = 3 \text{ ohms}; T_j = +125^\circ C$
Gate voltage required to trigger all units	V_{GT}	0.15	5 3		V V V	$V_D = 6 V; R_L = 3 \text{ ohms}; T_j = -40^\circ C$ $V_D = 6 V; R_L = 3 \text{ ohms}; T_j = 0-125^\circ C$ $V_D = \text{Rated } V_{DRM}; R_L = 1000 \text{ ohms}; T_j = +125^\circ C$
Peak negative voltage	V_{GRM}		5		V	

Dynamic

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Delay time	t_d		1.5	0.7	μs	$I_{TM} = 50 A; V_D = \text{Rated } V_{DRM}$ Gate pulse: $V_G = 20 V; R_G = 20 \text{ ohms}; t_r = 0.1 \mu s; t_p = 20 \mu s$
Turn-off time (with $V_R = -50 V$)	t_q		200	125	μs	$I_{TM} = 500 A; di/dt = 25 A/\mu s;$ $V_R \geq -50 V; \text{Re-applied } dV/dt = 20 V/\mu s \text{ linear to } 80\% V_{DRM}; V_G = 0;$ $T_j = 125^\circ C; \text{Duty cPSTC} \leq 0.01\%$
Reverse recovery charge	Q_{rr}		*		μC	$I_{TM} = 500 A; di/dt = 25 A/\mu s;$ $V_R \geq -50 V$



* For guaranteed max. value, contact factory.

THERMAL AND MECHANICAL CHARACTERISTICS AND RATINGS

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Operating temperature	T_j	-40	+125		$^\circ C$	
Storage temperature	T_{stg}	-40	+150		$^\circ C$	
Thermal resistance - junction to case	$R_{\theta(j-c)}$		0.040 0.080		$^\circ C/W$	Double sided cooled Single sided cooled
Thermal resistance - case to sink	$R_{\theta(c-s)}$		0.015 0.030		$^\circ C/W$	Double sided cooled * Single sided cooled *
Mounting force	P	3000 13.3	3500 15.5		lb. kN	
Weight	W			9 225	oz. g	



* Mounting surfaces smooth, flat and greased

Note : for case outline and dimensions, see case outline drawing in page 4 of this Technical Data

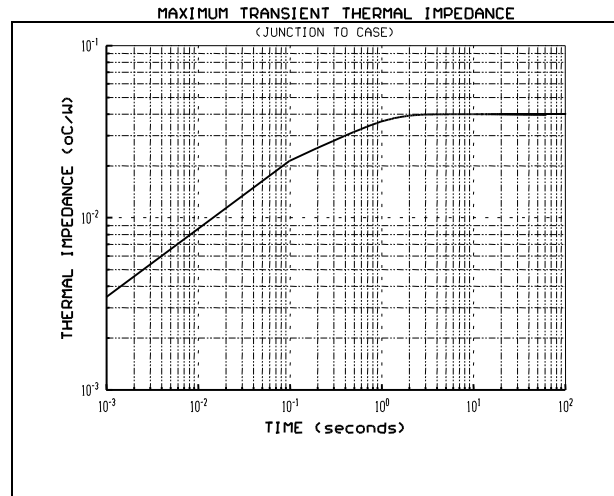
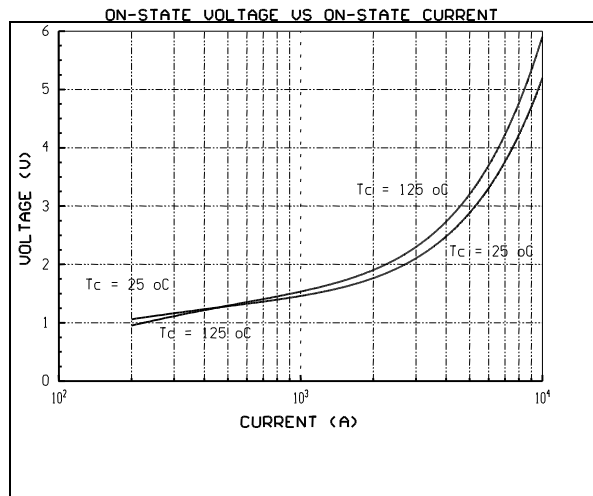


ELECTRICAL CHARACTERISTICS AND RATINGS (cont'd)

PSTC441- Power

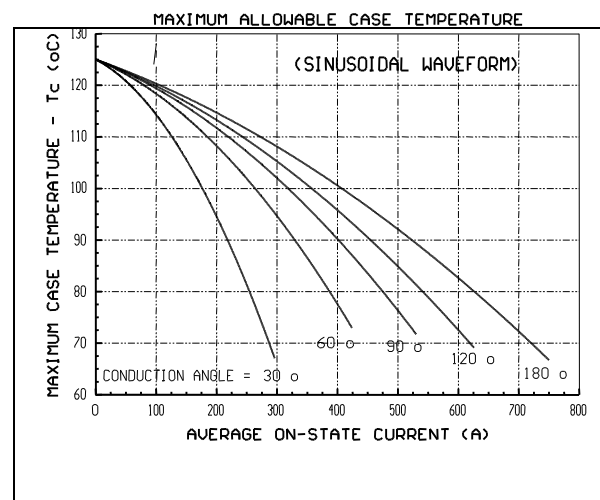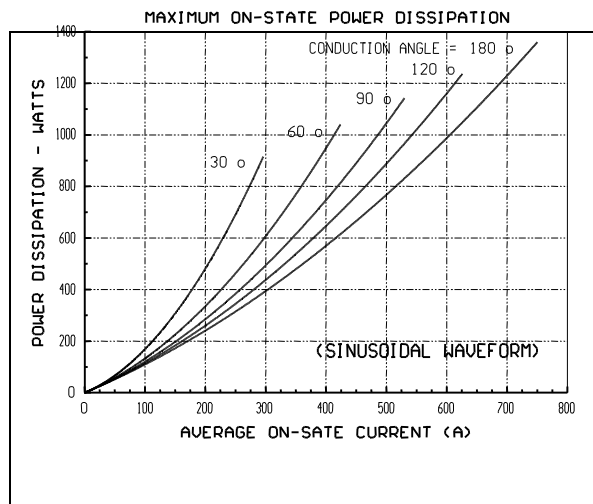

Thyristor

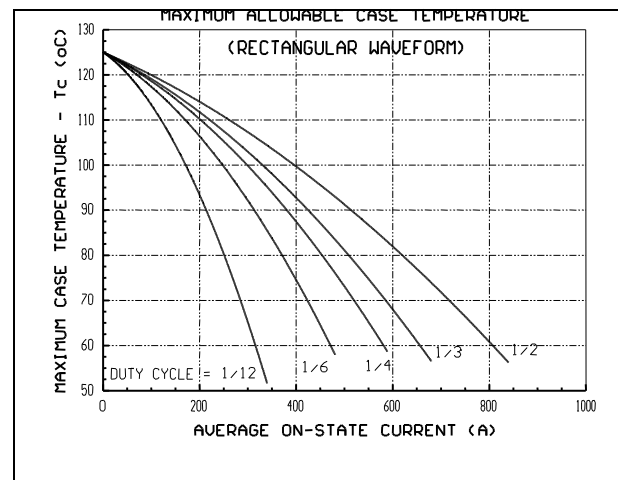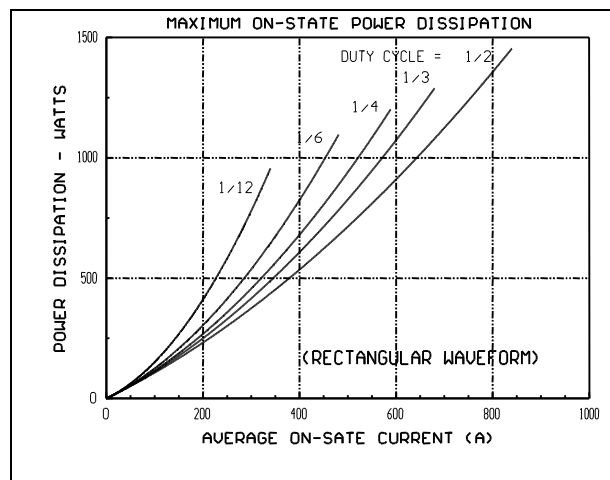


Technical Data : CD-025

Page 4 of 4

CASE OUTLINE AND DIMENSIONS.
Thyristor

PSTC441- Power

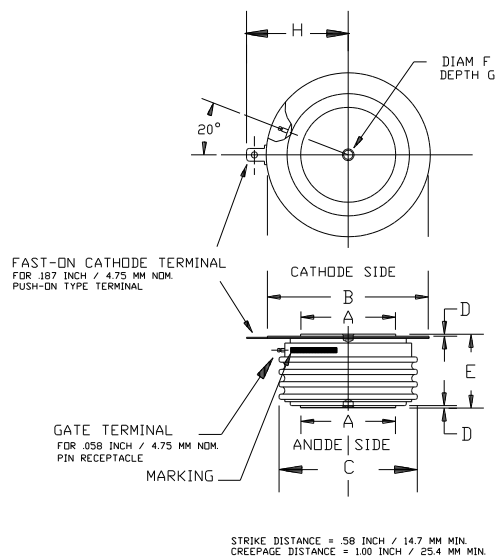

OUTLINE DIMENSIONS - CASE 3T				
DIMENSIONS	Min. mm	Max. mm	Min. In.	Max. In.
DIAM A	33.02	34.29	1.30	1.35
DIAM B	55.88	63.50	2.20	2.50
DIAM C	--	54.61	--	2.15
D	0.76	--	0.03	--
E	25.40	27.18	1.00	1.07
F	3.30	3.81	0.13	0.15
G	1.78	2.03	0.07	0.08
H	--	36.32	--	1.43

OUTLINE CONFORMS TO JEDEC TO-200AC

Add:Room303 Weiheng Building No.20 B Area Lanyuan Yangzhou Jiangsu P.R.C; Zip:225000
 Contact Person:John Chang; Tel:+86-514-7360558; Fax:+86-514-7782297;7367519
 E-mail:pst@pst888.com;positioning@china.com