


High Power RF LDMOS Field Effect Transistor 5 W, 28 V, 900 – 2700 MHz

Description

The PTFC270051M is an unmatched 5-watt LDMOS FET suitable for power amplifier applications with frequencies from 900 MHz to 2700 MHz. This LDMOS transistor offers excellent gain, efficiency and linearity performance in a small overmolded plastic package.

PTFC270051M
Package PG-SON-10

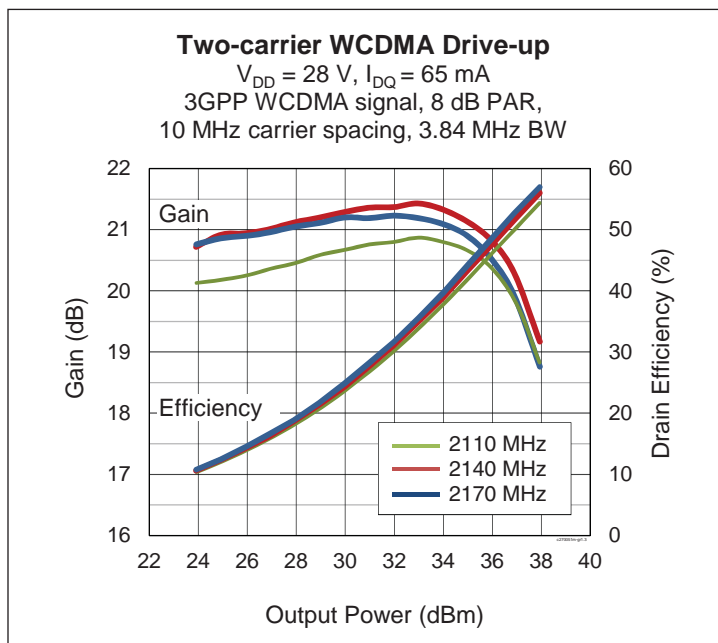

Features

- Unmatched
- Typical CW performance, 940 MHz, 28 V
 - Output power (P_{1dB}) = 6.5 W
 - Gain = 23 dB
 - Efficiency = 62%
- Typical CW performance, 2170 MHz, 28 V
 - Output power (P_{1dB}) = 7.3 W
 - Gain = 20.3 dB
 - Efficiency = 60%
- Typical CW performance, 2655 MHz, 28 V
 - Output power (P_{1dB}) = 7.3 W
 - Gain = 19.9 dB
 - Efficiency = 59.5%
- Capable of handling 10:1 VSWR @ 28 V, 5 W (CW) output power
- Integrated ESD protection: Human Body Model Class 1A (per JESD22-A114)
- Pb-free and RoHS compliant

RF Characteristics, 2170 MHz

CW Specifications (tested in Infineon test fixture)

$V_{DD} = 28\text{ V}$, $I_{DQ} = 65\text{ mA}$, $P_{OUT} = 5\text{ W}$, $f_1 = 2110\text{ MHz}$, $f_2 = 2170\text{ MHz}$

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	18.5	19.5	—	dB

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$, $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current	$V_{DS} = 60\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	1	μA
Gate Leakage Current	$V_{GS} = 10\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	—	—	1	μA
On-State Resistance	$V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	2	—	Ω
Operating Gate Voltage	$V_{DS} = 28\text{ V}$, $I_{DQ} = 65\text{ mA}$	V_{GS}	2.2	2.7	3.2	V

Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	65	V
Gate-Source Voltage	V_{GS}	-6 to +10	V
Operating Voltage	V_{DD}	0 to +32	V
Junction Temperature	T_J	225	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance ($T_{CASE} 70^{\circ}\text{C}$, 5.5 W CW)	$R_{\theta JC}$	3.84	$^{\circ}\text{C}/\text{W}$

Moisture Sensitivity Level

Level	Test Standard	Package Temperature	Unit
3	IPC/JEDEC J-STD-020	260	$^{\circ}\text{C}$

Ordering Information

Type	Order Code	Package and Description	Shipping
PTFC270051M V2 R1K	PTFC270051MV2R1KXUMA1	PG-SON-10, molded plastic, SMD	Tape & Reel, 1000 pcs

Evaluation Boards

Order Code	Frequency	Description
LTN/PTFC270051M V2	2110 – 2170 MHz	Class AB with combined outputs, R04360, 0.508 mm thick
LTN/PTFC270051M E3	2620 – 2690 MHz	Class AB with combined outputs, R04360, 0.508 mm thick
LTN/PTFC270051M E4	920 – 960 MHz	Class AB with combined outputs, R04360, 0.508 mm thick
LTN/PTFC270051M E5	1930 – 1990 MHz	Class AB with combined outputs, R04360, 0.508 mm thick
LTN/PTFC270051M E6	1805 – 1880 MHz	Class AB with combined outputs, R04360, 0.508 mm thick

Find Gerber files for these reference fixtures on the Infineon Web site at www.infineon.com/rfpower



RF Characteristics, 2170 MHz

Two-carrier WCDMA Specifications (not subject to production test—verified by design/characterization in Infineon test fixture)





$V_{DD} = 28\text{ V}$, $I_{DQ} = 65\text{ mA}$, $P_{OUT} = 0.8\text{ W avg}$, $f_1 = 2157.5\text{ MHz}$, $f_2 = 2167.5\text{ MHz}$
 3GPP WCDMA signal, channel bandwidth = 3.84 MHz, peak/average = 8 dB @ 0.01% CCDF

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	—	21	—	dB
Drain Efficiency	η_D	—	21.5	—	%
Intermodulation Distortion	IMD	—	-35.5	—	dBc


Typical Performance, 2170 MHz (data taken in a production test fixture)

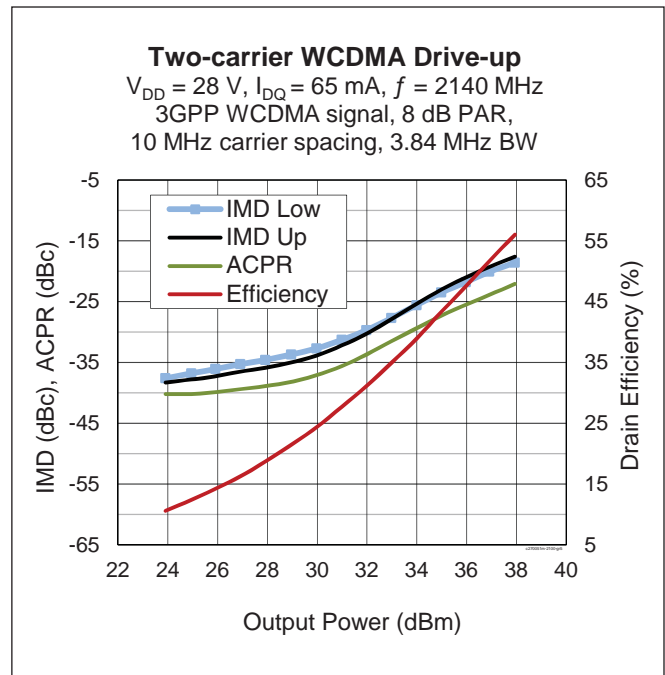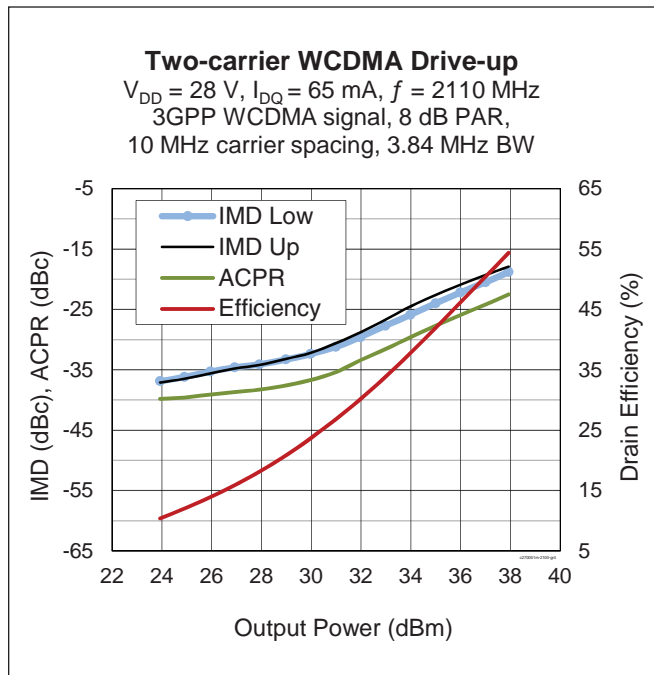

Typical Performance, 2170 MHz (cont.)

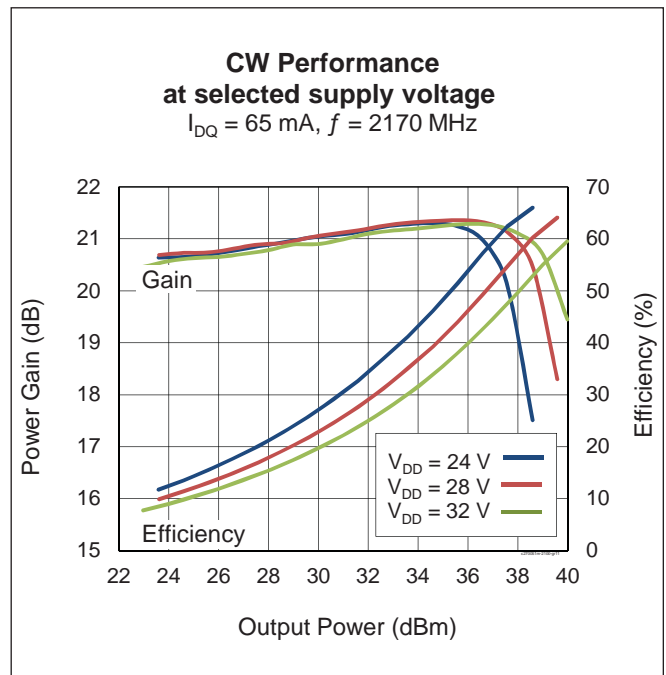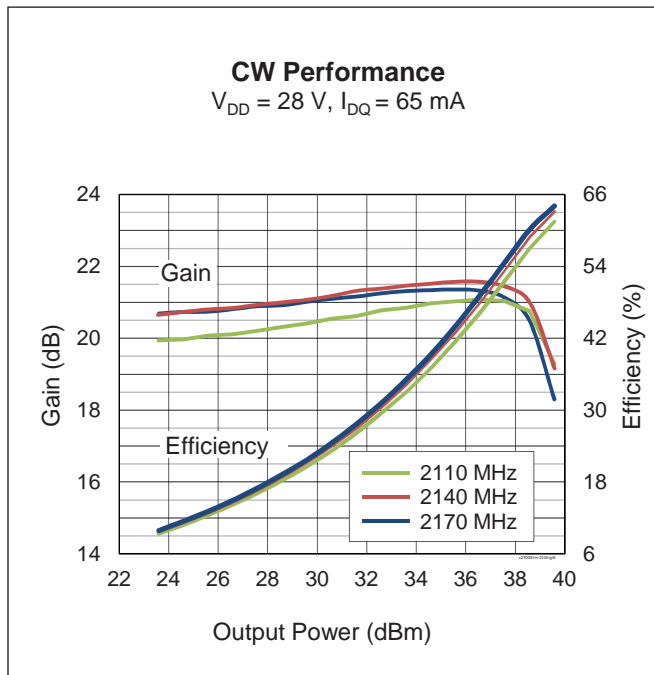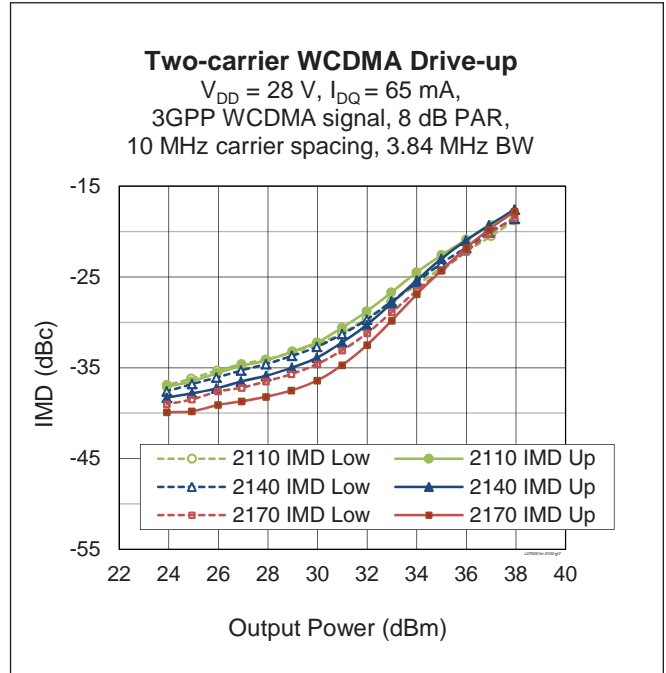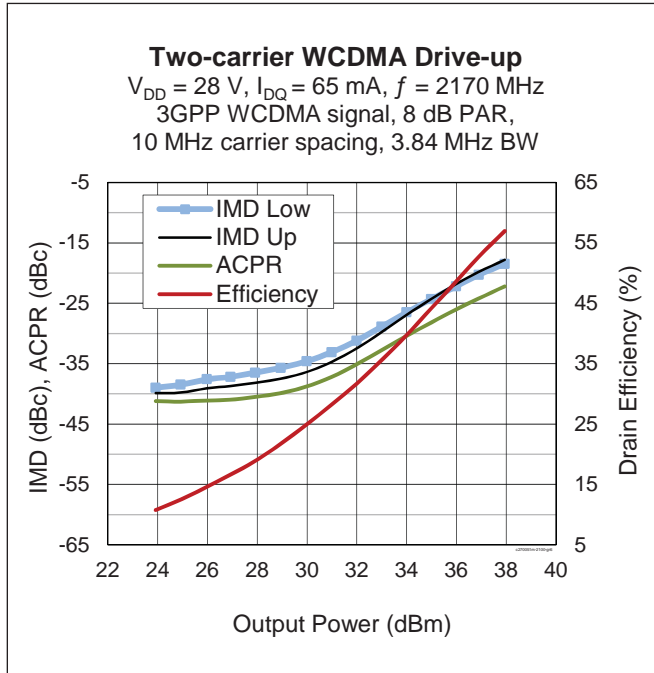


Typical Performance, 2170 MHz (cont.)

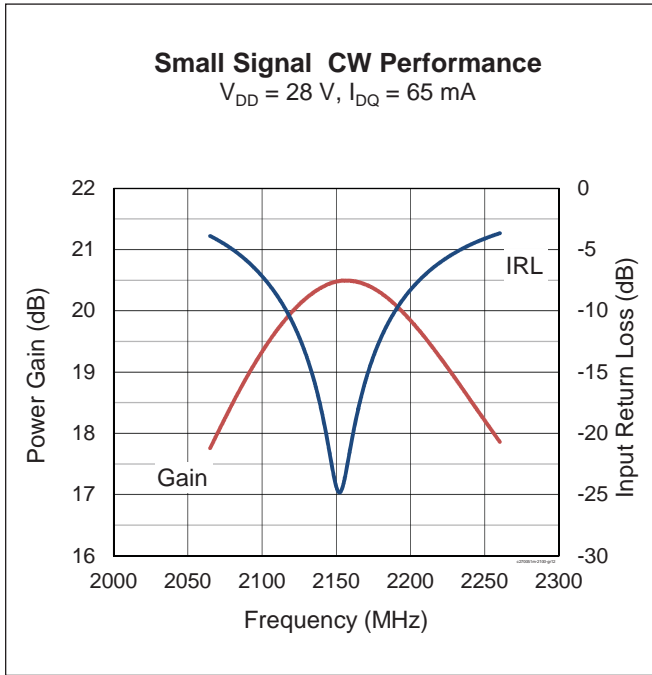

Broadband Circuit Impedance, 2170 MHz

Freq [MHz]	Z Source Ω		Z Load Ω	
	R	jX	R	jX
2110	1.5	-2.6	9.5	5.4
2140	1.5	-2.7	8.7	5.5
2170	1.5	-2.9	7.7	5.6

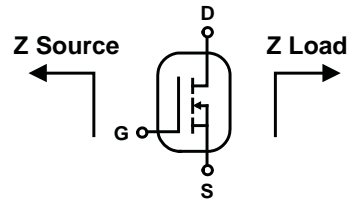


Load Pull Performance

Pulsed CW signal: 160 μsec , 10% duty cycle; 28 V, 65 mA

Class AB		P_{1dB}									
		Max Output Power					Max PAE				
Freq [MHz]	Zs [Ω]	Zl [Ω]	Gain [dB]	PAE [%]	POUT [dBm]	POUT [W]	Zl [Ω]	Gain [dB]	PAE [%]	POUT [dBm]	POUT [W]
2110	1.5 - j2.6	10.6 + j2.6	20.6	55.0	39.50	8.9	8.3 + j8.2	22.5	64.9	38.50	7.1
2140	1.4 - j2.7	9.8 + j2.8	20.5	56.4	39.46	8.8	7.6 + j8.8	22.9	64.1	37.90	6.2
2170	1.4 - j2.9	9.2 + j2.8	20.7	56.2	39.20	8.3	6.2 + j8.3	23.0	63.8	37.40	5.5

Reference Circuit, 2170 MHz

DUT	PTFC270051M
Test Fixture Part No.	LTN/PTFC270051M V2
PCB	Rogers 4350, 0.508 mm [.020"] thick, 2 oz. copper, $\epsilon_r = 3.66$
Find Gerber files for this test fixture on the Infineon Web site at (http://www.infineon.com/rfpower)	

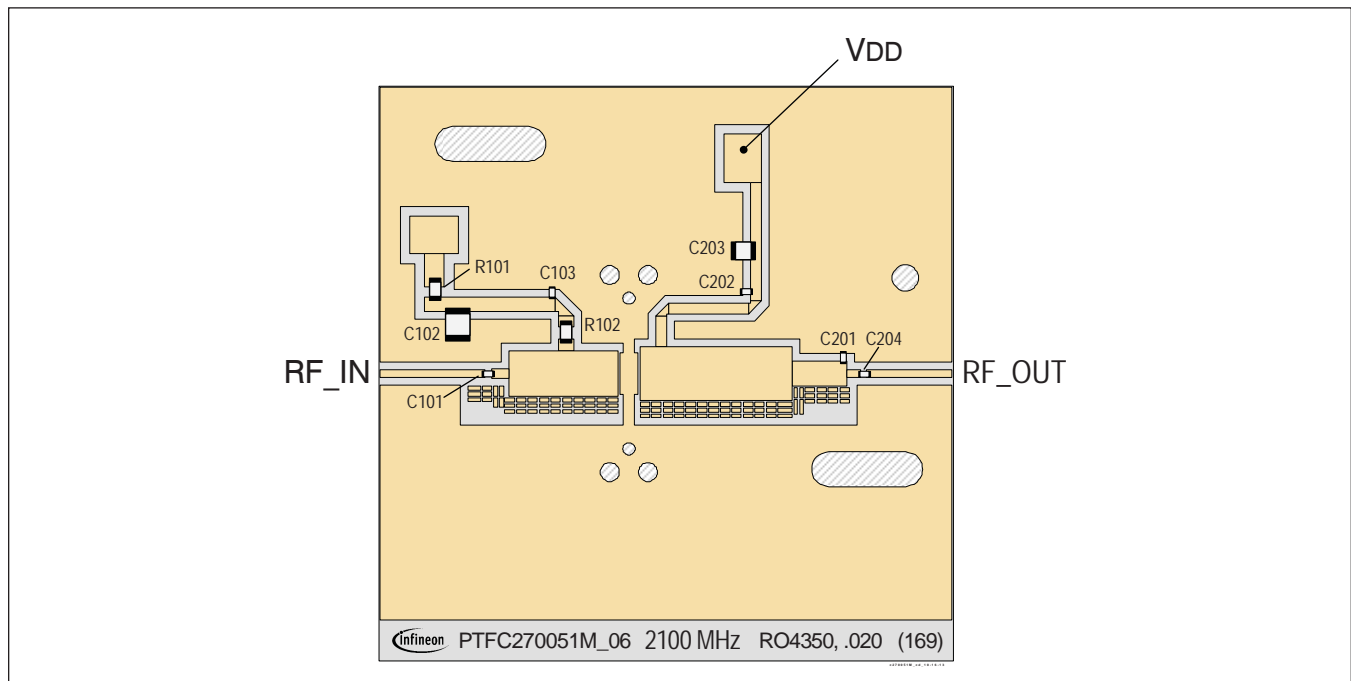

Production test circuit assembly diagram (not to scale)

Components Information

Component	Description	Supplier	P/N
C101	Chip capacitor, 1 pF	ATC	ATC600S1R0BI250X
C102	Chip capacitor, 2.2 μ F	TDK Corporation	C4532X7R1H225M160KA
C103	Chip capacitor, 12 pF	ATC	ATC600S120BT250X
C201	Chip capacitor, 1.1 pF	ATC	ATC600S1R1BT250X
C202	Chip capacitor, 12 pF	ATC	ATC600S120BT250X
C203	Capacitor, 10 μ F	Taiyo Yuden	UMK325C7106MM-T
C204	Chip capacitor, 12 pF	ATC	ATC600S120BT250X
R101, R102	Resistor, 10 Ω	Panasonic	ERJ-8GEYJ100V



RF Characteristics, 940 MHz

Two-carrier WCDMA Specifications (not subject to production test—verified by design/characterization in Infineon test fixture)





$V_{DD} = 28\text{ V}$, $I_{DQ} = 65\text{ mA}$, $P_{OUT} = 0.8\text{ W avg}$, $f_1 = 935\text{ MHz}$, $f_2 = 945\text{ MHz}$
 3GPP WCDMA signal, channel bandwidth = 3.84 MHz, peak/average = 8 dB @ 0.01% CCDF

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	—	24	—	dB
Drain Efficiency	η_D	—	20.7	—	%
Intermodulation Distortion	IMD	—	-42	—	dBc



Typical Performance, 940 MHz

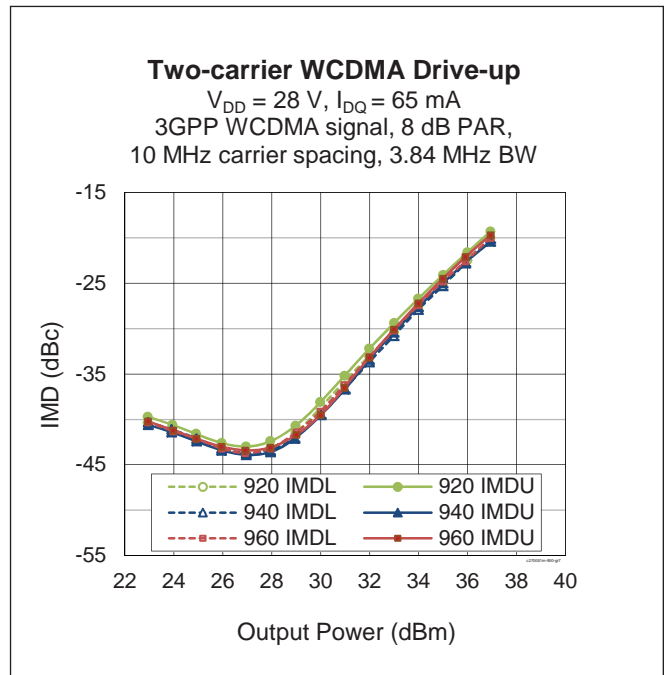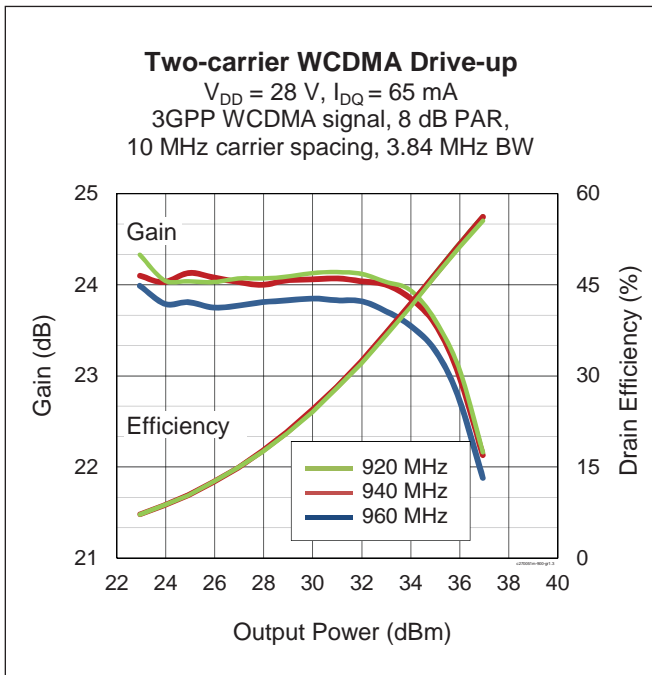

Reference Circuit, 940 MHz (cont.)

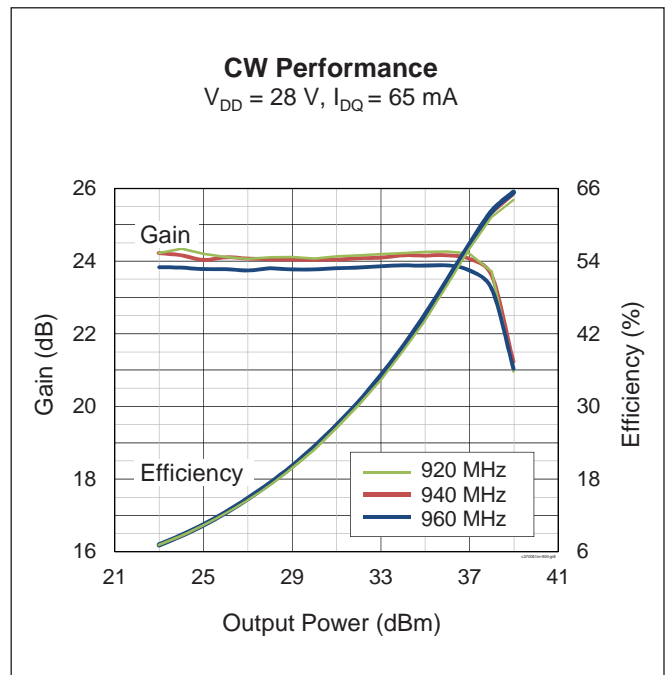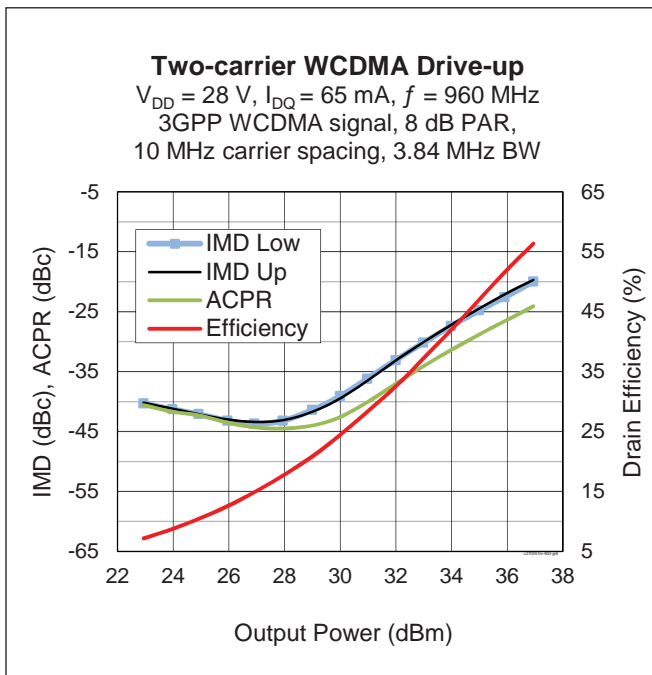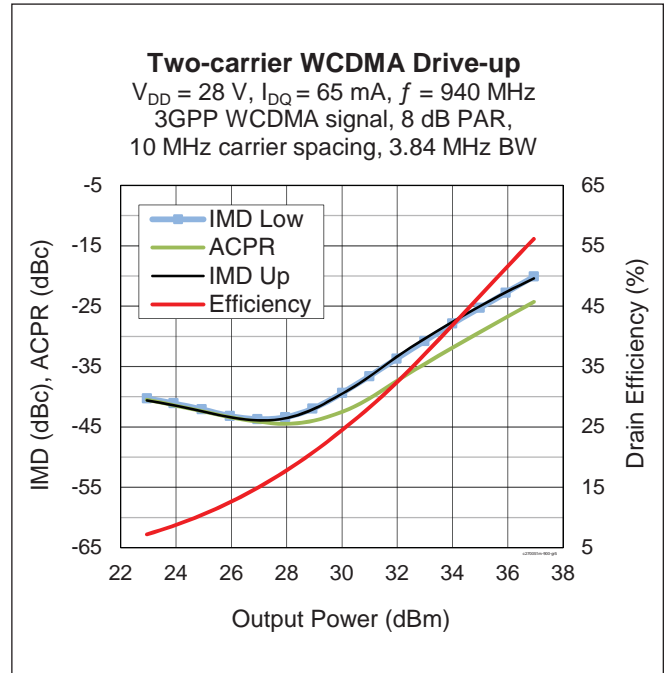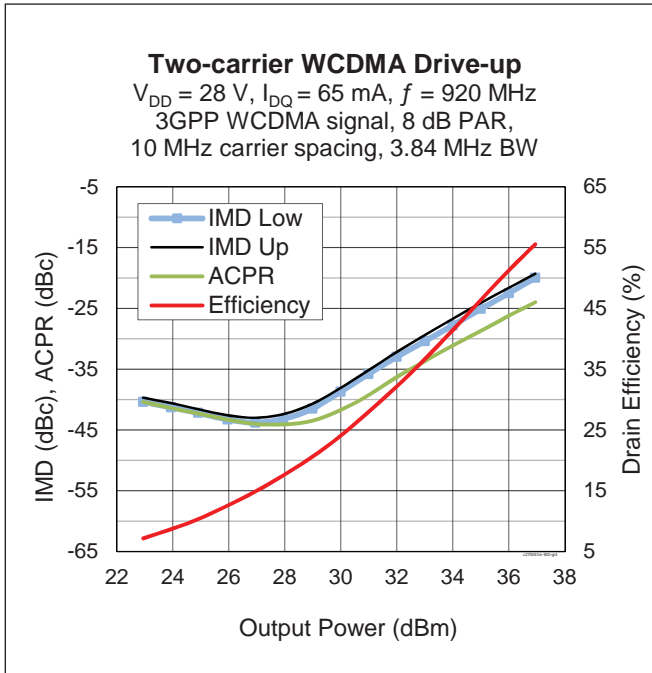


Typical Performance, 940 MHz (cont.)

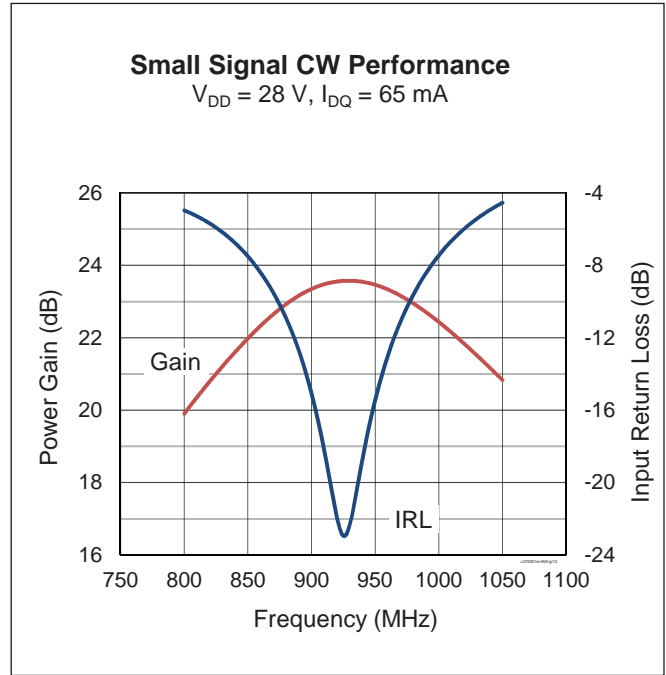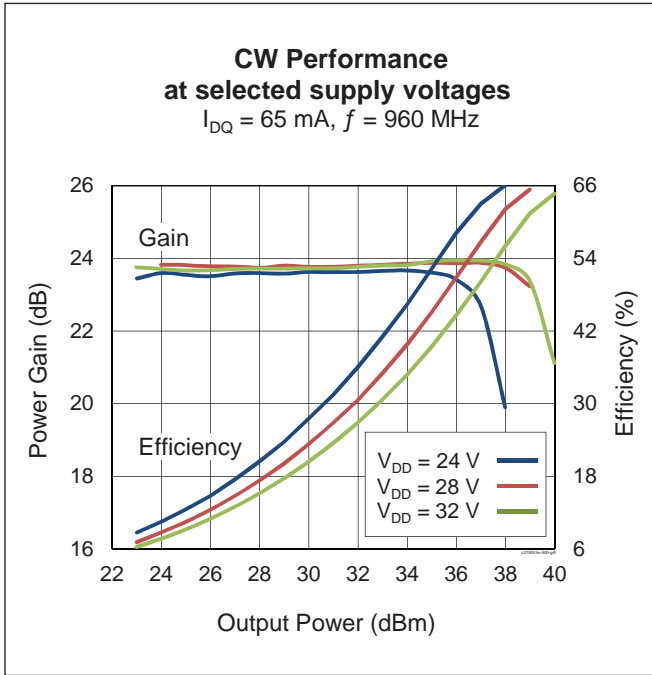

Broadband Circuit Impedance

Freq [MHz]	Z Source Ω		Z Load Ω	
	R	jX	R	jX
920	3.3	10	25.6	13.2
940	3.4	10.2	24.7	13.3
960	3.5	10.3	24.3	14.7



Loadpull Performance

Pulsed CW signal: 160 μsec , 10% duty cycle; 28 V, 65 mA

Class AB		P_{1dB}									
		Max Output Power					Max PAE				
Freq [MHz]	Zs [Ω]	Zl [Ω]	Gain [dB]	PAE [%]	POUT [dBm]	POUT [W]	Zl [Ω]	Gain [dB]	PAE [%]	POUT [dBm]	POUT [W]
920	3.35 + j10	25.7 + j4.7	25.5	62.2	39.40	8.7	25.6 + j21.7	27.6	70.7	38.00	6.3
940	3.4 + j10.2	24.8 + j6.3	25.6	62.1	39.35	8.6	24.6 + j20.4	27.3	69.2	38.10	6.5
960	3.55 + j10.3	24.4 + j6.6	25.3	60.3	39.10	8.1	24.1 + j22.8	27.3	68.2	37.50	5.6



RF Characteristics, 2655 MHz

Two-carrier WCDMA Specifications (not subject to production test—verified by design/characterization in Infineon test fixture)





$V_{DD} = 28\text{ V}$, $I_{DQ} = 65\text{ mA}$, $P_{OUT} = 0.8\text{ W avg}$, $f_1 = 2650\text{ MHz}$, $f_2 = 2660\text{ MHz}$
 3GPP WCDMA signal, channel bandwidth = 3.84 MHz, peak/average = 8 dB @ 0.01% CCDF

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	—	20.9	—	dB
Drain Efficiency	η_D	—	19	—	%
Intermodulation Distortion	IMD	—	-40	—	dBc



Typical Performance, 2655 MHz

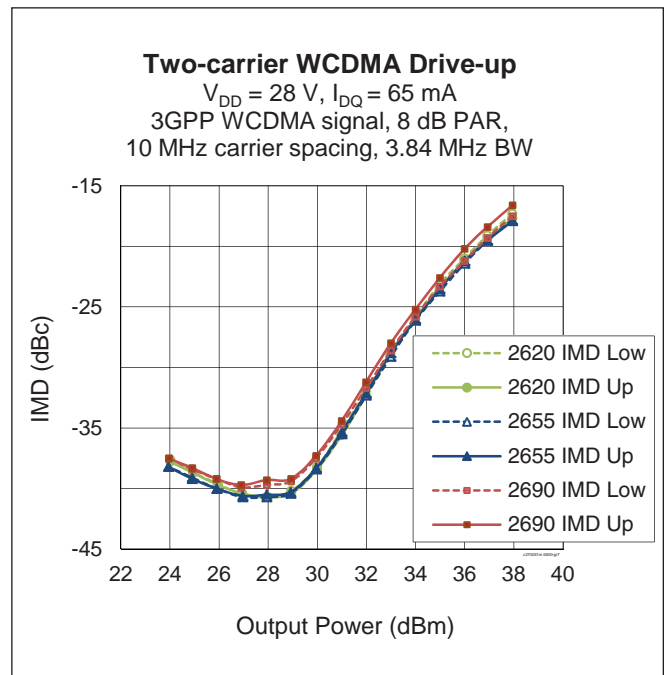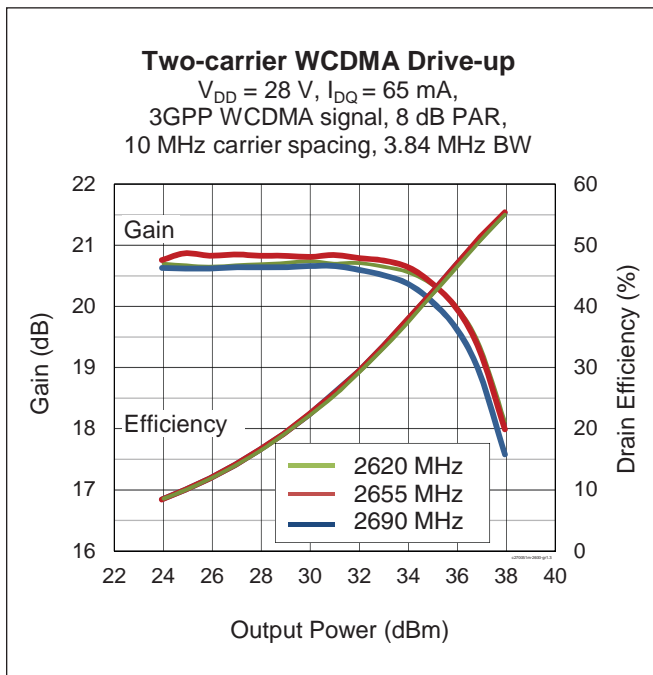

Typical Performance, 2655 MHz (cont.)

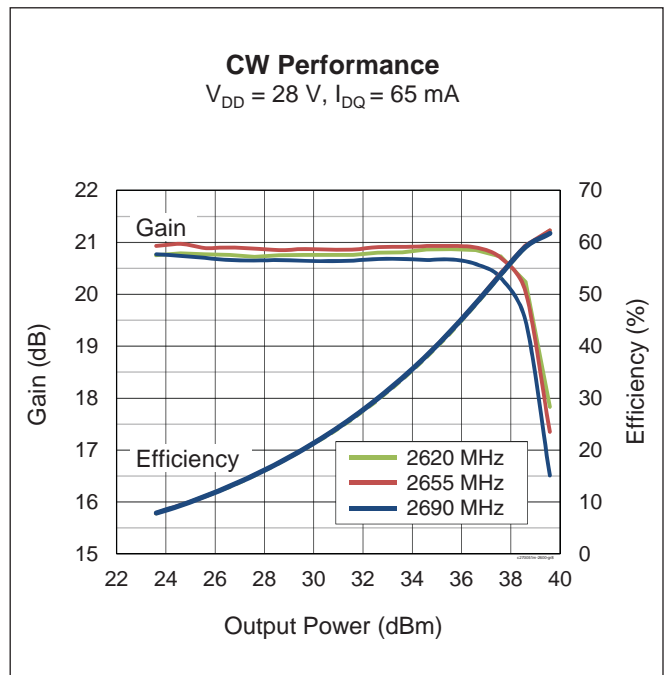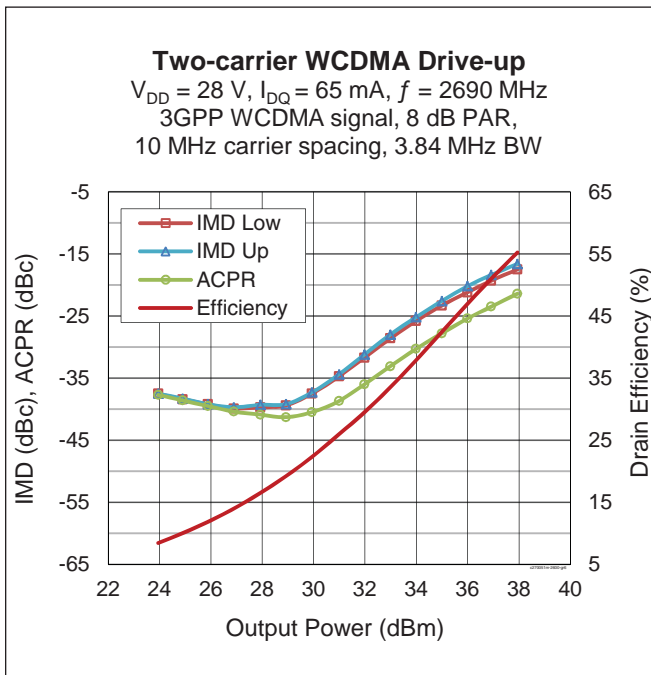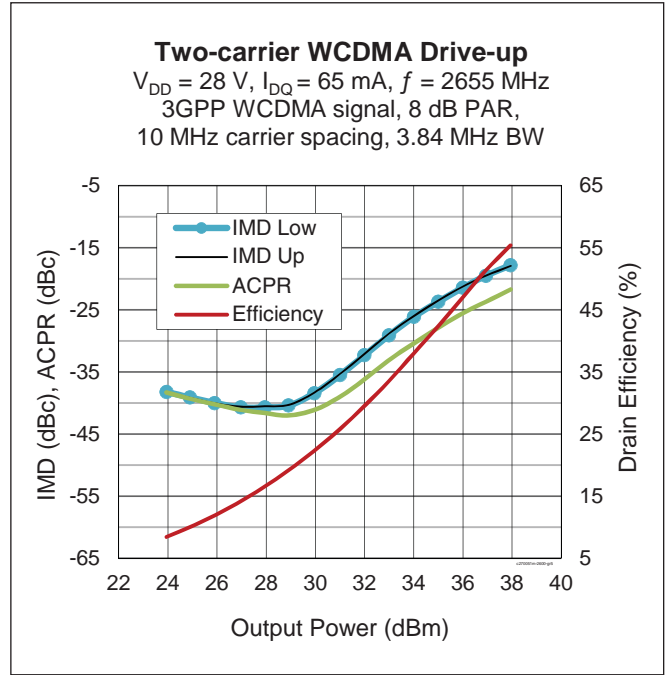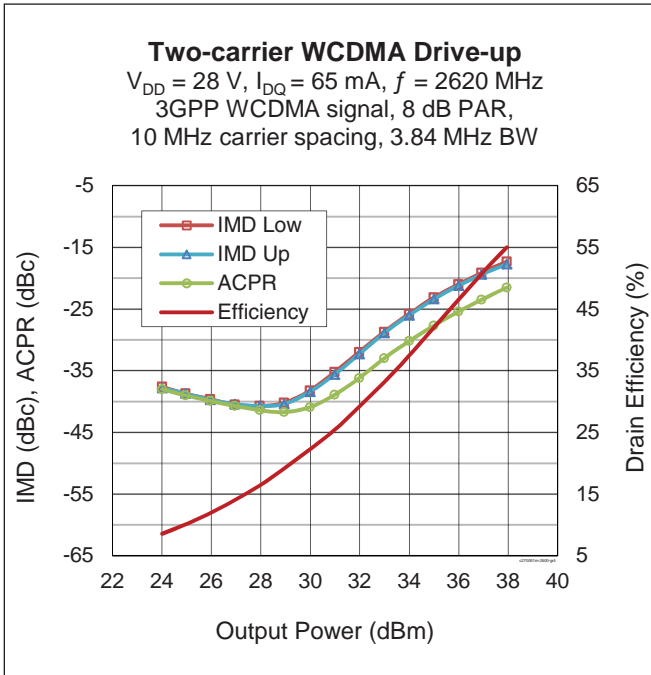


Typical Performance, 2655 MHz (cont.)

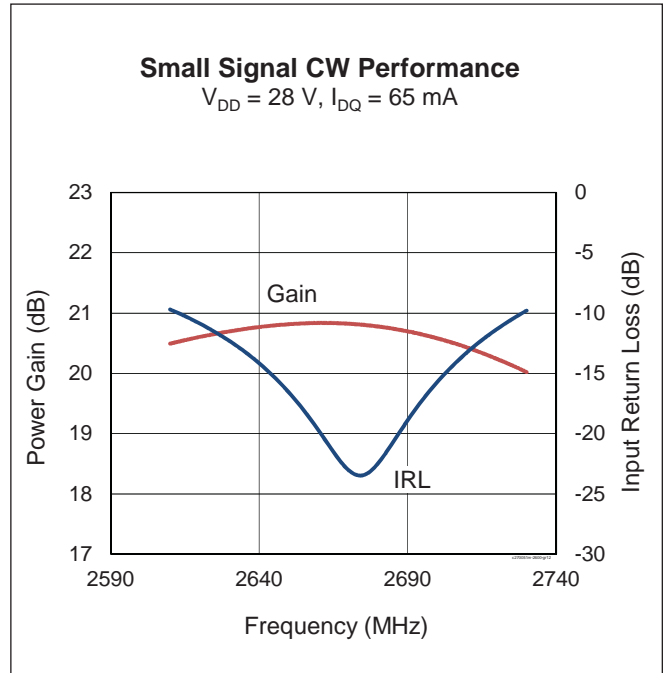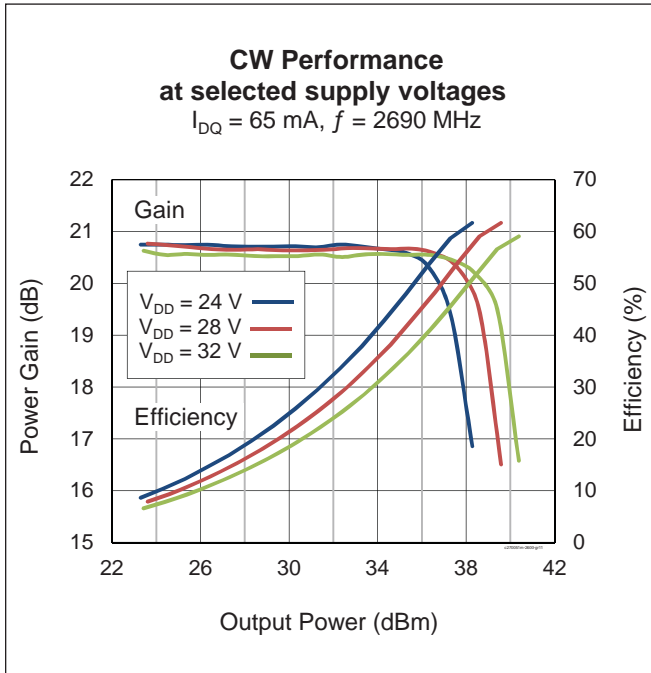

Broadband Circuit Impedance

Freq [MHz]	Z Source Ω		Z Load Ω	
	R	jX	R	jX
2490	1.5	-4.1	7.2	1.5
2590	1.5	-4.6	6.6	0.7
2690	1.5	-5.5	6.3	-0.6

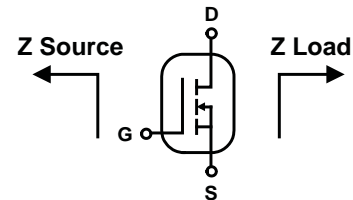


Load Pull Performance

Pulsed CW signal: 160 μsec , 10% duty cycle; 28 V, 65 mA

Class AB		P_{1dB}									
		Max Output Power					Max PAE				
Freq [MHz]	Zs [Ω]	Zl [Ω]	Gain [dB]	PAE [%]	POUT [dBm]	POUT [W]	Zl [Ω]	Gain [dB]	PAE [%]	POUT [dBm]	POUT [W]
2490	1.5 - j4.1	8.2 + j0.3	19.7	55.6	39.0	7.94	6.2 + j2.8	20.9	62.2	38.4	6.9
2590	1.5 - j4.6	6.9 - j0.8	18.8	55.6	39.0	7.94	5.0 + j2.1	21.0	63.4	37.9	6.2
2690	1.5 - j5.5	7.8 - j2.0	18.4	55.6	39.0	7.94	4.9 + j0.8	20.4	63.6	37.8	6.0

Package Outline Specifications

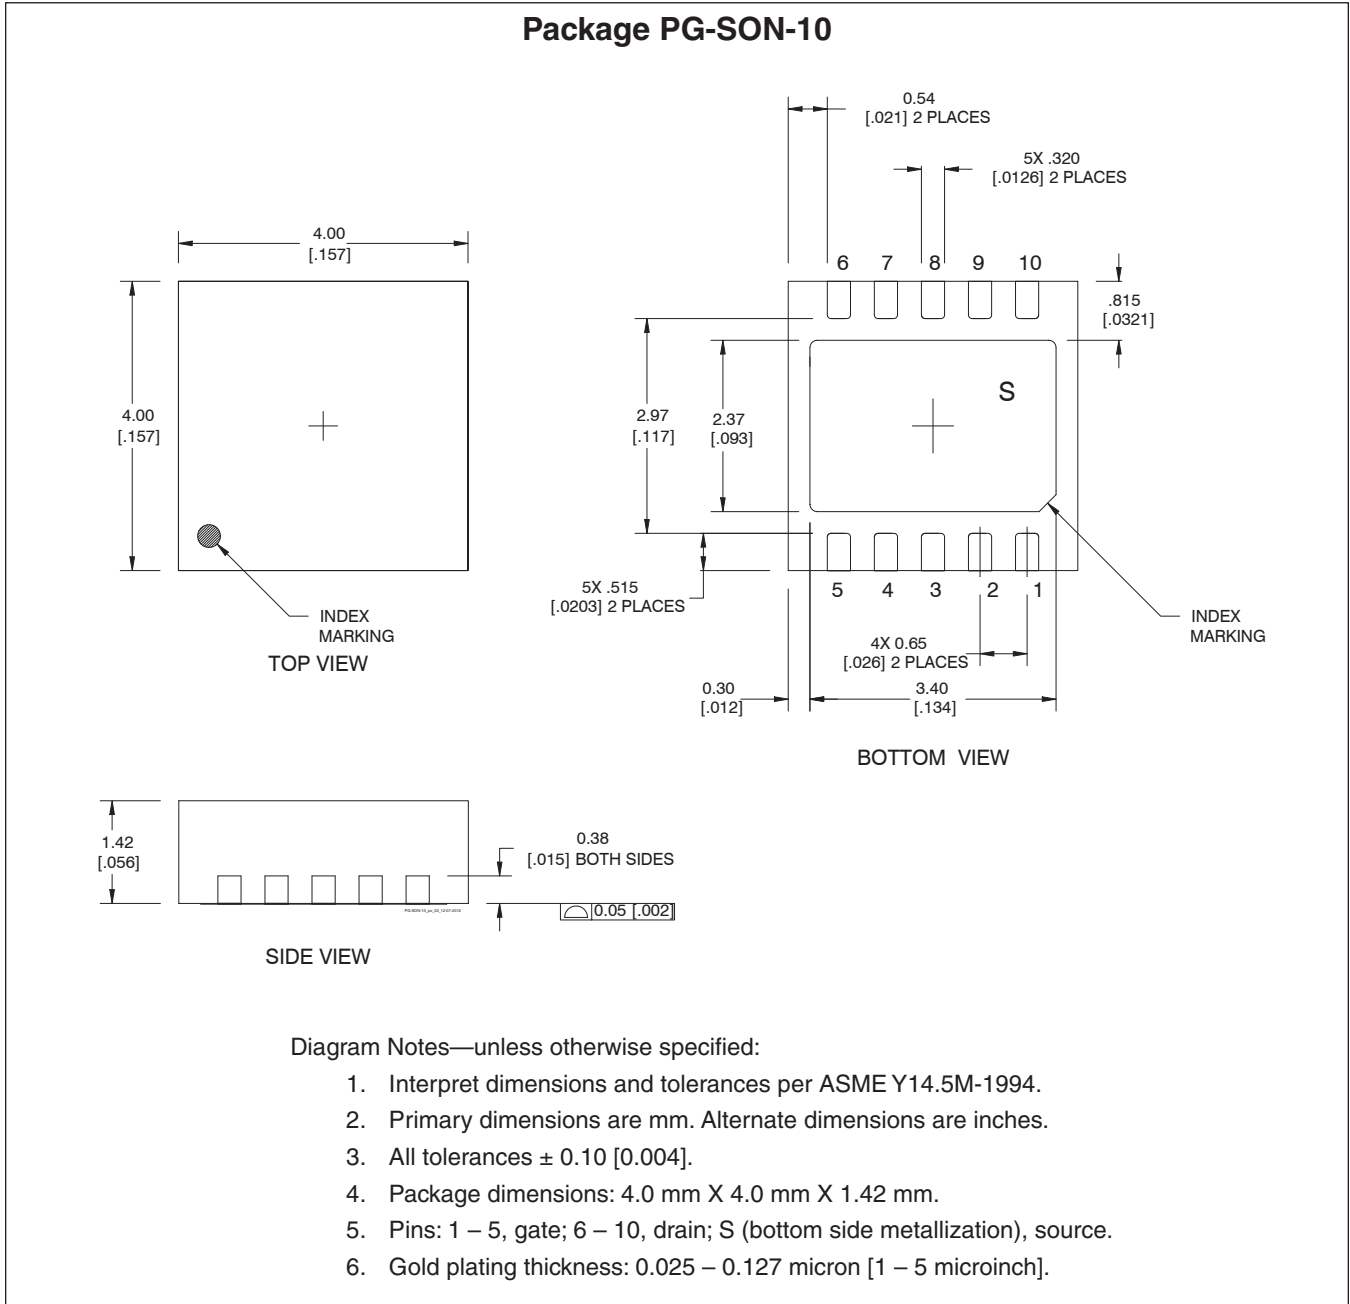

Find the latest and most complete information about products and packaging at the Infineon Internet page (<http://www.infineon.com/rfpower>)

Revision History


Revision	Date	Data Sheet	Page	Subjects (major changes since last revision)
01	2015-03-20	Production	All	Specifications and performance represent released product.
01.1	2016-07-26	Production	2	Add ordering information for additional evaluation boards.

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?
 Your feedback will help us to continuously improve the quality of this document.
 Please send your proposal (including a reference to this document) to:

[\(highpowerRF@infineon.com\)](mailto:highpowerRF@infineon.com)

To request other information, contact us at:
 +1 877 465 3667 (1-877-GO-LDMOS) USA
 or +1 408 776 0600 International



Edition 2016-07-26

**Published by
 Infineon Technologies AG
 85579 Neubiberg, Germany**

**© 2015 Infineon Technologies AG
 All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com/rfpower).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.