

BTE4000 / PTU4000 Series

Pressure transmitters

FEATURES

- 0...-1 to 0...10 bar absolute or gage¹,
0...-15 to 0...150 psi gage¹
- 0...5 V, 0...10 V, 1...6 V, 4...20 mA output
- Field interchangeable
- Rugged aluminium housing

MEDIA COMPATIBILITY

Wetted materials:
aluminium, silicon, glass

Housing:
Aluminium, protection class IP 65 (according to
DIN EN 60529) respectively NEMA 4¹



SPECIFICATIONS^{9,10}

Maximum ratings

Supply voltage (reverse polarity protection)²

BTE(M)/PTU4...0, ...1, ...7	13...30 V
BTE(M)/PTU4...4	12...36 V

Maximum load current

BTE(M)/PTU4...0, ...1, ...7	10 mA
-----------------------------	-------

Temperature limits

Storage	-55 to 100°C
Operating	-40 to 100°C
Compensated	0 to 50°C

Humidity limits 0 - 100 %RH

Vibration (5 to 500 Hz) 2 g


Mechanical shock 50 g

Proof pressure³


BTEM4.../PTU4x01..., 05...	1.4 bar / 20 psi
BTE4010.../PTU4150...	16 bar / 200 psi
all others	2 x rated pressure

ELECTRICAL CONNECTION

0...5 V, 0...10 V, 1...6 V output

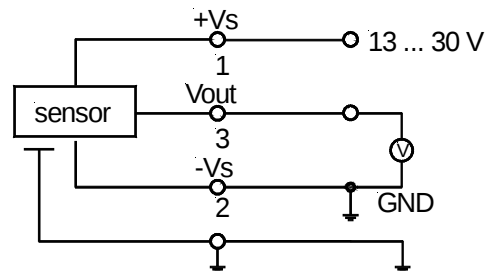

4...20 mA output

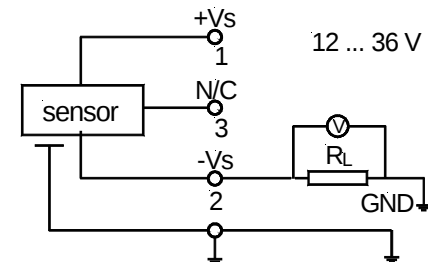

BTE4000 / PTU4000 Series

Pressure transmitters

COMMON PERFORMANCE CHARACTERISTICS

(V_s = 15 V, t_{amb} = 25°C)

Characteristics		Min.	Typ.	Max.	Unit
Operating pressure	BTEM40070..	0		70	mbar
	BTEM4P070..	-70		70	
	BTEM4N250..	-25		0	
	BTEM40350..	0		350	
	BTEM4N350..	-350		0	
	BTEM4P350..	-350		350	
	BTE4001..	0		1	bar
	BTE4N01..	-1		0	
	BTE4P01..	-1		1	
	BTE4002..	0		2	
	BTE4005..	0		5	
	BTE4010..	0		10	
	PTU4001..	0		1	psig
	PTU4P01..	-1		1	
	PTU4005..	0		5	
	PTU4P05..	-5		5	
	PTU4015..	0		15	
	PTU4P015..	-15		15	
	PTU4030..	0		30	
	PTU4100..	0		100	
	PTU4150	0		150	
Thermal effects (0 to 50°C) ⁵ (-20 to 0°C, 50 to 70°C) ⁵	Offset			0.04	%FSO/°C
	Span			0.04	
	Offset		0.02		
	Span		0.02		
Non-linearity and hysteresis (BSL) ⁶			±0.2	±0.50	%FS
Repeatability			±0.10		
Long term stability ⁷			±0.5		
Output noise (0 - 1 kHz)			±0.04		
Response time (10 to 90 %)			1.0		ms
Power supply rejection	Offset		0.05		%V
	Span		0.03		

BTE4000 / PTU4000 Series

Pressure transmitters

INDIVIDUAL PERFORMANCE CHARACTERISTICS¹

0...10 V output ($V_s = 15\text{ V}$, $R_L > 100\text{ k}\Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	BTE/PTU4N...	4.85	5.0	5.15	V
	all others	-0.15	0	0.15	
Full scale span ⁴	BTE/PTU4N...	4.9	5.0	5.1	
	all others	9.9	10.0	10.1	
Output impedance			6.0	50	Ω
Power consumption (no load)			100		mW

0...5 V output ($V_s = 15\text{ V}$, $R_L > 100\text{ k}\Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	BTE/PTU4N...	2.35	2.5	2.65	V
	all others	-0.15	0	0.15	
Full scale span ⁴	BTE/PTU4N...	2.4	2.5	2.6	
	all others	4.9	5.0	5.1	
Output impedance			6.0	50	Ω
Power consumption (no load)			100		mW

1...6 V output ($V_s = 15\text{ V}$, $R_L > 100\text{ k}\Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)

Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	BTE/PTU4N...	3.35	3.5	3.65	V
	all others	0.85	1.0	1.15	
Full scale span ⁴	BTE/PTU4N...	2.4	2.5	2.6	
	all others	4.9	5.0	5.1	
Output impedance			6.0	50	Ω
Power consumption (no load)			100		mW

4...20 mA output ($V_s = 15\text{ V}$, $R_L = 100\text{ }\Omega$, $t_{\text{amb}} = 25^\circ\text{C}$)


Characteristics		Min.	Typ.	Max.	Unit
Zero pressure offset	BTE/PTU4N...	11.8	12.0	12.2	mA
	all others	3.8	4.0	4.2	
Full scale span ⁴	BTE/PTU4N...	7.9	8.0	8.1	
	all others	15.8	16.0	16.2	
Output impedance			0.1		Ω
Power consumption ($I_L = 20\text{ mA}$)			260		mW

BTE4000 / PTU4000 Series


Pressure transmitters

OUTPUT CHARACTERISTICS


0...5 V output version

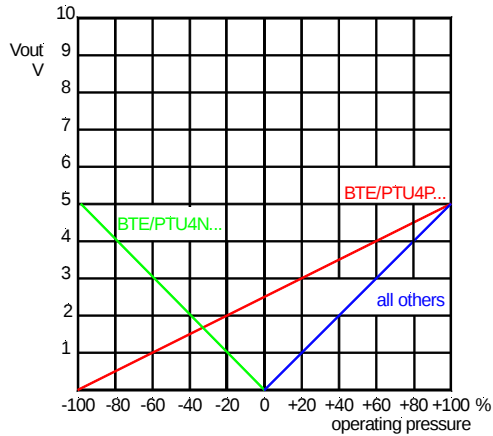


0...10 V output version

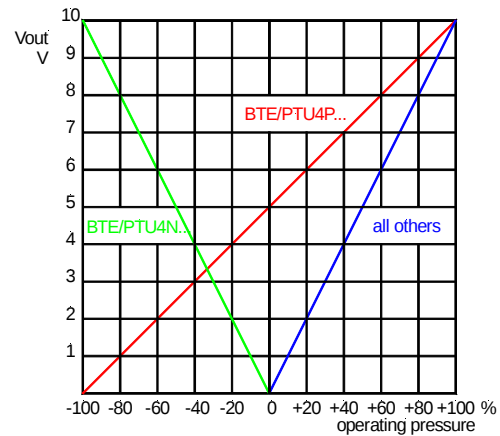


1...6 V output version

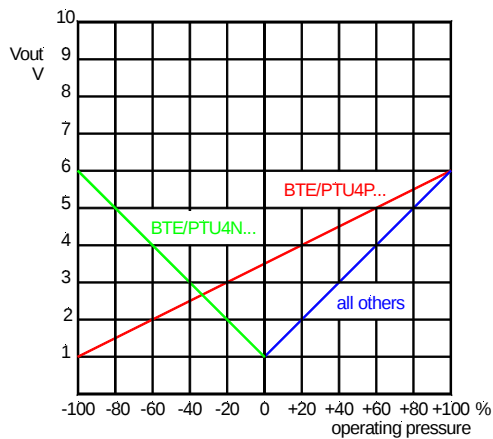

4...20 mA output version

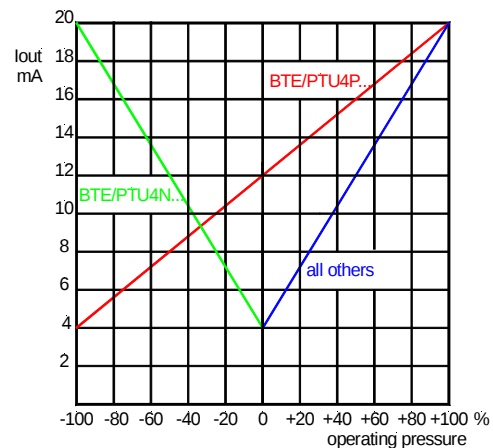

LOAD LIMITATION

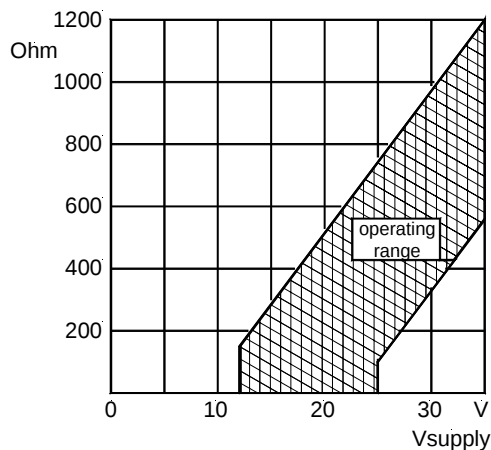


BTE4000 / PTU4000 Series

Pressure transmitters

ELECTROMAGNETIC CAPABILITY⁸

	Test conditions	Criterion	Interference
Radiated, radio frequency electromagnetic field immunity (RFI)	EN61000-4-3: Grade 3, 10 V/m, 80 to 1000 MHz 80 % AMC (1 kHz)	A	<1 %FSO
Electrical fast transient / burst immunity (EFT)	EN61000-4-4: Grade 3, ± 2 kV	B	<1 %FSO
Electrostatic discharge immunity test (ESD)	EN61000-4-2: Grade 4, ± 8 kV, contact discharge	B	<1 %FSO
Immunity to conducted disturbances induced by radio-frequency fields	EN61000-4-6: Grade 3, 0.15 to 80 MHz 10 V, 80 % AMC (1 kHz)	A	<1 %FSO


OUTLINE DRAWING

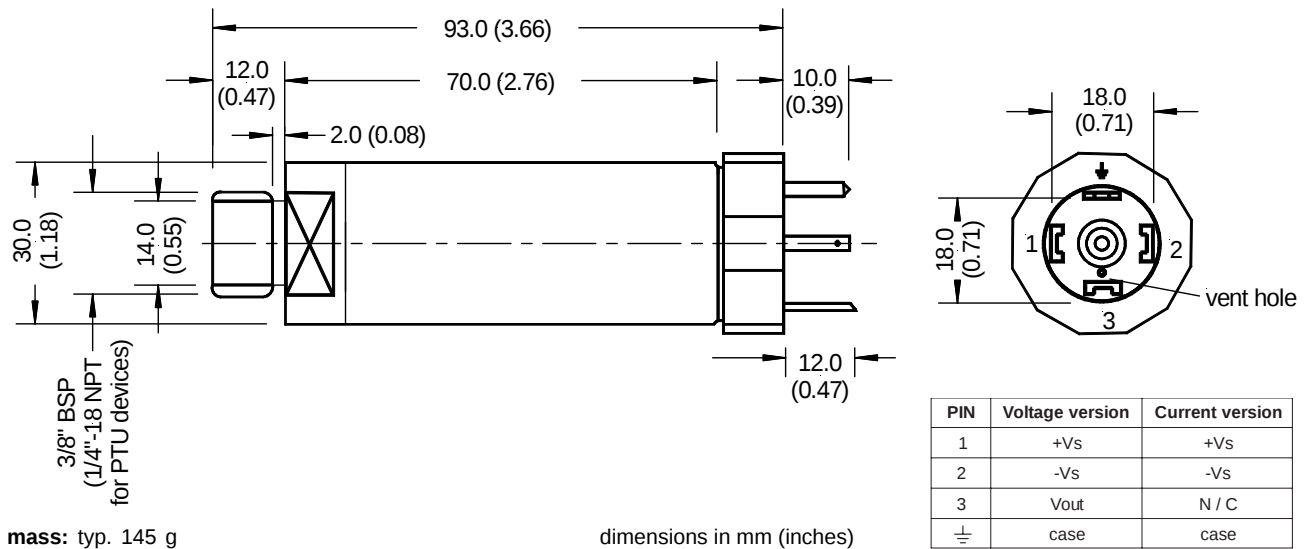

RECOMMENDED ACCESSORY

Plug **DIN EN 175301-803 A** and profile washer included in delivery.

For a complete connector/cable assembly use order no. **ZK000110-x** (x=cable lengths in m).

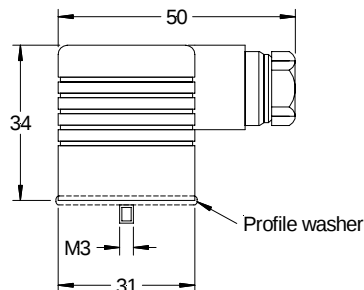

dimensions in mm

Note: For proper function of all gage devices the gage port must be vented to the atmosphere through the connector/cable assembly.

BTE4000 / PTU4000 Series

Pressure transmitters

Specification notes:

1. IP 65 protection is given with locked connector only. The package is an all-sealed housing. For proper function, the gage port is vented to the atmosphere through the connecting cable. Thus, the cable end must have access to the ambient pressure.
2. The minimum supply voltage is directly proportional to the load resistance seen by the transmitter. For more details see the load limitation diagram.
3. Proof pressure is the maximum pressure which may be applied without causing damage to the sensing element.
4. Full scale span is the algebraic difference between the positive full scale output and offset.
5. Thermal effects tested and guaranteed from 0 to 50°C relative to 25°C. All specifications shown are relative to 25°C.
6. Linearity refers to the Best Straight Line fit measured for offset pressure, full scale pressure and 1/2 full scale pressure.
7. Long term stability is the change in output after one year or 1 million pressure cycles.
8. Test are in accordance with EN61000-6-2, April 1999.
9. CE-labelling is in accordance with 89/336/EEC.
10. The pressure transmitters must not be used as safety accessories according to article 1, 2.1.3 of the directive 97/23/EC.

ORDERING INFORMATION

		<u>xTx(x)4</u>	<u>(x)xxx</u>	<u>X</u>	<u>X</u>		
BTE(M):	(m)bar calibration						
PTU:	psi calibration						
					<u>Output signal</u>		
					0: 0...10 V		
					1: 1...6 V		
					4: 4...20 mA		
					7: 0...5 V		
					<u>Pressure mode</u>		
					G: gage pressure ¹		
					A: absolute pressure		
					(available for pressure ranges from 1 bar/15 psi upwards only)		
<u>BTE(M)4000 series</u>		<u>PTU4000 series</u>					
001:	0 to 1 bar	001:	0 to 1 psi				
N01:	0 to -1 bar	P01:	-1 to +1 psi				
P01:	-1 to +1 bar	005:	0 to 5 psi				
002:	0 to 2 bar	P05:	-5 to +5 psi				
005:	0 to 5 bar	015:	0 to 15 psi				
010:	0 to 10 bar	P15:	-15 to +15 psi				
0070:	0 to 70 mbar	030:	0 to 30 psi				
P070:	-70 to +70 mbar	100:	0 to 100 psi				
N250:	0 to -250 mbar	150:	0 to 150 psi				
0350:	0 to 350 mbar						
N350:	0 to -350 mbar						
P350:	-350 to +350 mbar						

Note: Other pressure ranges and options are widely available.
Please contact your nearest Sensortechincs sales representative.

Sensortechincs reserves the right to make changes to any products herein. Sensortechincs does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.