

## PVT422P

Microelectronic Power IC  
HEXFET® Power MOSFET Photovoltaic Relay  
Dual Pole, Normally Open  
0-400V, 120mA AC/DC


### General Description

The PVT422P Series Photovoltaic Relay is a dual-pole, normally open solid-state relay that can replace electromechanical relays in many applications. It utilizes International Rectifier's HEXFET power MOSFET as the output switch, driven by an integrated circuit photovoltaic generator of novel construction. The output switch is controlled by radiation from a GaAlAs light emitting diode (LED) which is optically isolated from the photovoltaic generator.

PVT422P is ideally suited for PCMCIA card applications. Its extremely low profile allows it to be used in Type II cards whose outer shells are only 5mm thick. Series PVT422P Relays are packaged in an 8-pin, molded 'Thin-Pak' DIP package with 'gull-wing' surface mount terminals. It is available in plastic shipping tubes or on tape-and-reel. Please refer to Part Identification (opposite) for details.

### Features

- HEXFET Power MOSFET output
- Bounce-free operation
- 3,750 V<sub>RMS</sub> I/O isolation
- Load current limiting
- Linear AC/DC operation
- Solid-State Reliability
- BABT certified



**PVT422P - Thin-Pak**

### Applications

- On/Off Hook switch
- Dial-Out relay
- Ring injection relay
- General switching

### Part Identification

PVT422P surface-mount, plastic shipping tube

PVT422P-T surface-mount, tape-and-reel

*(HEXFET is the registered trademark for International Rectifier Power MOSFETs)*

**Electrical Specifications** (-40°C  $T_A$ +85°C unless otherwise specified)

| INPUT CHARACTERISTICS                                                  | Limits    | Units |
|------------------------------------------------------------------------|-----------|-------|
| Minimum Control Current (See figure1)                                  | 2.0       | mA    |
| Maximum Control Current for Off-State Resistance @ $T_A$ =+25°C        | 0.4       | mA    |
| Control Current Range (Caution: current limit input LED, see figure 5) | 2.0 to 25 | mA    |
| Maximum Reverse Voltage                                                | 6.0       | V     |

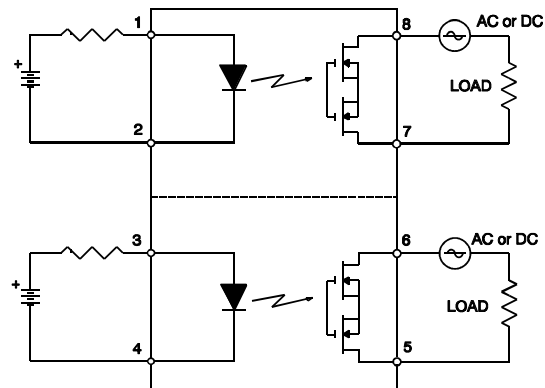
  

| OUTPUT CHARACTERISTICS                                                                                | Limits         | Units                                  |
|-------------------------------------------------------------------------------------------------------|----------------|----------------------------------------|
| Operating Voltage Range                                                                               | 0 to $\pm 400$ | $V_{(DC \text{ or } AC \text{ peak})}$ |
| Maximum Load Current @ $T_A$ =+40°C<br>5mA Control (See figure 1) (single and dual channel operation) | 120            | mA                                     |
| Maximum Peak Load Current (10ms maximum duration)<br>(single and dual channel operation)              | 350            | mA                                     |
| Maximum On-State Resistance @ $T_A$ =+25°C<br>For 50mA Pulsed load, 5mA Control (see figure3)         | 35             | $\Omega$                               |
| Maximum Off-State Leakage @ $T_A$ =+25°C, $\pm 320V$ (see figure 4)                                   | 1.0            | $\mu A$                                |
| Maximum Turn-On Time @ $T_A$ =+25°C (see figure 6)<br>For 50mA, 100 $V_{DC}$ load, 5mA Control        | 2.0            | ms                                     |
| Maximum Turn-Off Time @ $T_A$ =+25°C (see figure 6)<br>For 50mA, 100 $V_{DC}$ load, 5mA Control       | 2.0            | ms                                     |
| Maximum Output Capacitance @ 50 $V_{DC}$                                                              | 12             | pF                                     |

| GENERAL CHARACTERISTICS                                                          | Limits      | Units     |
|----------------------------------------------------------------------------------|-------------|-----------|
| Minimum Dielectric Strength, Input-Output                                        | 3750        | $V_{RMS}$ |
| Minimum Dielectric Strength, Pole-to-Pole                                        | 1000        | $V_{DC}$  |
| Minimum Insulation Resistance, Input-Output, @ $T_A$ =+25°C, 50%RH, 100 $V_{DC}$ | $10^{12}$   |           |
| Maximum Capacitance, Input-Output                                                | 1.0         | pF        |
| Maximum Pin Soldering Temperature (10 seconds maximum)                           | +260        |           |
| Ambient Temperature Range:                                                       | Operating   | °C        |
|                                                                                  | Storage     |           |
|                                                                                  | -40 to +85  |           |
|                                                                                  | -40 to +100 |           |

International Rectifier does not recommend the use of this product in aerospace, avionics, military or life support applications. Users of this International Rectifier product in such applications assume all risks of such use and indemnify International Rectifier against all damages resulting from such use.

**Connection Diagram**

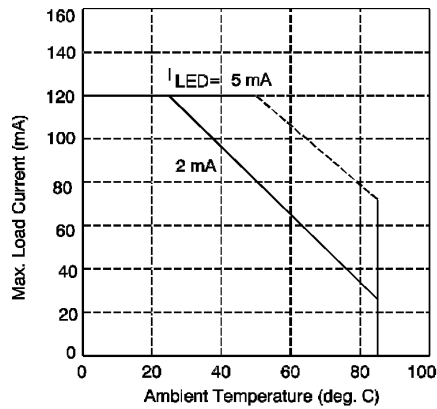


Figure 1. Typical Current Derating Curve

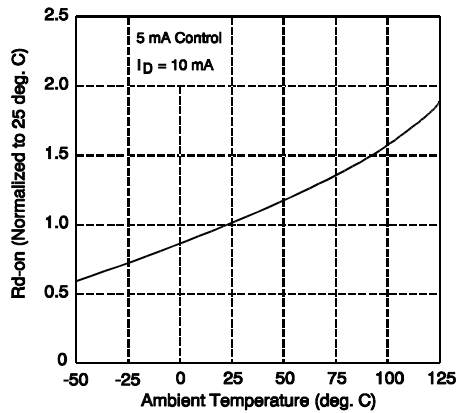


Figure 3. Typical Normalized On-Resistance

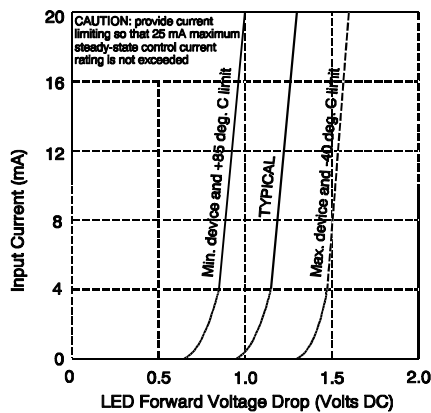


Figure 5. Input Characteristics (Current Controlled)

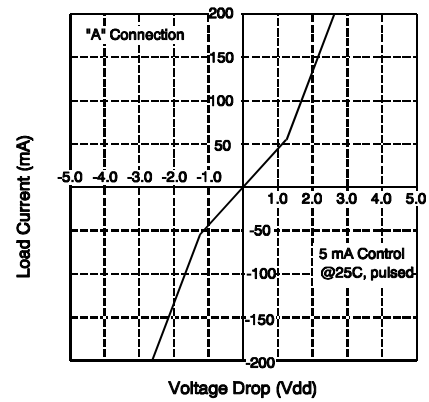


Figure 2. Linearity Characteristics

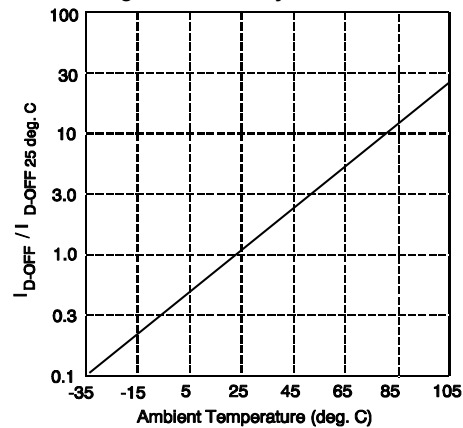


Figure 4. Typical Normalized Off-State Leakage

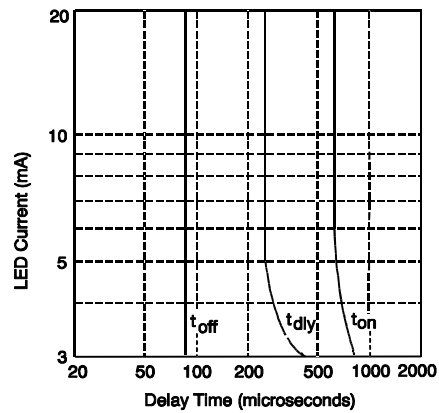


Figure 6. Typical Delay Times

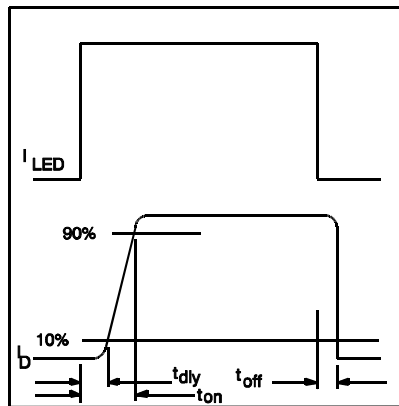


Figure 7. Delay Time Definitions

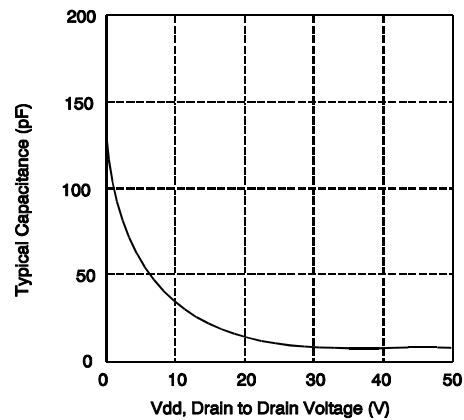
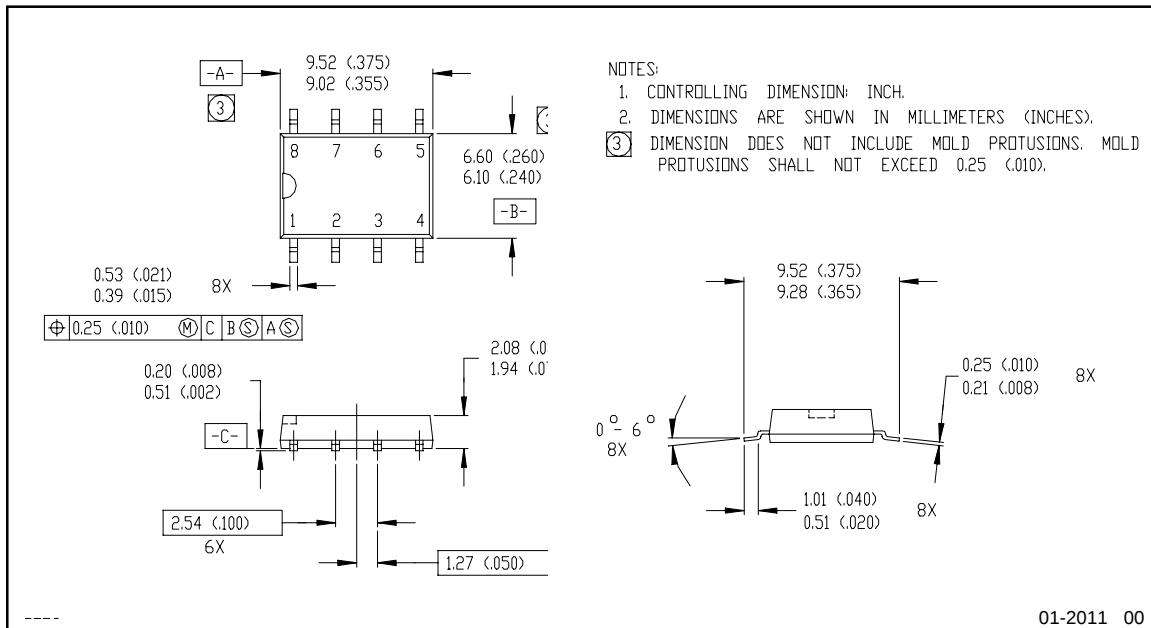


Figure 8. Typical Output Capacitance

## Case Outline



IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105  
Data and specifications subject to change without notice. 2/2/2007