

NPN Transistor



Features

- Moisture sensitivity level 1
- Halogen free and RoHS compliant
- Surface mount package ideally suited for automatic insert ion


Application

- Signal amplification
- Switching circuit

Mechanical data

- **Package:** SOT-223
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■Equivalent circuit

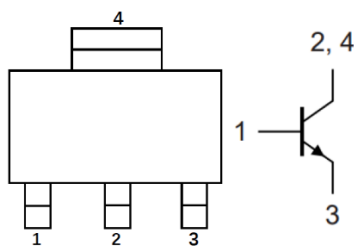

■ Maximum Ratings ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Conditions	Value
Device marking code				ZT4401
Collector-base voltage	V_{CBO}	V	$I_C=100\mu\text{A}$, $I_E=0$	60
Collector-emitter voltage	V_{CEO}	V	$I_C=1\text{mA}$, $I_B=0$	40
Emitter-base voltage	V_{EBO}	V	$I_E=100\mu\text{A}$, $I_C=0$	6
Collector current	I_C	mA		600
Power dissipation	P_D	W		0.5
Operation junction temperature	T_J	$^{\circ}\text{C}$		-55 to +150
Storage temperature	T_{STG}	$^{\circ}\text{C}$		-55 to +150



PZT4401

■ Electrical Characteristics (T_a=25°C Unless otherwise specified)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	V _{(BR)CBO}	V	I _C =100μA, I _E =0	60		
Collector-emitter breakdown voltage	V _{(BR)CEO}	V	I _C =1mA, I _B =0	40		
Emitter-base breakdown voltage	V _{(BR)EBO}	V	I _E =100μA, I _C =0	6		
Collector-base cut-off current	I _{CBO}	nA	V _{CB} =60V			50
Emitter-base cutoff current	I _{EBO}	nA	V _{EB} =6V			50
DC current gain	h _{FE1}		V _{CE} =1V, I _C =0.1mA	20		
	h _{FE2}		V _{CE} =1V, I _C =1mA	40		
	h _{FE3}		V _{CE} =1V, I _C =10mA	80		
	h _{FE3}		V _{CE} =1V, I _C =150mA	100		300
Collector-emitter saturation voltage	V _{CE(sat)}	V	I _C =150mA, I _B =15mA			0.4
			I _C =500mA, I _B =50mA			0.75
Base-emitter saturation voltage	V _{BE(sat)}	V	I _C =150mA, I _B =15mA			0.95
			I _C =500mA, I _B =50mA			1.2

■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	R _{θJ-A} ⁽¹⁾	°C/W	250
Thermal resistance, junction-to-case	R _{θJ-C} ⁽¹⁾	°C/W	50







Note1: The device is installed and tested on 25.4 * 25.4 * 1.5mm P.C.B.

■ Ordering Information

Preferred P/N	Package code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
PZT4401	F2	Approximate 0.11	2500	5000	25000	13" reel






■ Characteristics(Typical)

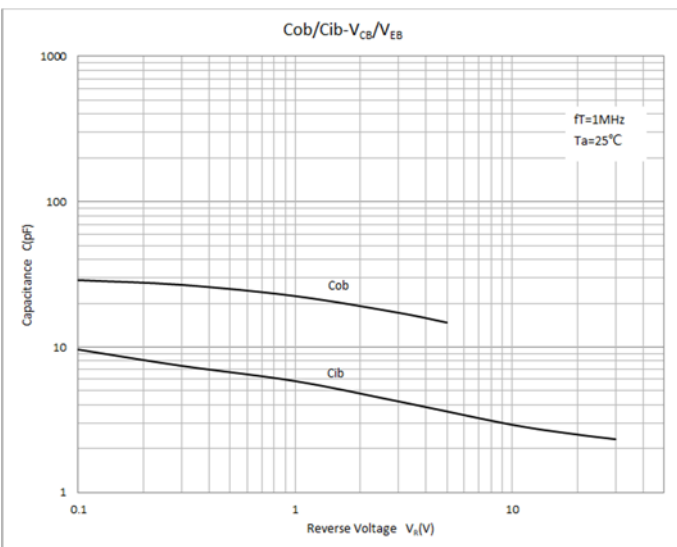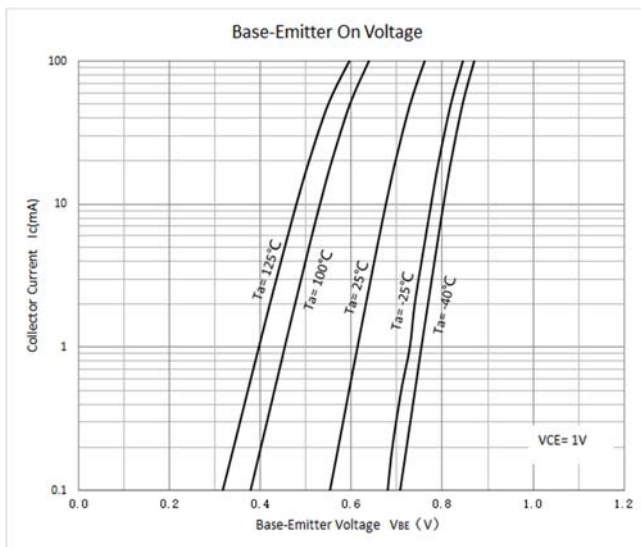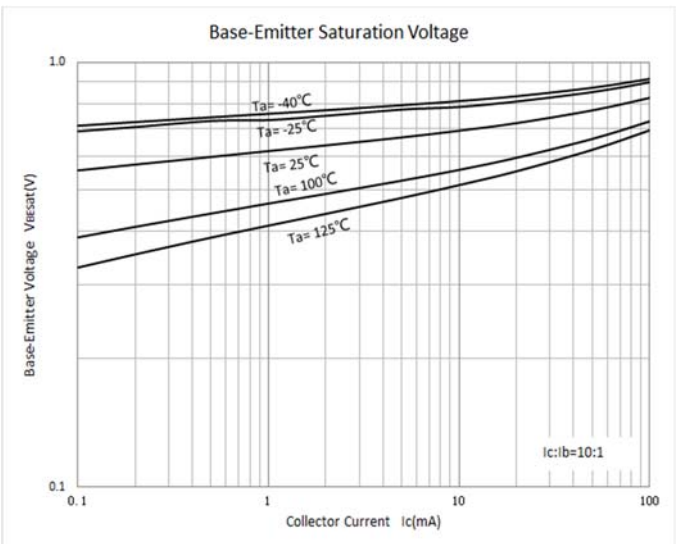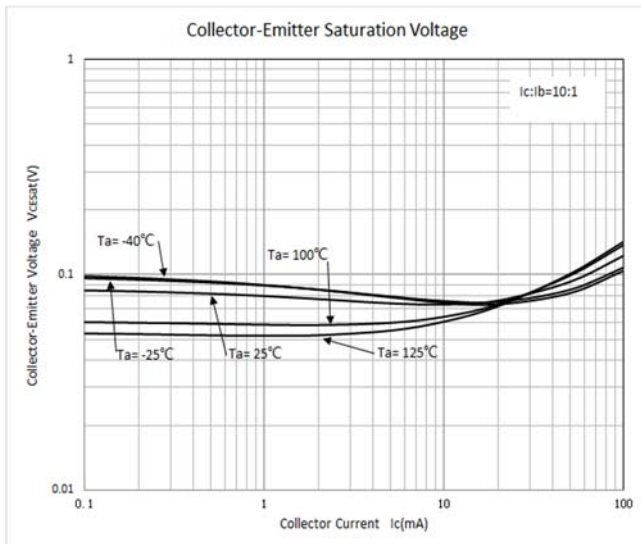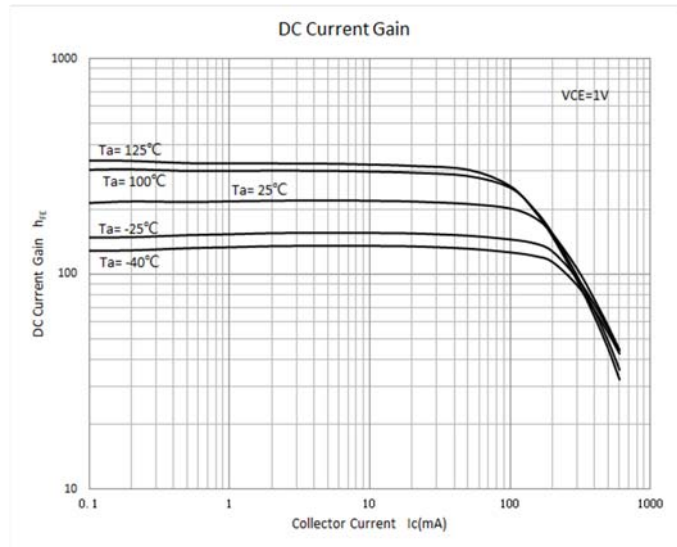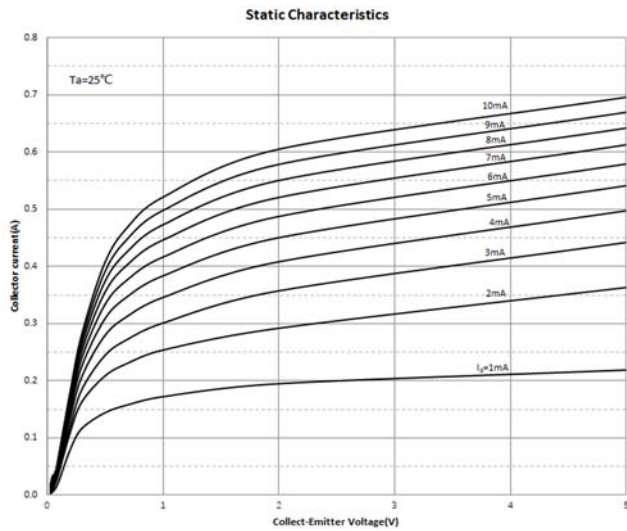




PZT4401

■ Outline Dimensions



DIM	DIMENSIONS			
	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.0591	0.0670	1.5000	1.7000
A1	0.0008	0.0039	0.0200	0.1000
b	0.0259	0.0330	0.6600	0.8400
b1	0.1140	0.1220	2.9000	3.1000
c	0.0090	0.0138	0.2300	0.3500
D	0.2480	0.2640	6.3000	6.7000
E	0.2637	0.2874	6.7000	7.3000
E1	0.1290	0.1460	3.3000	3.7000
e	0.0866	0.0945	2.2000	2.4000
L	0.0295	0.0492	0.7500	1.2500
θ	0°	10°	0°	10°

■ Suggested Pad Layout

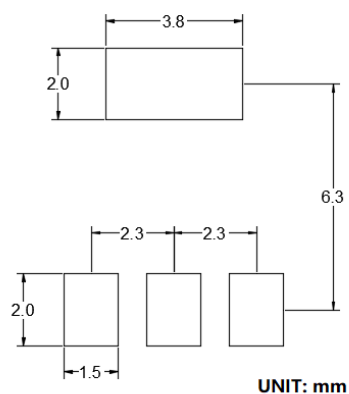



PZT4401

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.