



NPN Silicon Planar Epitaxial Transistor

 Lead(Pb)-Free



1.BASE
2.COLLECTOR
3.EMITTER
4.COLLECTOR



SOT-223

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V _{CEO}	160	V
Collector-Base Voltage	V _{CBO}	180	V
Emitter-Base Voltage	V _{EBO}	6	V
Collector Current (DC)	I _C	600	mA
Total Device Dissipation	P _D	1.5	W
Junction Temperature	T _j	150	°C
Storage, Temperature	T _{stg}	-55 to +150	°C

www.DataSheet4U.com

Device Marking

PZT5551=5551

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Min	Typ	Max	Unit
Collector-Emitter Breakdown Voltage (I _C =1mA, I _B =0)	V _{(BR)CEO}	160	-	-	V
Collector-Base Breakdown Voltage (I _C =100μA, I _E =0)	V _{(BR)CBO}	180	-	-	V
Emitter-Base Breakdown Voltage (I _E =10 μA, I _C =0)	V _{(BR)EBO}	6	-	-	V
Collector-Emitter Cutoff Current (V _{CB} =120V, I _E =0)	I _{CBO}	-	-	50	nA
Emitter-Base Cutoff Current (V _{EB} =4V, I _C =0)	I _{EBO}	-	-	50	nA

ON CHARACTERISTICS

Characteristics	Symbol	Min	Typ	Max	Unit
DC Current Gain ($V_{CE} = 5V, I_C = 1mA$) ($V_{CE} = 5V, I_C = 10mA$) ($V_{CE} = 5V, I_C = 50mA$)	h_{FE1} h_{FE2} h_{FE3}	80 80 50	- 160 -	- 400 -	-
Collector-Emitter Saturation Voltages ($I_C = 10mA, I_B = 1mA$) ($I_C = 50mA, I_B = 5mA$)	$V_{CE(sat)}$	- -	- -	0.15 0.2	V V
Base-Emitter Saturation Voltages ($I_C = 10mA, I_B = 1mA$) ($I_C = 50mA, I_B = 5mA$)	$V_{BE(sat)}$	-	-	1	V

DYNAMIC CHARACTERISTICS

Current-Gain ($V_{CE} = 10V, I_C = 10mA, f = 100MHz$)	fT	100	-	300	MHz
Output Capacitance ($V_{CB} = 10V, I_E = 0, f = 1MHz$)	C_{ob}	-	-	6	pF

CLASSIFICATION OF h_{FE2}

Rank	A	N	C
Range	80 - 200	100 - 250	160 - 400

Characteristics Curve

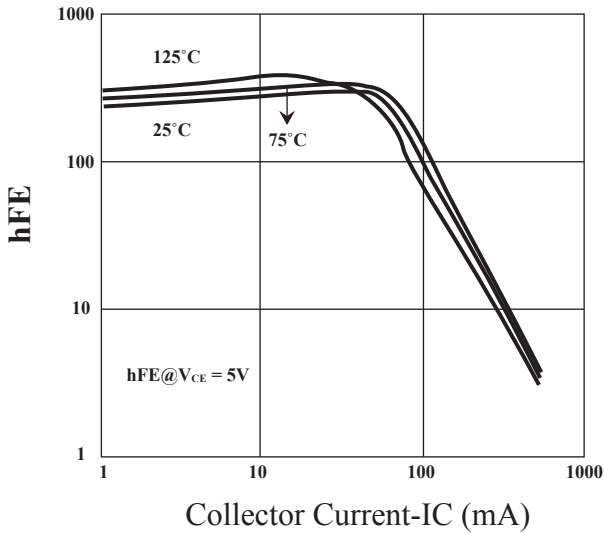


Fig.1 Current Gain & Collector Current

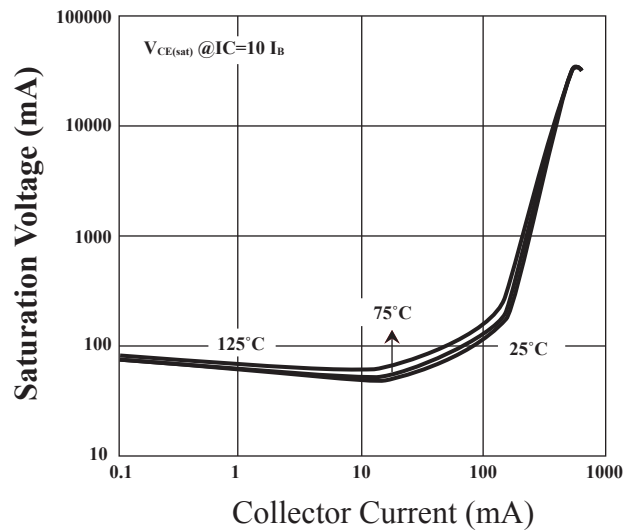


Fig.2 Saturation Voltage & Collector Current

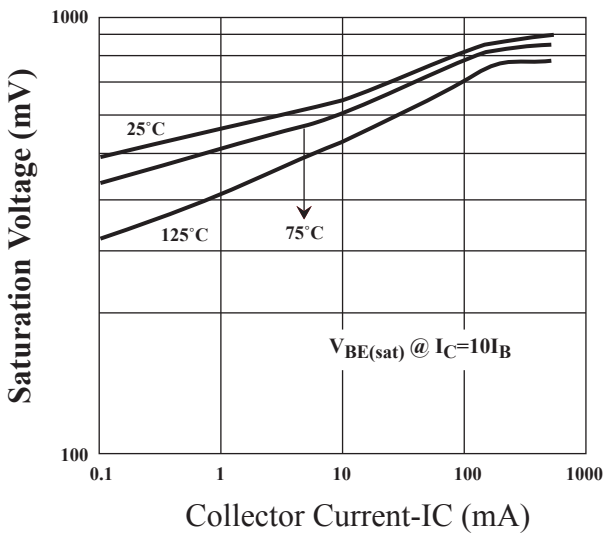


Fig.3 Saturation Voltage & Collector Current

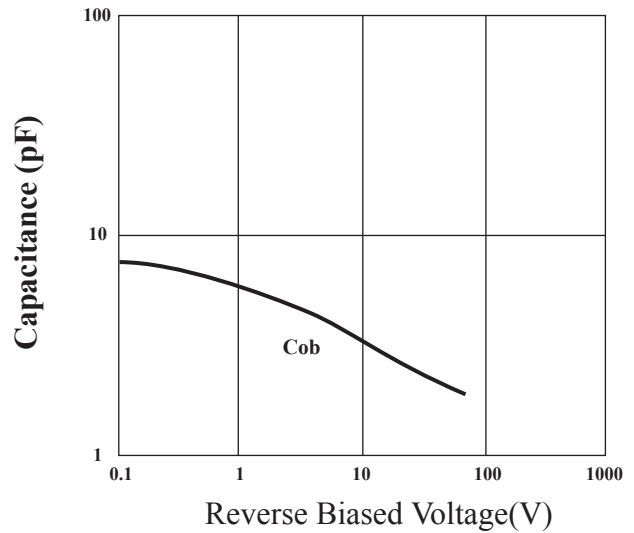


Fig.4 Capacitance & Reverse-Biased Voltage

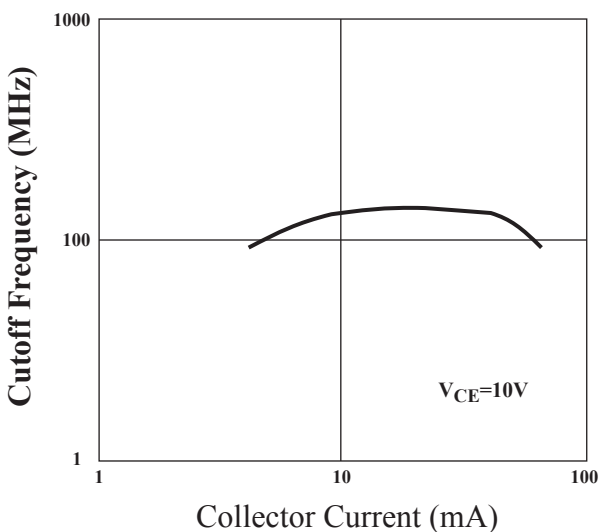


Fig.5 Cutoff Frequency & Collector Current



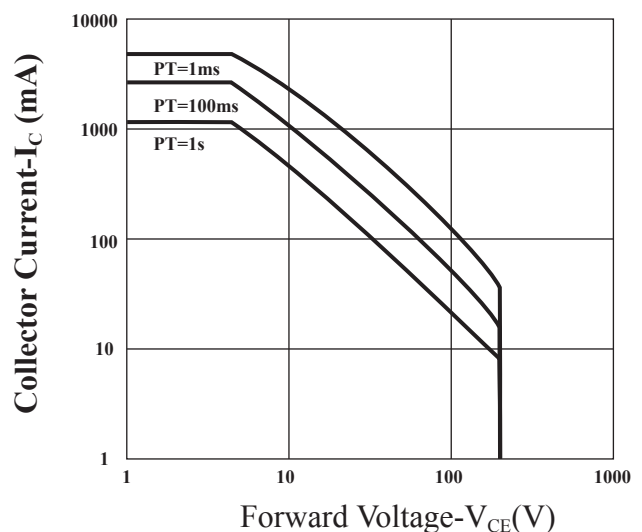


Fig.6 Safe Operation Area

SOT-223 Outline Dimensions

unit:mm

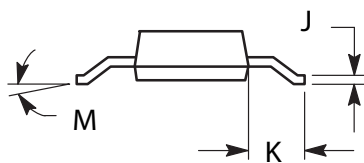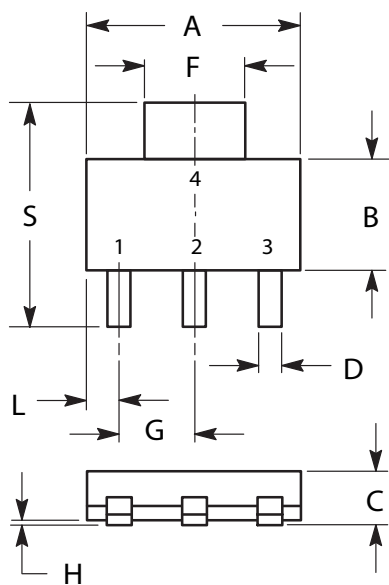

DIM	MILLIMETERS	
	MIN	MAX
A	6.30	6.70
B	3.30	3.70
C	1.50	1.75
D	0.60	0.89
F	2.90	3.20
G	2.20	2.40
H	0.020	0.100
J	0.24	0.35
K	1.50	2.00
L	0.85	1.05
M	0°	10°
S	6.70	7.30