



Features


- High breakdown voltage
- Low collector-emitter saturation voltage
- Complementary type: PZTA92(PNP)



Marking and pin assignment



SOT-223 top view



Schematic diagram



Halogen-Free

Maximum Ratings(Ta=25°C unless otherwise noted)



Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	300	V
V_{CEO}	Collector-Emitter Voltage	300	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current -Continuous	0.2	A
I_{CM}	Peak Pulse Collector Current	0.5	A
P_C	Collector Power Dissipation	1	W
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C







Ordering Information (Example)

Type	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
PZTA42	ZTA42	2,500	5,000	35,000	13"reel



Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=100\mu A, I_E=0$	300	--	--	V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=1mA, I_B=0$	300	--	--	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=100\mu A, I_C=0$	6	--	--	V
I_{CBO}	Collector cut-off current	$V_{CB}=200V, I_E=0$	--	--	0.1	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=6V, I_C=0$	--	--	0.1	μA
h_{FE1}	DC current gain	$V_{CE}=10V, I_C=1mA$	25	--	--	--
h_{FE2}		$V_{CE}=10V, I_C=10mA$	40	--	--	
h_{FE3}		$V_{CE}=10V, I_C=30mA$	40	--	--	
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C=20mA, I_B=2mA$	--	--	0.5	V
$V_{BE(sat)}$	Base-emitter saturation voltage	$I_C=20mA, I_B=2mA$	--	--	0.9	V
f_T	Transition frequency	$V_{CE}=20V, I_C=10mA, f=100MHz$	50	--	--	MHz
C_{ob}	Collector output capacitance	$V_{CB}=20V, I_E=0, f=1MHz$	--	--	3	pF

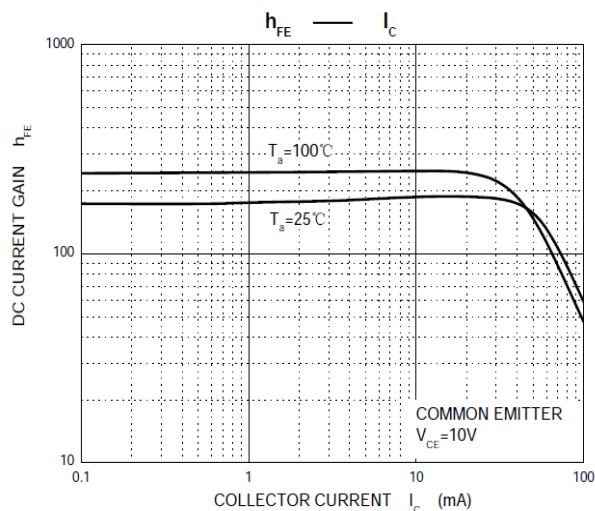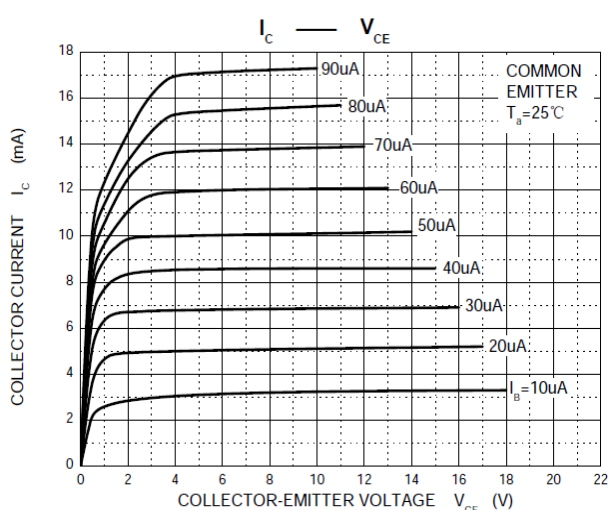Typical Characteristics

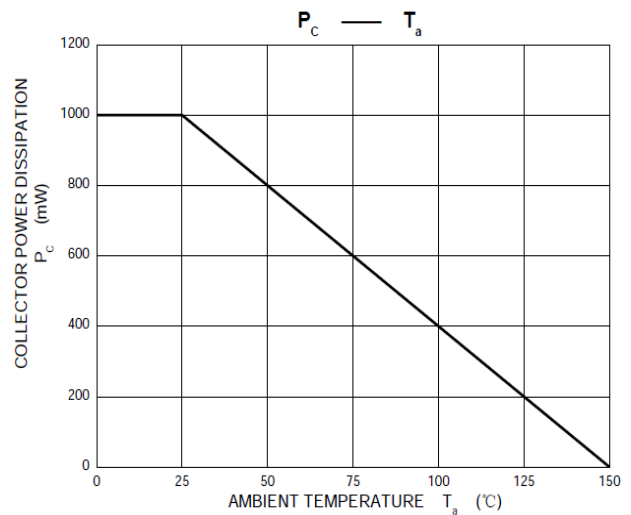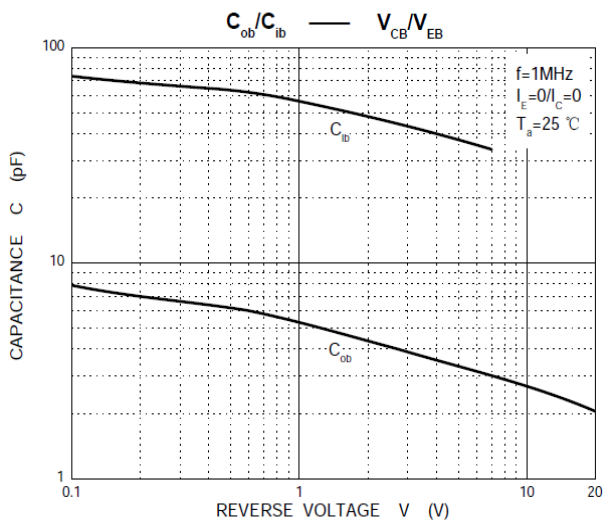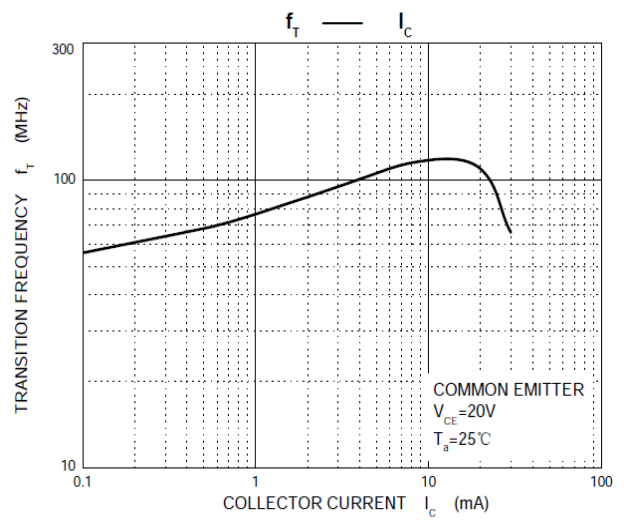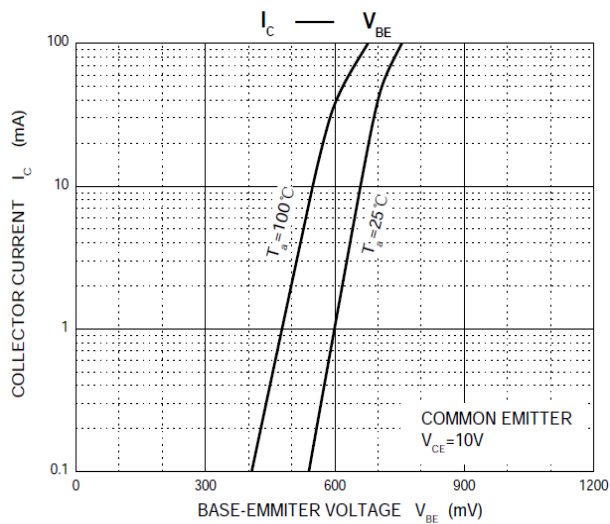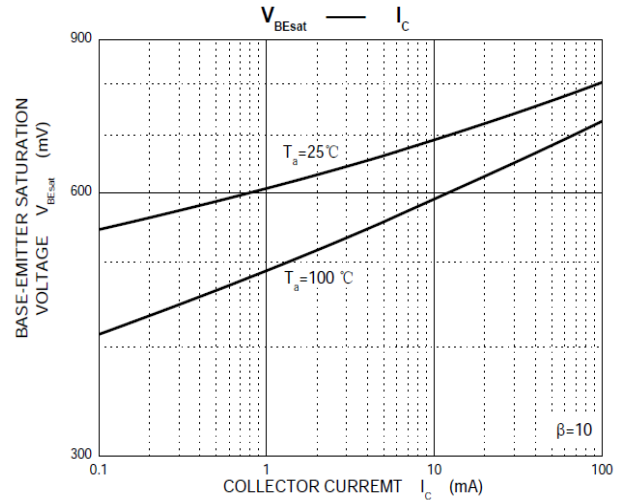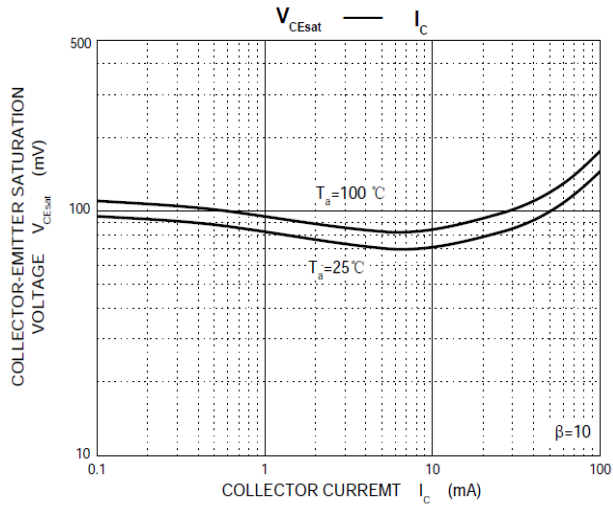


SOT-223 Package information

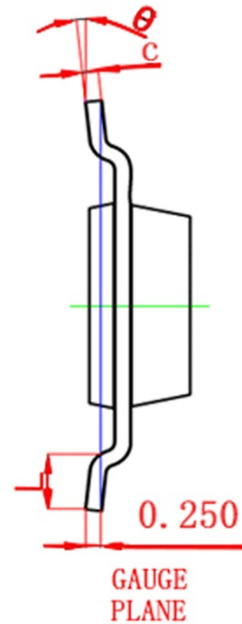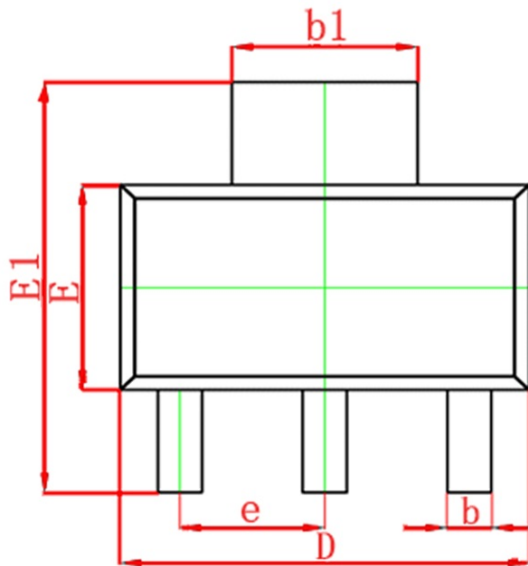

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	--	1.800	--	0.071
A1	0.020	0.100	0.001	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.840	0.026	0.033
b1	2.900	3.100	0.114	0.122
c	0.230	0.350	0.009	0.014
D	6.300	6.700	0.248	0.264
E	3.300	3.700	0.130	0.146
E1	6.700	7.300	0.264	0.287
e	2.300(BSC)		0.091(BSC)	
L	0.750	--	0.030	--
θ	0°	10°	0°	10°