

**CHIMEI INNOLUX DISPLAY**  
**CORPORATION**  
**LCD MODULE**  
**SPECIFICATION**

**Customer:** \_\_\_\_\_  
**Model Name:** Q101IRE-LA1  
**Date:** 2013/09/06  
**Version:** 1.0

Preliminary Specification  
 Final Specification

**For Customer's Acceptance**

| Approved by | Comment |
|-------------|---------|
|             |         |

| Approved by | Reviewed by | Prepared by |
|-------------|-------------|-------------|
| 鄭國偉         | 袁凌霄         | 夏彩梅         |

## Record of Revision

| Version     | Revise Date | Page | Content                        |
|-------------|-------------|------|--------------------------------|
| Pre-Spec.01 | 2012/11/16  |      | Initial Release                |
| Spec.02     | 2012/6/5    |      | Update LCM and package drawing |
| Spec 1.0    | 2013/09/06  |      | update Mechanical Drawing      |



## Contents

|   |                    |
|---|--------------------|
| 1. General Specifications .....               | 1                  |
| 2. Pin Assignment .....                       | 2                  |
| 3. Operation Specifications .....             | 4                  |
| 3.1. Absolute Maximum Ratings .....           | 4                  |
| 3.2. Typical Operation Conditions .....       | 5                  |
| 3.3. Power Sequence .....                     | 6                  |
| 3.4. LVDS Signal Timing Characteristics ..... | 7                  |
| 3.4.1. AC Electrical Characteristics .....    | 7                  |
| 3.4.2. Timing Table .....                     | 8                  |
| 3.4.3. LVDS Data Input Format .....           | 9                  |
| 4. Optical Specifications .....               | 10                 |
| 5. Reliability Test Items .....               | 14                 |
| 6. General Precautions .....                  | 15                 |
| 6.1. Safety .....                             | 15                 |
| 6.2. Handling .....                           | 15                 |
| 6.3. Static Electricity .....                 | 15                 |
| 6.4. Storage .....                            | 15                 |
| 6.5. Cleaning .....                           | 15                 |
| 7. Mechanical Drawing .....                   | 16                 |
| 8. Package Drawing .....                      | 17                 |
| 8.1. Packaging Material Table .....           | 17                 |
| 8.2. Packaging Quantity .....                 | 17                 |
| 8.3. Packaging Drawing .....                  | <b>錯誤! 尚未定義書籤。</b> |

# 1. General Specifications

| No. | Item                        | Specification                     | Remark |
|-----|-----------------------------|-----------------------------------|--------|
| 1   | LCD size                    | 10.1 inch(Diagonal)               |        |
| 2   | Driver element              | a-Si TFT active matrix            |        |
| 3   | Resolution                  | 1280 × 3(RGB) × 800               |        |
| 4   | Display mode                | Normally Black, Transmissive      |        |
| 5   | Dot pitch                   | 0.0565(W) × 0.1695(H) mm          |        |
| 6   | Active area                 | 216.96(W) × 135.60(H) mm          |        |
| 7   | Module size                 | 228.6(W) × 149.2(H) × 2.6(MAX) mm | Note 1 |
| 8   | Surface treatment           | Hard-Coating                      |        |
| 9   | Color arrangement           | RGB-stripe                        |        |
| 10  | Interface                   | Digital                           |        |
| 11  | Backlight power consumption | 3.1W (Max)                        | Note 2 |
| 12  | Panel power consumption     | 1.15W (Max)                       | Note 3 |
| 13  | Weight                      | 160g(Max)                         |        |

Note 1: Refer to Mechanical Drawing.

Note 2: Including LED Driver power consumption.

Note 3: Including T-con Board power consumption

## 2. Pin Assignment

A 40pin connector MSAK24025P40 is used for the module electronics interface.

| Pin No. | Symbol    | I/O | Function                        | Remark                    |
|---------|-----------|-----|---------------------------------|---------------------------|
| 1       | NC        | --- | No connection                   |                           |
| 2       | VDDIN     | P   | Power Supply, VDDIN=3.3V (Typ.) |                           |
| 3       | VDDIN     | P   | Power Supply, VDDIN=3.3V (Typ.) |                           |
| 4       | VDC       | P   | Power Supply, VDC =3.3V (Typ.)  |                           |
| 5       | NC        | --- | No connection                   |                           |
| 6       | CLK EDID  | I   | CLK for EDID function use       |                           |
| 7       | DATE EDID | I   | CLK for EDID function use       |                           |
| 8       | Rin0-     | I   | LVDS Negative data signal(-)    | R0-R5, G0                 |
| 9       | Rin0+     | I   | LVDS Positive data signal(+)    |                           |
| 10      | GND       | P   | Ground                          |                           |
| 11      | Rin1-     | I   | LVDS Negative data signal(-)    | G1~G5, B0,B1              |
| 12      | Rin1+     | I   | LVDS Positive data signal(+)    |                           |
| 13      | GND       | P   | Ground                          |                           |
| 14      | Rin2-     | I   | LVDS Negative data signal(-)    | B2-B5,HS,VS,<br>DE        |
| 15      | Rin2+     | I   | LVDS Positive data signal(+)    |                           |
| 16      | GND       | P   | Ground                          |                           |
| 17      | LVDS_CLK- | I   | LVDS Negative CLK signal(-)     | LVDS CLK                  |
| 18      | LVDS_CLK+ | I   | LVDS Positive CLK signal(+)     |                           |
| 19      | GND       | P   | Ground                          |                           |
| 20      | RIN3-     | I   | LVDS Negative data signal(-)    | R6, R7, G6, G7,<br>B6, B7 |
| 21      | RIN3+     | I   | LVDS Positive data signal(+)    |                           |
| 22      | CE_EN     | I   | Color engine enable             | Note 1                    |
| 23      | NC        | --- | No connection                   |                           |
| 24      | NC        | --- | No connection                   |                           |
| 25      | GND       | P   | LED Ground                      |                           |
| 26      | NC        | --- | No connection                   |                           |
| 27      | NC        | --- | No connection                   |                           |


|    |         |     |                                    |        |
|----|---------|-----|------------------------------------|--------|
| 28 | GND     | P   | Ground                             |        |
| 29 | NC      | --- | No connection                      |        |
| 30 | NC      | --- | No connection                      |        |
| 31 | LED_GND | P   | LED Ground                         |        |
| 32 | LED_GND | P   | LED Ground                         |        |
| 33 | LED_GND | P   | LED Ground                         |        |
| 34 | NC      | --- | No connection                      |        |
| 35 | LED_PWM | I   | PWM Signal for LED dimming control | Note 2 |
| 36 | LED_EN  | I   | LED Enable Pin (+3V Input)         |        |
| 37 | CABC_EN | I   | CABC Enable                        | Note 1 |
| 38 | VLED    | --- | LED Power Supply VLED=3.7V         |        |
| 39 | VLED    | --- | LED Power Supply VLED=3.7V         |        |
| 40 | VLED    | --- | LED Power Supply VLED=3.7V         |        |

I: input, O: output, P: Power

Note1: The setting of Color Enhance /CABC function are as follows.

| Pin      | Enable       | Disable             |
|----------|--------------|---------------------|
| Color_EN | High Voltage | Low Voltage or open |
| CABC_EN  | High Voltage | Low Voltage or open |

Note2: LED\_PWM is used to adjust backlight brightness.

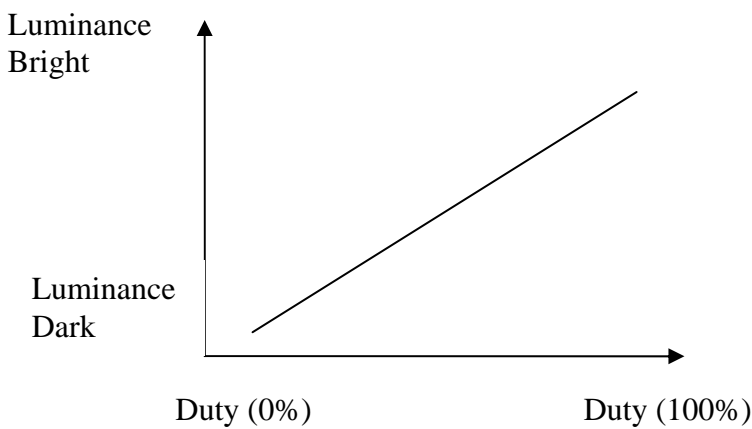

## 3. Operation Specifications

### 3.1. Absolute Maximum Ratings

(Note 1)

| Item                  | Symbol          | Values |      | Unit | Remark           |
|-----------------------|-----------------|--------|------|------|------------------|
|                       |                 | Min.   | Max. |      |                  |
| Power voltage         | VDD             | -0.3   | 5.0  | V    | VSS=0V,<br>TA=25 |
|                       | VLED            | -0.3   | 5.0  | V    |                  |
| Operation Temperature | T <sub>OP</sub> | -10    | 50   |      |                  |
| Storage Temperature   | T <sub>ST</sub> | -20    | 60   |      |                  |

Note 1: The absolute maximum rating values of this product are not allowed to be exceeded at any times. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.




## 3.2. Typical Operation Conditions

(GND=0V, TA=25 °C)


| Item                     | Symbol            | Values |      |      | Unit | Remark                  |
|--------------------------|-------------------|--------|------|------|------|-------------------------|
|                          |                   | Min.   | Typ. | Max. |      |                         |
| Power voltage            | VDD               | -      | 3.3  | -    | V    |                         |
|                          | VLED              | 3.3    | 3.7  | 4.2  | V    |                         |
| Input logic high voltage | V <sub>IH</sub>   | 3.0    | 3.3  | 3.6  | V    |                         |
| Input logic low voltage  | V <sub>IL</sub>   | 0      | -    | 0.5  | V    |                         |
| Current for Driver       | I <sub>VDD</sub>  | -      | 255  | 348  | mA   | VDD=3.3V                |
|                          | I <sub>VLED</sub> | -      | 830  | 837  | mA   | VLED=3.7V,<br>Duty=100% |
| EN Control Level         | Backlight On      | 3.0    | -    | 3.6  | V    |                         |
|                          | Backlight Off     | 0      | -    | 0.4  | V    |                         |
| PWM Control Level        | PWM High Level    | 3.0    | -    | 3.6  | V    |                         |
|                          | PWM Low Level     | 0      | -    | 0.4  | V    |                         |
| PWM Control Frequency    | f <sub>PWM</sub>  | 1K     | -    | 20K  | Hz   |                         |

### 3.3. Power Sequence

#### a. Power on:

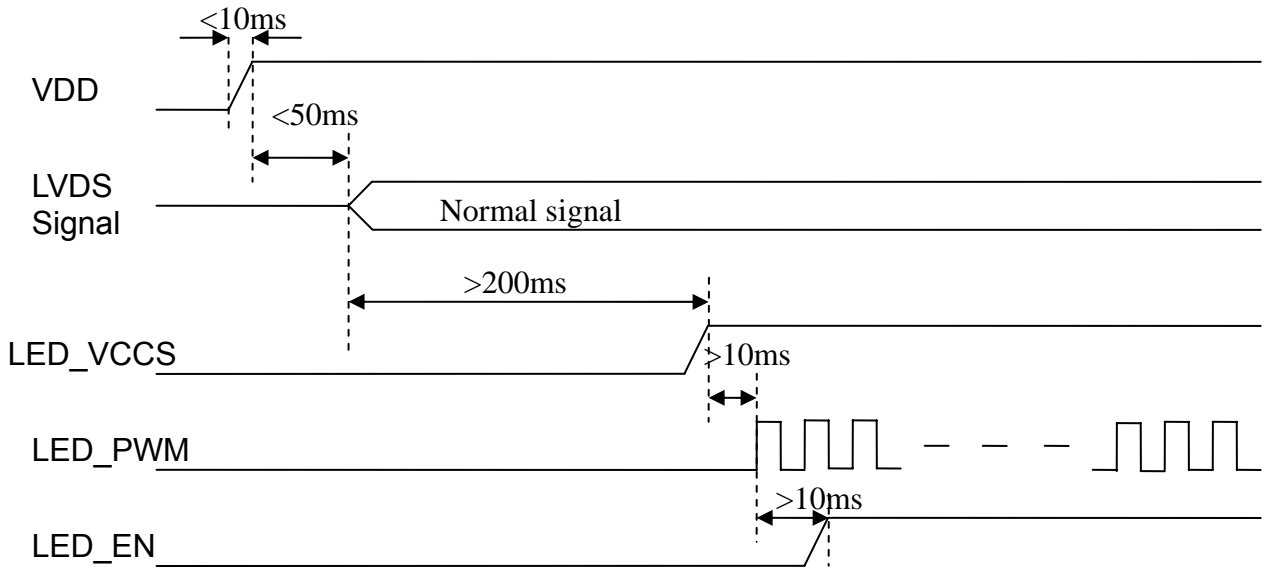


#### b. Power off:

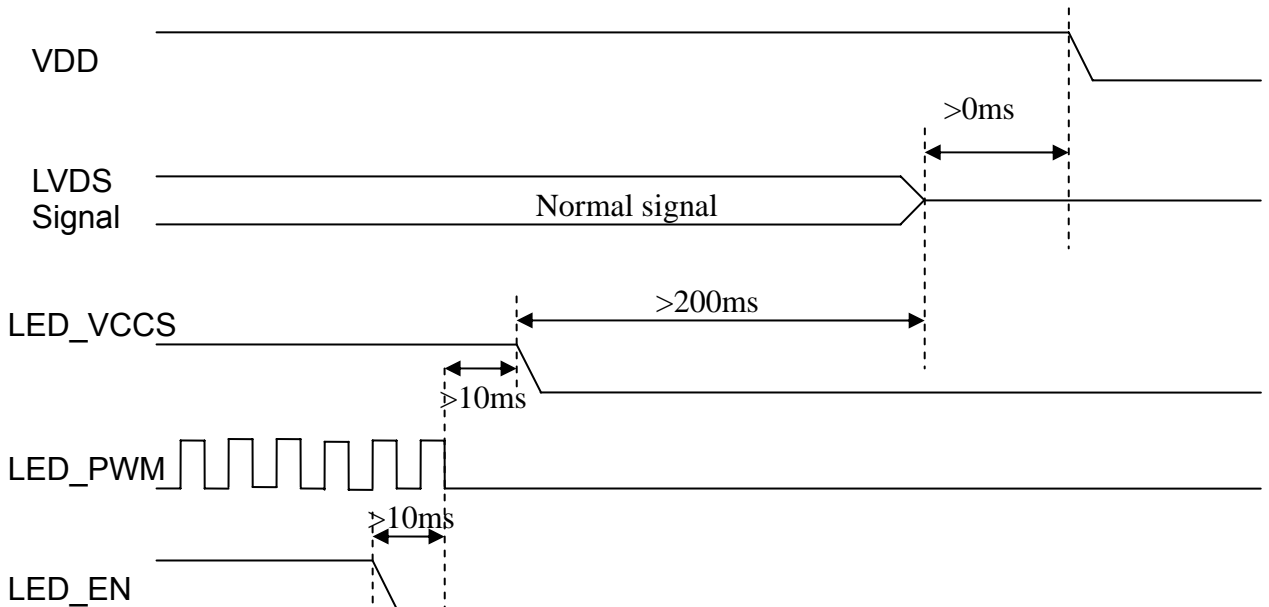

### 3.4. LVDS Signal Timing Characteristics


#### 3.4.1. AC Electrical Characteristics

| Parameter                                      | Symbol     | Values |      |      | Unit | Remark          |
|--|------------|--------|------|------|------|-----------------|
|  |            | Min.   | Typ. | Max. |      |                 |
| LVDS Differential input high Threshold voltage | $R_{xVTH}$ | -      | -    | +100 | mV   | $R_{xVCM}=1.2V$ |
| LVDS Differential input low Threshold voltage  | $R_{xVTL}$ | -100   | -    | -    | mV   |                 |
| LVDS Differential input common mode voltage    | $R_{xVCM}$ | 0.7    | -    | 1.6  | V    |                 |
| LVDS Differential voltage                      | $ V_{ID} $ | 250    | -    | 600  | mV   |                 |

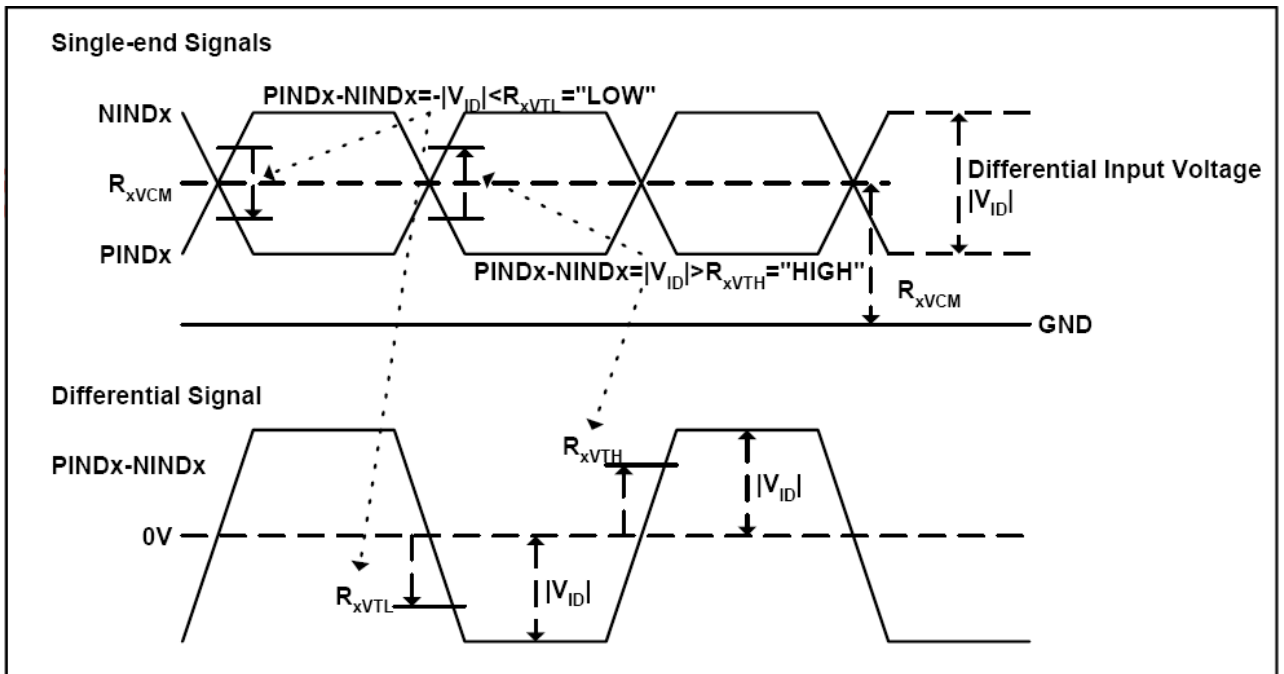


3.4.2. Timing Table

| Item                              | Symbol          | Values |      |      | Unit | Remark           |
|-----------------------------------|-----------------|--------|------|------|------|------------------|
|                                   |                 | Min.   | Typ. | Max. |      |                  |
| Clock Frequency                   | 1/Tc            | 68.9   | 71.1 | 85   | MHz  | Frame rate =60Hz |
| Horizontal display area           | tHD             | 1280   |      |      | Tc   |                  |
| HS period time                    | tH              | 1410   | 1440 | 2000 | Tc   |                  |
| HS Width +Back Porch +Front Porch | tHW+ tHBP +tHFP | 60     | 160  | 720  | Tc   |                  |
| Vertical display area             | tVD             | 800    |      |      | tH   |                  |
| VS period time                    | tv              | 815    | 823  | 1024 | tH   |                  |
| VS Width +Back Porch +Front Porch | tvW+ tvBP +tvFP | 15     | 23   | 224  | tH   |                  |

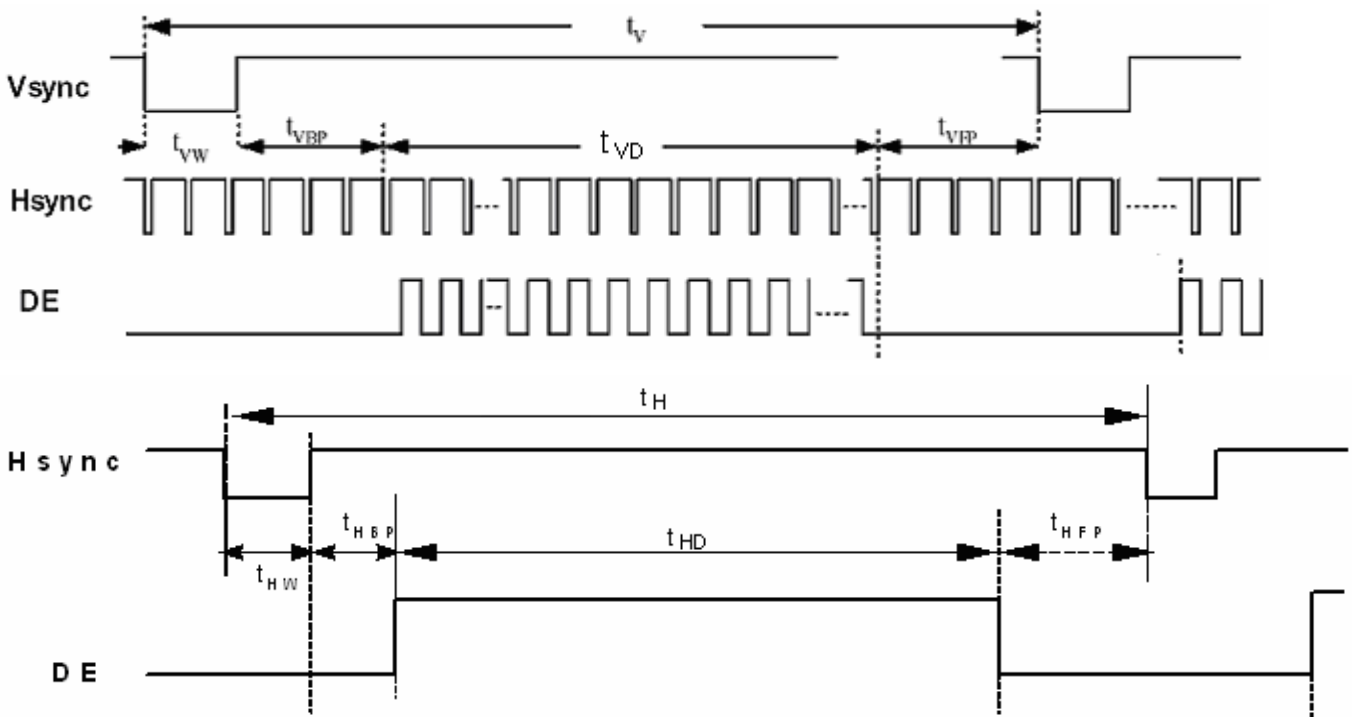

3.4.3. LVDS Data Input Format

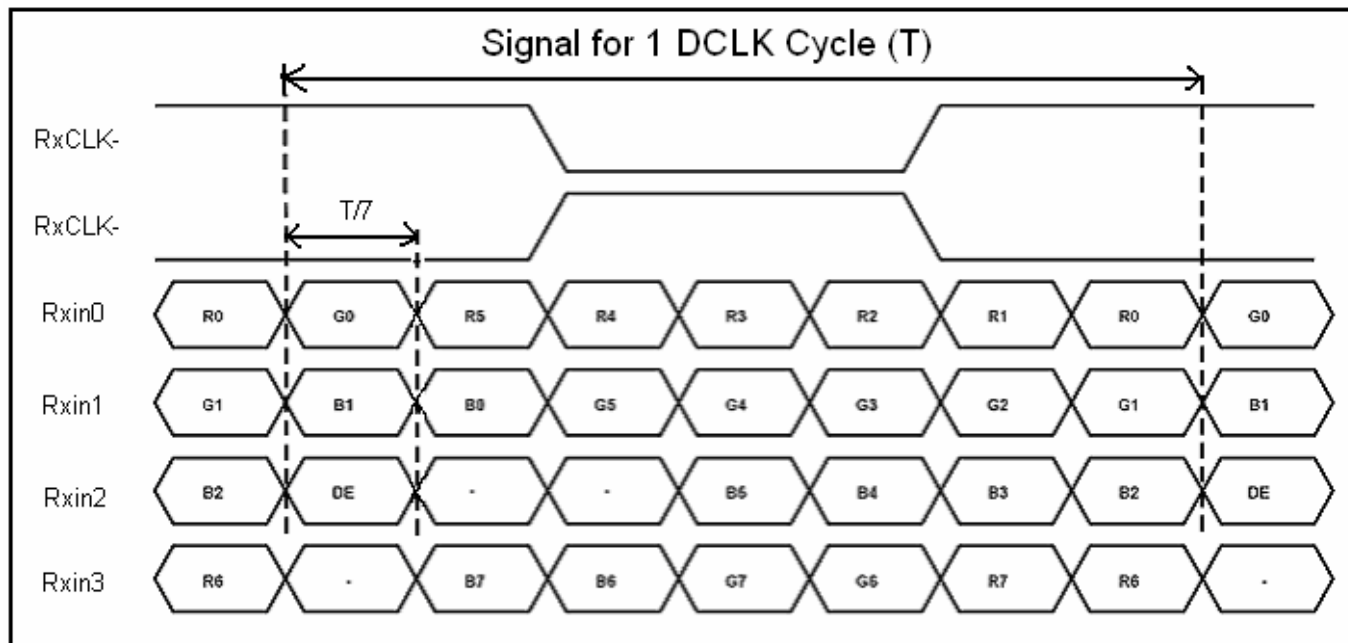

## 4. Optical Specifications

| Item                      | Symbol     | Condition                    | Values |      |      | Unit              | Remark                     |
|---------------------------|------------|------------------------------|--------|------|------|-------------------|----------------------------|
|                           |            |                              | Min.   | Typ. | Max. |                   |                            |
| Viewing angle<br>(CR≥ 10) | $\theta_L$ | $\Phi=180^\circ$ (9 o'clock) | 75     | 80   | -    | degree            | Note 1                     |
|                           | $\theta_R$ | $\Phi=0^\circ$ (3 o'clock)   | 75     | 80   | -    |                   |                            |
|                           | $\theta_T$ | $\Phi=90^\circ$ (12 o'clock) | 75     | 80   | -    |                   |                            |
|                           | $\theta_B$ | $\Phi=270^\circ$ (6 o'clock) | 75     | 80   | -    |                   |                            |
| Response time             | $T_{ON}$   | Normal<br>$=\Phi=0^\circ$    | -      | 10   | 20   | msec              | Note 3                     |
|                           | $T_{OFF}$  |                              | -      | 15   | 30   | msec              | Note 3                     |
| Contrast ratio            | CR         |                              | 600    | 800  | -    | -                 | Note 2<br>Note 4           |
| Color chromaticity        | $W_X$      |                              | 0.28   | 0.31 | 0.34 | -                 | Note 2<br>Note 5<br>Note 6 |
|                           | $W_Y$      |                              | 0.30   | 0.33 | 0.36 | -                 |                            |
| Luminance                 | L          |                              | 300    | 350  | -    | cd/m <sup>2</sup> | Note 6                     |
| Luminance uniformity      | $Y_U$      |                              | 70     | 75   | -    | %                 | Note 7                     |

### Test Conditions:

1. VDD=3.3V, VLED=3.7V, the ambient temperature is 25 .
2. The test systems refer to Note 2.

Note 1: Definition of viewing angle range

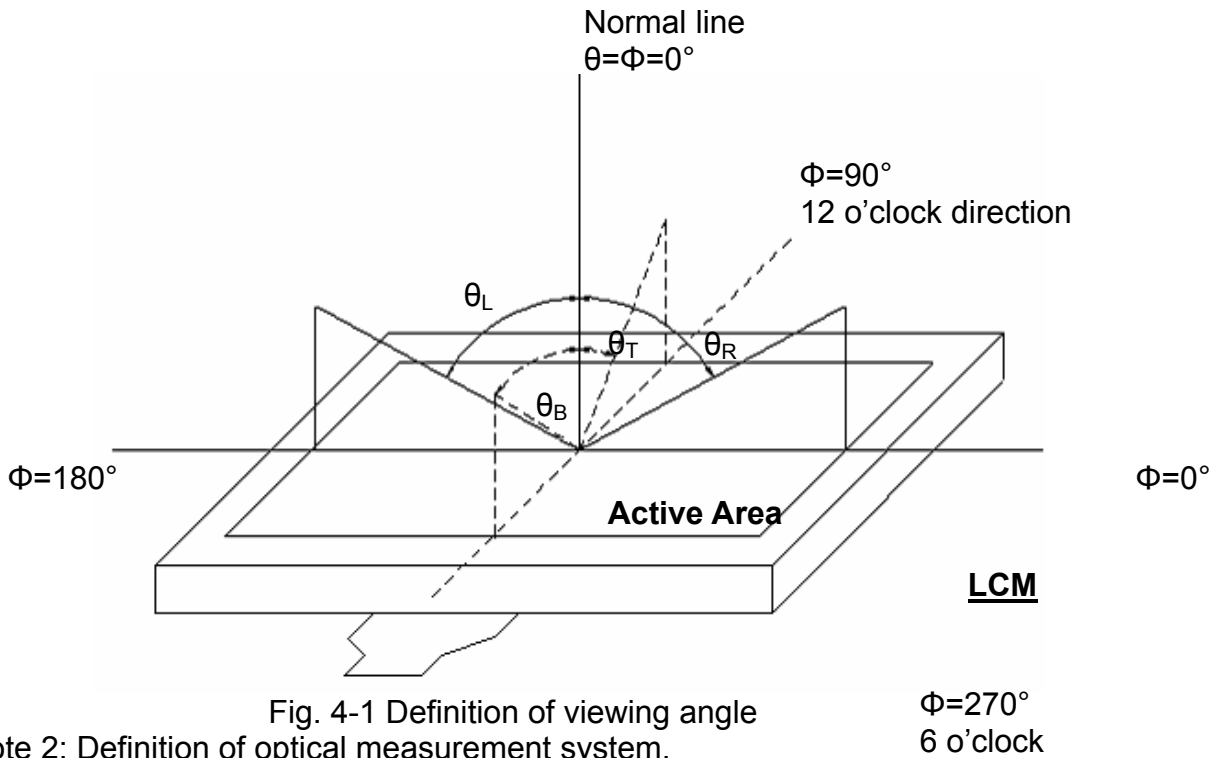


Fig. 4-1 Definition of viewing angle

Note 2: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Viewing angle is measured by ELDIM-EZ contrast/Height :1.2mm, Response time is measured by Photo detector TOPCON BM-7, other items are measured by BM-5A/ Field of view: 1° /Height: 500mm.)

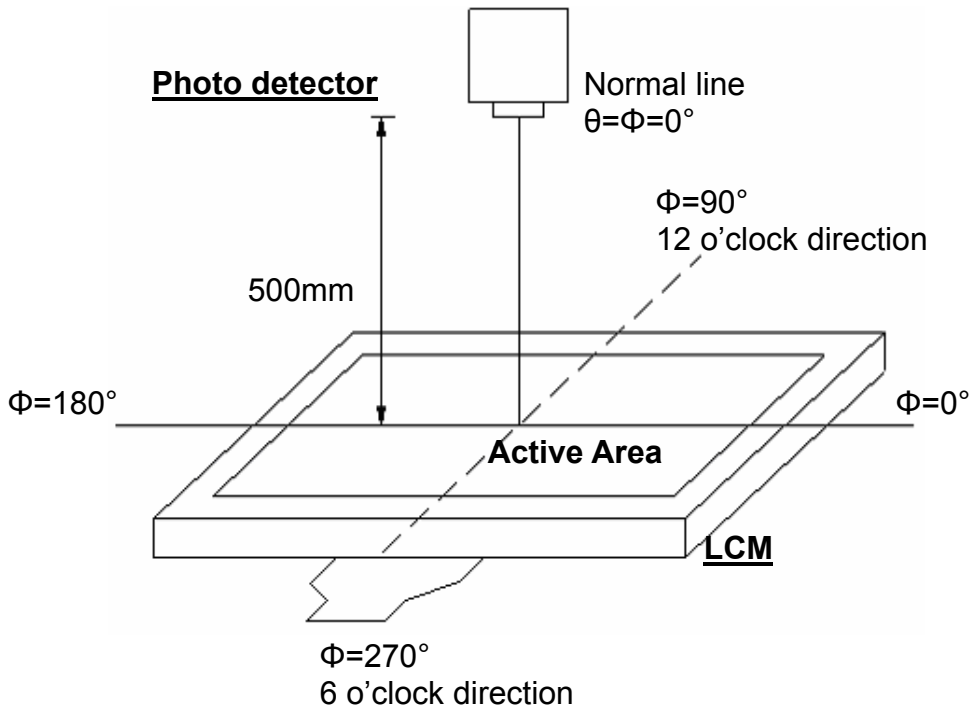


Fig. 4-2 Optical measurement system setup

Note 3: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time ( $T_{ON}$ ) is the time between photo detector output intensity changed from 90% to 10%. And fall time ( $T_{OFF}$ ) is the time between photo detector output intensity changed from 10% to 90%.

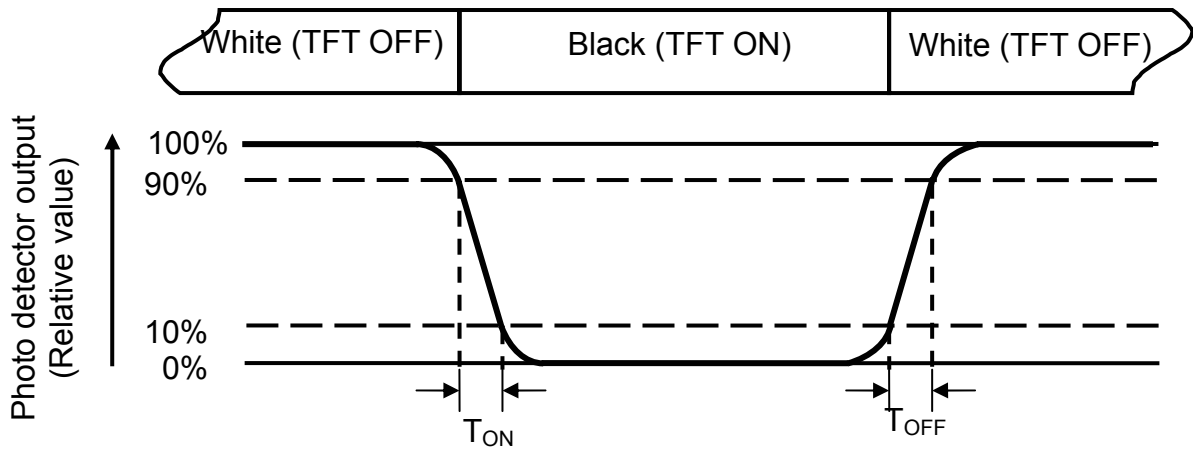


Fig. 4-3 Definition of response time

Note 4: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

The Luminance in the formula measured at center point of LCD.

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: All input terminals LCD panel must be grounded while measuring the Average of 5 points of the panel. The LED driving condition is  $I_L=240\text{mA}$ .

$$\text{The average of 5 points luminance} = (L(1) + L(2) + L(3) + L(4) + L(5)) / 5$$


The points measured refers to Notes 7



Note 7: Definition of Luminance Uniformity

Measure the luminance of gray level 63 at 9 points

$$\delta W_{9p} = \left\{ \frac{\text{Minimum} [L(1) + L(6) + L(7) + L(8) + L(9) + L(10) + L(11) + L(12) + L(13)]}{\text{Maximum} [L(1) + L(6) + L(7) + L(8) + L(9) + L(10) + L(11) + L(12) + L(13)]} \right\} * 100\%$$

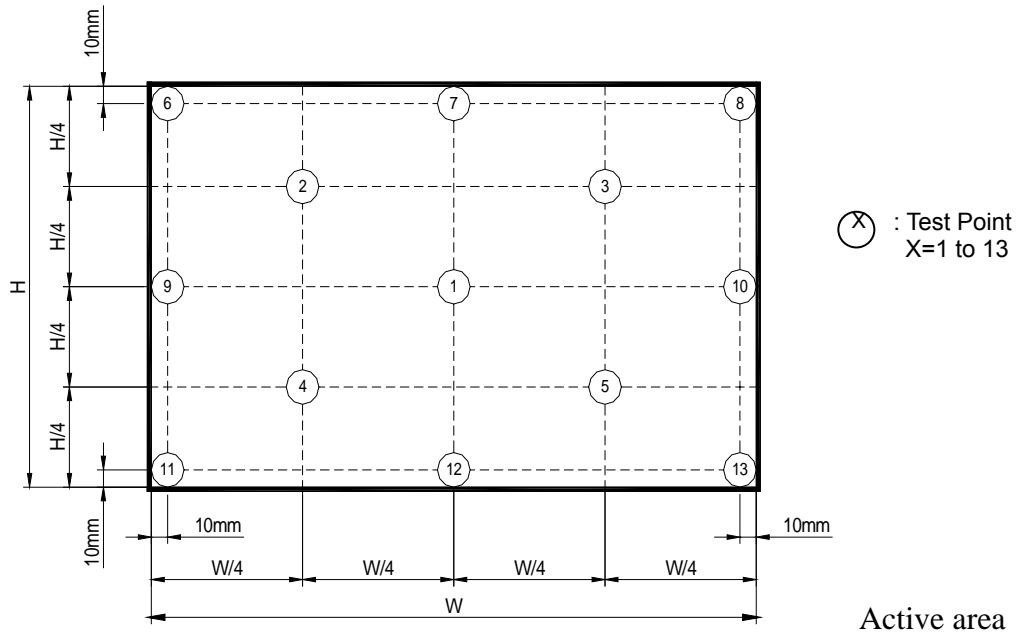

## 5. Reliability Test Items

(Note3)

| Item                                     | Test Conditions  | Remark          |
|--|--|-----------------|
| High Temperature Storage                 | Ta = 60 240hrs   | Note 1 , Note 4 |
| Low Temperature Storage                  | Ta = -20 240hrs  | Note 1 , Note 4 |
| High Temperature Operation               | Ts = 50 240hrs   | Note 2 , Note 4 |
| Low Temperature Operation                | Ta = -10 240hrs  | Note 1 , Note 4 |
| Operate at High Temperature and Humidity | +40 , 90%RH 240hrs   | Note 4          |
| Thermal Shock                            | -20 /30 min ~ +60 /30 min for a total 100 cycles, Start with cold temperature and end with high temperature.   | Note 4          |
| Vibration Test                           | ISTA-3A 1Hz~200Hz, Grms=0.53 Half hours for direction of Z.  |                 |
| Mechanical Shock                         | 100G 6ms, ±X, ±Y, ±Z 3 times for each direction  |                 |
| Electro Static Discharge                 | C=150pF, R=300 , 8point/Panel<br>Contact: ± 4KV, 5times, Human Body Mode<br>Air : ± 8KV, 5times, Human Body Mode<br>(Environment : 15 ~35 , 30%~60%) |                 |

Note 1: Ta is the ambient temperature of samples.

Note 2: Ts is the temperature of panel's surface.

Note 3: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product only guarantees operation, but don't guarantee all of the cosmetic specification.

Note 4: Before cosmetic and function test, the product must have enough recovery time, at least 2 hours at room temperature.

## 6. General Precautions

### 6.1. Safety

Liquid crystal is poisonous. Do not put it in your mouth. If liquid crystal touches your skin or clothes, wash it off immediately by using soap and water.

### 6.2. Handling

1. The LCD panel is plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
2. The polarizer attached to the display is easily damaged. Please handle it carefully to avoid scratch or other damages.
3. To avoid contamination on the display surface, do not touch the module surface with bare hands.
4. Keep a space so that the LCD panels do not touch other components.
5. Put cover board such as acrylic board on the surface of LCD panel to protect panel from damages.
6. Transparent electrodes may be disconnected if you use the LCD panel under environmental conditions where the condensation of dew occurs.
7. Do not leave module in direct sunlight to avoid malfunction of the ICs.

### 6.3. Static Electricity

1. Be sure to ground module before turning on power or operating module.
2. Do not apply voltage which exceeds the absolute maximum rating value.


### 6.4. Storage

1. Store the module in a dark room where must keep at  $25\pm 10$  and 65%RH or less.
2. Do not store the module in surroundings containing organic solvent or corrosive gas.
3. Store the module in an anti-electrostatic container or bag.

### 6.5. Cleaning

1. Do not wipe the polarizer with dry cloth. It might cause scratch.
2. Only use a soft cloth with IPA to wipe the polarizer, other chemicals might permanent damage to the polarizer.

# 7. Mechanical Drawing

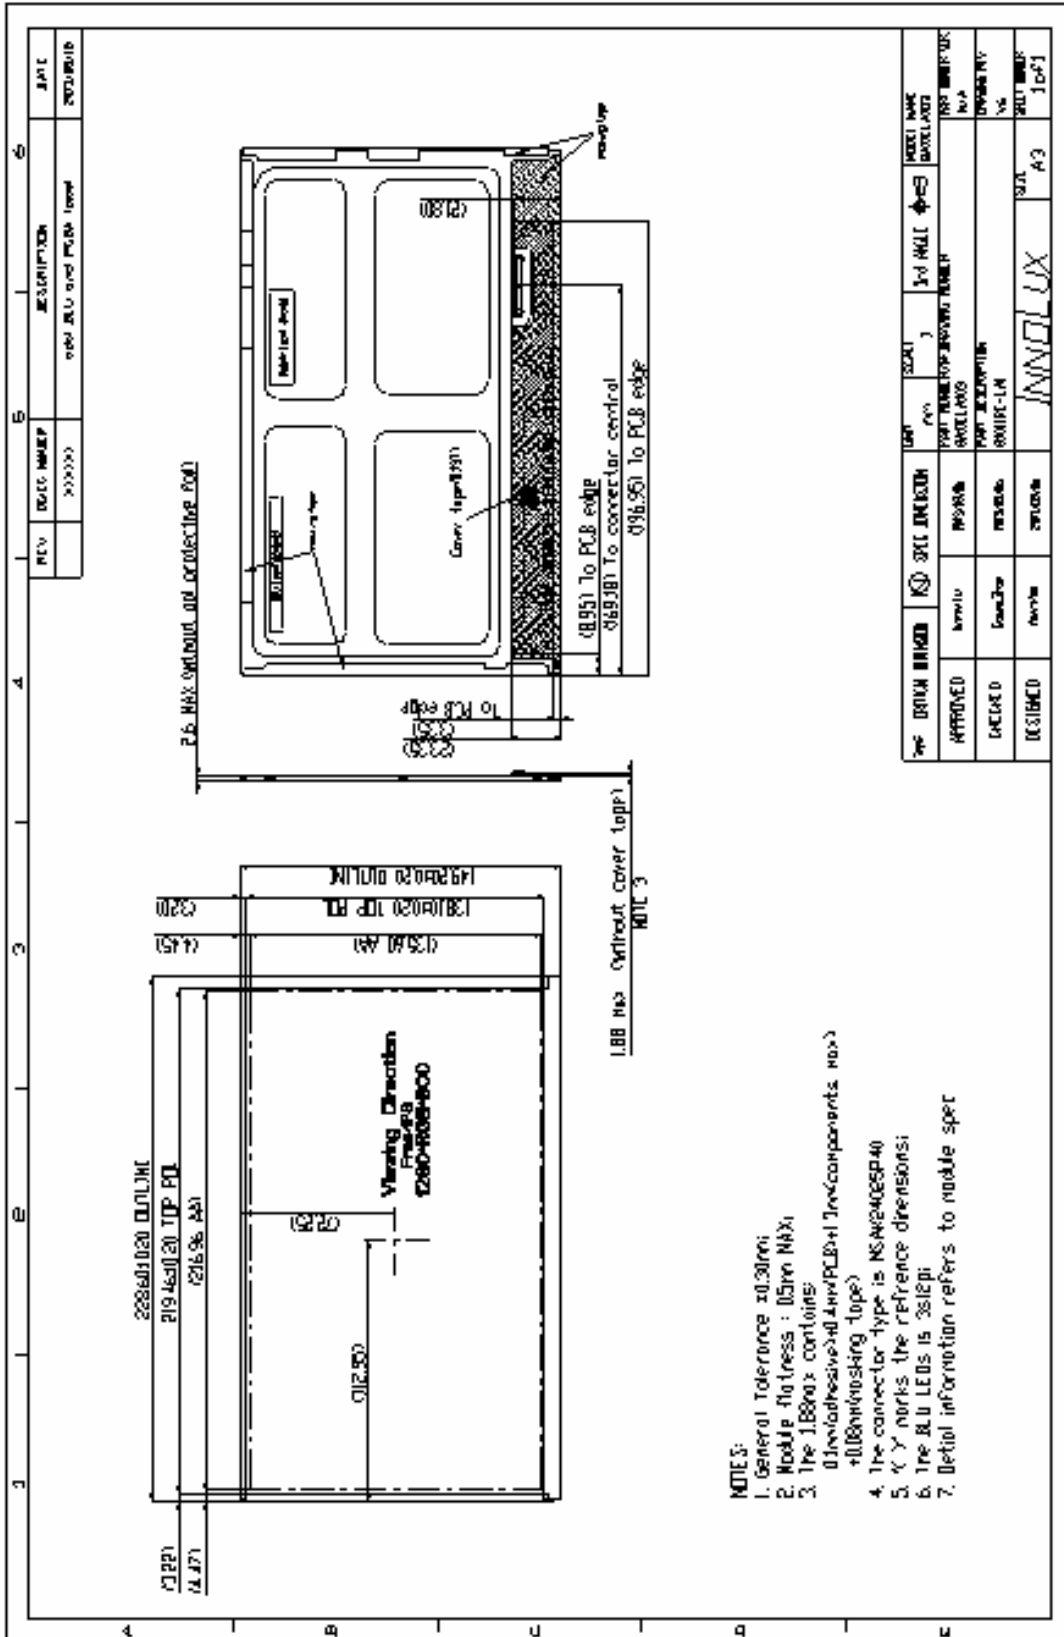

## 8. Package Drawing

### 8.1 Packaging Material Table

| No. | Item           | Model (Material)    | Dimensions(mm)    | Unit Weight (kg) | Quantity | Remark |
|-----|----------------|---------------------|-------------------|------------------|----------|--------|
| 1   | LCM Module     | HJ101IA-01I         | 228.6 X149.2X 2.6 | 0.1445           | 40pcs    |        |
| 2   | Partition      | BC Corrugated paper | 512 X 349 X 226   | 1.25             | 1set     |        |
| 3   | PET Tray       | PET                 | 511 X 342X14.6    | 0.21             | 21pcs    |        |
| 4   | Dust-Proof Bag | PE                  | 700 X 530         | 0.060            | 1pcs     |        |
| 5   | Carton         | Corrugated paper    | 530 X 355 X 255   | 1.10             | 1pcs     |        |
| 6   | Total weight   | 12.6 Kg±5%          |                   |                  |          |        |

### 8.2 Packaging Quantity

Total LCM quantity in Carton: 2pcs/Tray X 20 Trays/Carton = 40pcs

8. Packaging Drawing

