

Characteristics:


This style of relay is a tractive armature, dc current operated unit. It is specifically designed for use in lamp proving of 110VDC/33W triple pole signal lamps.

Sensitivity is achieved through a large iron circuit. A slug is also fitted to cover the transit time of its control relay.

The contacts are Silver impregnated Graphite to Silver (SIG/Sil).

The relay conforms to **BRB Spec 940A**.

The QECR2 is designed for use in lamp proving of 110VDC/12W LED signal lamps.

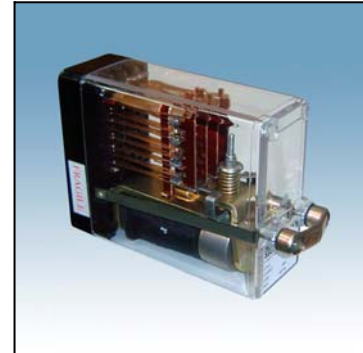

Product range:

Product code	Rated amps dc	Contacts	Coil resistance (ohms)	Max full Op. mA	Min Rel. mA	Interruption time ms at mA		Interlocking
						100	250	
QECR1-4841881	0.4	4F 4B	12.4	220	50	100	250	CFKMX
						150	350	
QECR2-4841893	0.2	4F 4B	45.5	80	55	100	132	ABDHJ

Contact Layout:

Note: Layouts shown are when viewed from the rear of the relay.

	A	B	C	D	
1	F	F	F	F	
2					
3	B	B	B	B	
4					
5					
6					
7					
8					
R1	C			C	R2
R3					R4

4F 4B

www.DataSheet4U.com

Enquiries:

All enquires for further information should be addressed to:

Selectrix Industries Pty Ltd
2 Merchant Avenue
Thomastown VIC 3074
Australia

Phone: +61 3 9466 4244
Fax: +61 3 9466 1169

Web: www.selectrix.com

Disclaimer: Selectrix Industries accepts no liability for the content of this document, or for the consequences of any actions taken on the basis of the information provided. Selectrix Industries reserves the right to alter information contained within this document without notice.