

# QSI LASER DIODE SPECIFICATIONS FOR APPROVAL

**Customer :**

**Model : QL78I6S-A/B/C**

**Signature of Approval**

**Approved by** \_\_\_\_\_

**Checked by** \_\_\_\_\_

**Issued by** \_\_\_\_\_

**Approval by Customer**

---



QSI Co., Ltd.

315-9, Cheonheung-ri, Sungger-eup,  
Cheonan-city, Chungnam, Korea 330-836

[WWW.QSILaser.com](http://WWW.QSILaser.com)

# QL78I6S-A/B/C

## AlGaAs Laser Diode

Quantum Semiconductor International Co., Ltd.

Ver. 0 2004

### ◆ OVERVIEW

QL78I6S-A/B/C is a MOCVD grown 780nm band AlGaAs laser diode with quantum well structure. It's an attractive light source, with a typical light output power of 30mW for industrial optical module and sensor application

### ◆ APPLICATION


- Sensor
- Industrial optical module

### ◆ FEATURES

- Visible Light Output :  $\lambda_p = 780 \text{ nm}$
- Optical Power Output : 30mW CW
- Package Type : TO-18 (5.6mm $\phi$ )
- Built-in Photo Diode for Monitoring Laser Diode

### ◆ ELECTRICAL CONNECTION

#### Bottom View

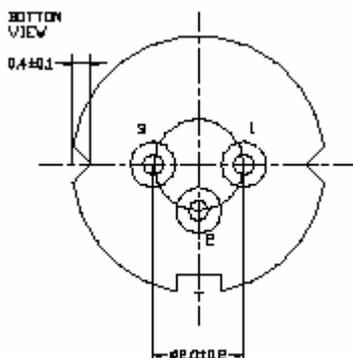

#### Pin Configuration

A	LD cathode, PD anode (Fig. 1)
B	LD , PD anode (Fig. 2)
C	LD anode, PD cathode (Fig. 3)

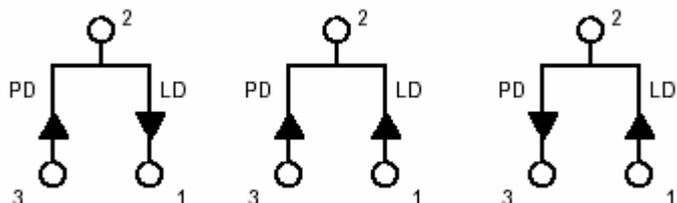


Fig. 1

QL78I6SA

Fig. 2

QL78I6SB

Fig. 3

QL78I6SC

◆ ABSOLUTE MAXIMUM RATING at Tc=25°C

Items	Symbols	Values	Unit
Optical Output Power	P	35	mW
Laser Diode Reverse Voltage	V	2	V
Photo Diode Reverse Voltage	V	30	V
Operating Temperature	Topr	-10 ~ +60	°C
Storage Temperature	Tstg	-40 ~ +85	°C

◆ ELECTRICAL and OPTICAL CHARACTERISTICS at Tc=25°C

Items	Symbols	Min.	Typ.	Max	Unit	Condition
Optical Output Power	Po	-	30	-	mW	-
Threshold Current	Ith	-	20	30	mA	-
Operating Current	Iop	-	55	75	mA	Po=30mW
Differential efficiency		0.55	0.85	1.2	mW/mA	$\frac{25\text{mW}}{I(25\text{mW})-I(5\text{mW})}$
Operating Voltage	Vop	-	2	2.6	V	Po=30mW
Lasing Wavelength	$\lambda_p$	775	785	795	nm	Po=30mW
Beam Divergence	$\theta_{  }$	7	9	12	deg	Po=30mW
	$\theta_{\perp}$	17	22	27	deg	Po=30mW
Beam Angle	$\Delta\theta_{  }$	-	-	$\pm 2.0$	deg	
	$\Delta\theta_{\perp}$	-	-	$\pm 3.0$	deg	
Monitor Current	I <sub>m</sub>	0.1	0.3	0.6	mA	Po=30mW
Optical Distance	$\Delta X, \Delta Y, \Delta Z$	-	-	$\pm 60$	$\mu\text{m}$	
Astigmatism	As	-	5	-	$\mu\text{m}$	Po=30mW

**NOTICE : QL78I6S-A/B/C to be operated on APC**

The above product specifications are subject to change without notice.





◆PACKING

