

General Description

The QM12N65B is the highest performance N-ch MOSFETs with specialized high voltage technology, which provide excellent RDSON and gate charge for most of the SPS, Charger ,Adapter and lighting applications .

The QM12N65B meet the RoHS and Green Product requirement , 100% EAS guaranteed with full function reliability approved.

Features

- Super Low Gate Charge
- Excellent CdV/dt effect decline
- 100% EAS Guaranteed
- Green Device Available

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	650	V
V_{GS}	Gate-Source Voltage	± 30	V
$I_D @ T_C = 25^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10\text{V}^1$	12	A
$I_D @ T_C = 100^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10\text{V}^1$	7	A
I_{DM}	Pulsed Drain Current ²	36	A
EAS	Single Pulse Avalanche Energy ³	90	mJ
I_{AS}	Avalanche Current	8	A
$P_D @ T_C = 25^\circ\text{C}$	Total Power Dissipation ⁴	104	W
T_{STG}	Storage Temperature Range	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-ambient (Steady State) ¹	---	62	°C/W
$R_{\theta JC}$	Thermal Resistance Junction-Case ¹	---	1.2	°C/W

Product Summary




BVDSS	RDSON	ID
650V	0.8Ω	12A

Applications

- High efficient switched mode power supplies
- Electronic lamp ballast
- LCD TV/ Monitor
- Adapter

TO263 Pin Configuration

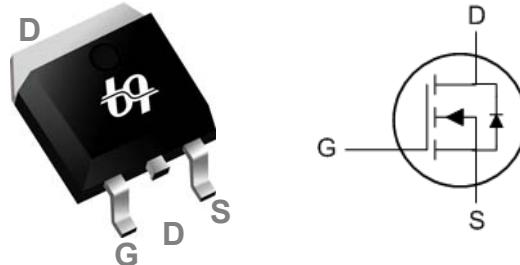

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_D=250\mu\text{A}$	650	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_D=1\text{mA}$	---	0.4	---	$\text{V}/^\circ\text{C}$
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance ²	$V_{\text{GS}}=10\text{V}$, $I_D=3.5\text{A}$	---	0.65	0.8	Ω
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$, $I_D=250\mu\text{A}$	2	---	5	V
$\Delta V_{\text{GS}(\text{th})}$	$V_{\text{GS}(\text{th})}$ Temperature Coefficient	$V_{\text{GS}}=V_{\text{DS}}$, $I_D=250\mu\text{A}$	---	-45	---	$\text{mV}/^\circ\text{C}$
I_{DSS}	Drain-Source Leakage Current	$V_{\text{DS}}=520\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	2	μA
I_{GSS}	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 30\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{\text{DS}}=15\text{V}$, $I_D=6\text{A}$	---	10	---	S
R_g	Gate Resistance	$V_{\text{DS}}=0\text{V}$, $V_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	3.2	6.4	Ω
Q_g	Total Gate Charge (10V)		---	44	---	nC
Q_{gs}	Gate-Source Charge	$V_{\text{DS}}=520\text{V}$, $V_{\text{GS}}=10\text{V}$, $I_D=1\text{A}$	---	12	---	
Q_{gd}	Gate-Drain Charge		---	12.7	---	
$T_{\text{d}(\text{on})}$	Turn-On Delay Time		---	24	---	ns
T_r	Rise Time	$V_{\text{DD}}=300\text{V}$, $V_{\text{GS}}=10\text{V}$, $R_G=10\Omega$,	---	20	---	
$T_{\text{d}(\text{off})}$	Turn-Off Delay Time	$I_D=1\text{A}$	---	74	---	
T_f	Fall Time		---	44	---	
C_{iss}	Input Capacitance		---	2402	---	pF
C_{oss}	Output Capacitance	$V_{\text{DS}}=25\text{V}$, $V_{\text{GS}}=0\text{V}$, $F=1\text{MHz}$	---	128	---	
C_{rss}	Reverse Transfer Capacitance		---	2.6	---	

Guaranteed Avalanche Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
EAS	Single Pulse Avalanche Energy ⁵	$V_{\text{DD}}=50\text{V}$, $L=1\text{mH}$, $I_{\text{AS}}=4\text{A}$	23	---	---	mJ

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current ^{1,6}	$V_G=V_D=0\text{V}$, Force Current	---	---	12	A
I_{SM}	Pulsed Source Current ^{2,6}		---	---	36	A
V_{SD}	Diode Forward Voltage ²	$V_{\text{GS}}=0\text{V}$, $I_s=1\text{A}$, $T_J=25^\circ\text{C}$	---	---	1	V
t_{rr}	Reverse Recovery Time		---	160	---	nS
Q_{rr}	Reverse Recovery Charge	$ I_F =1\text{A}$, $ dI/dt =100\text{A}/\mu\text{s}$, $T_J=25^\circ\text{C}$	---	765	---	nC

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- 3.The EAS data shows Max. rating . The test condition is $V_{\text{DD}}=50\text{V}$, $V_{\text{GS}}=10\text{V}$, $L=1\text{mH}$, $I_{\text{AS}}=8\text{A}$
- 4.The power dissipation is limited by 150°C junction temperature
- 5.The Min. value is 100% EAS tested guarantee.
- 6.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

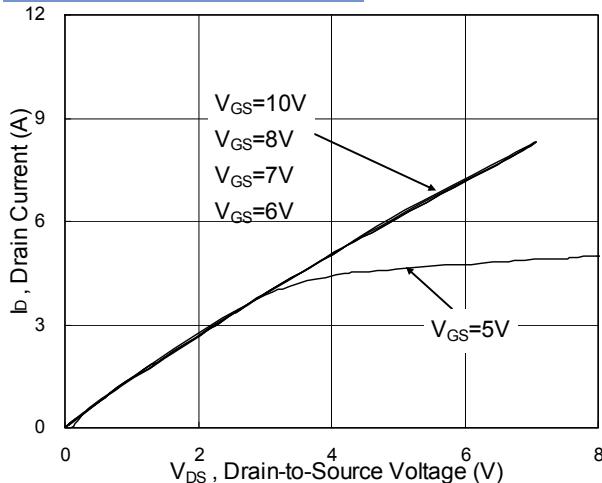


Fig.1 Typical Output Characteristics

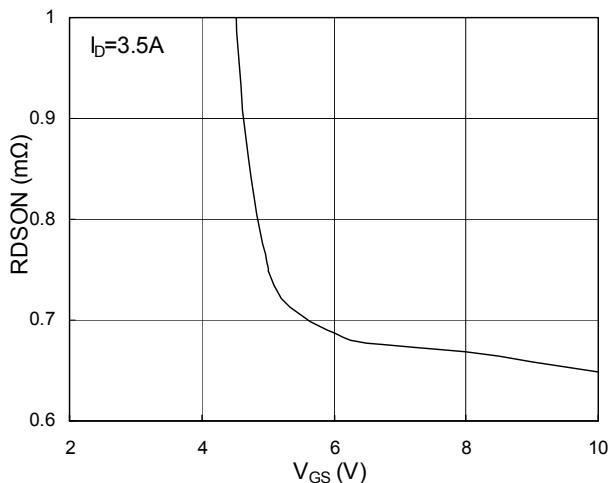


Fig.2 On-Resistance vs. G-S Voltage

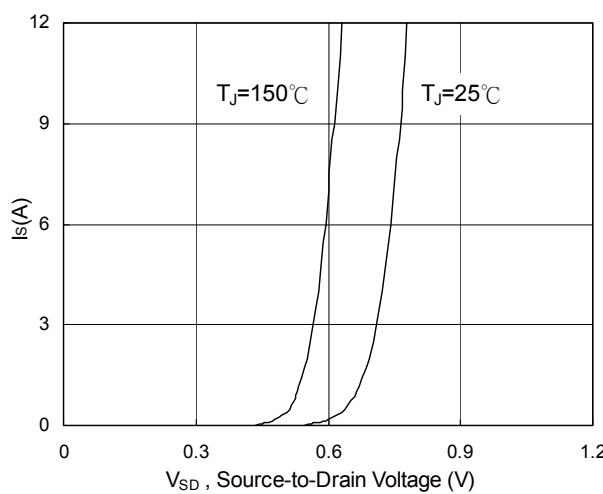


Fig.3 Forward Characteristics Of Reverse

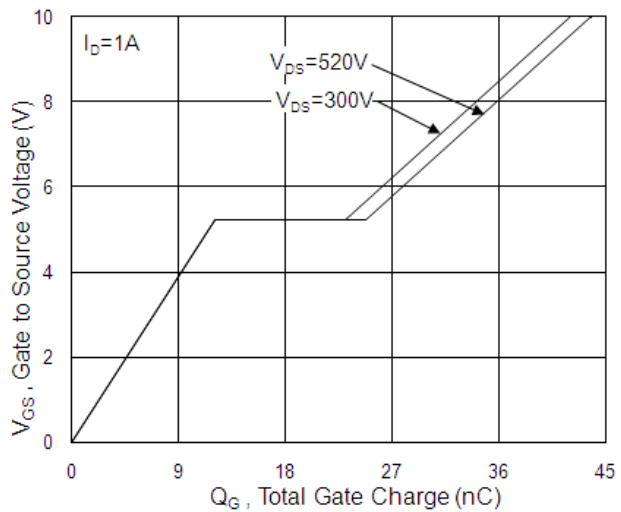


Fig.4 Gate-Charge Characteristics

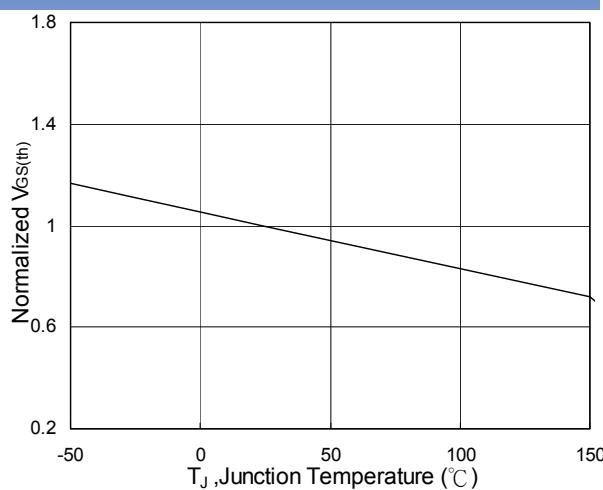


Fig.5 Normalized $V_{GS(th)}$ vs. T_J

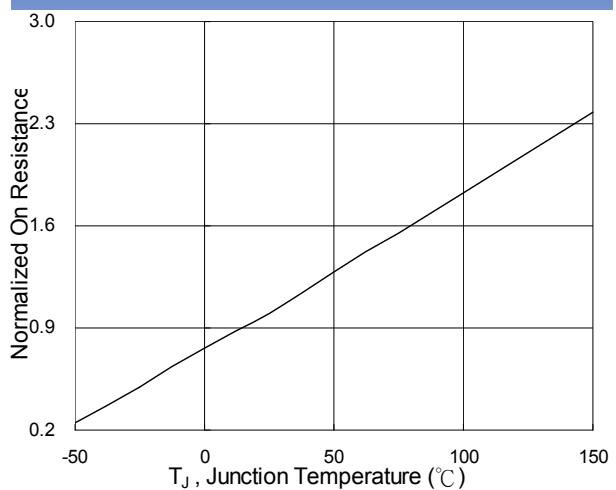
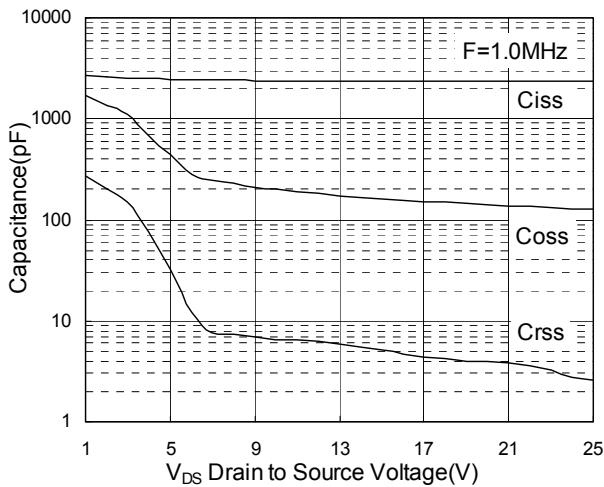
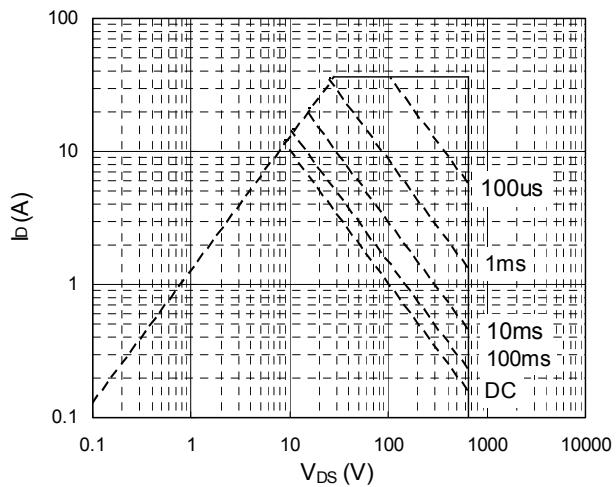
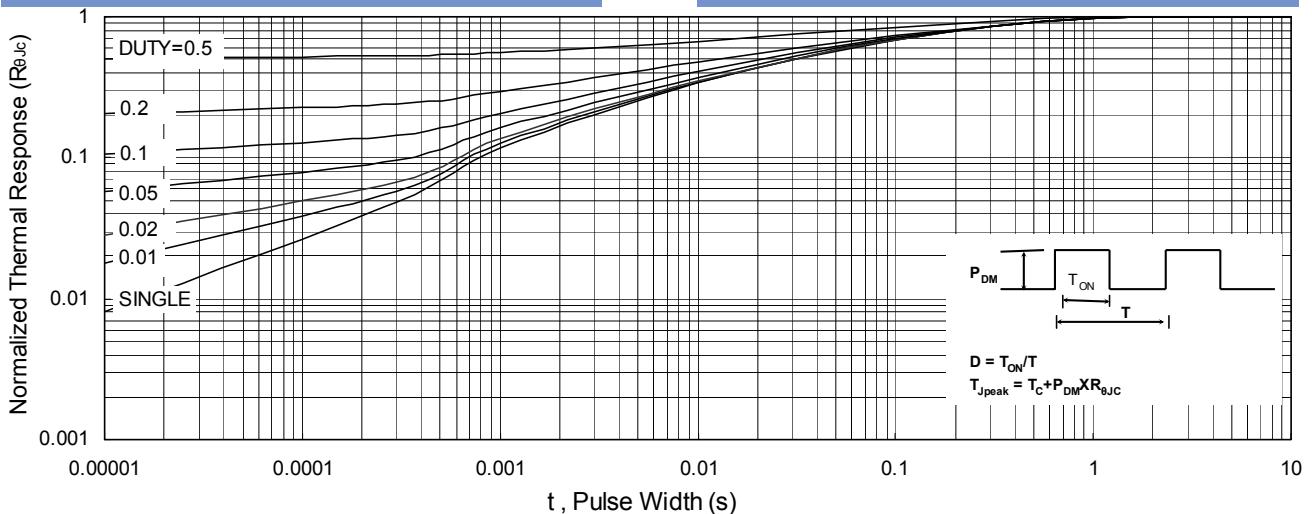
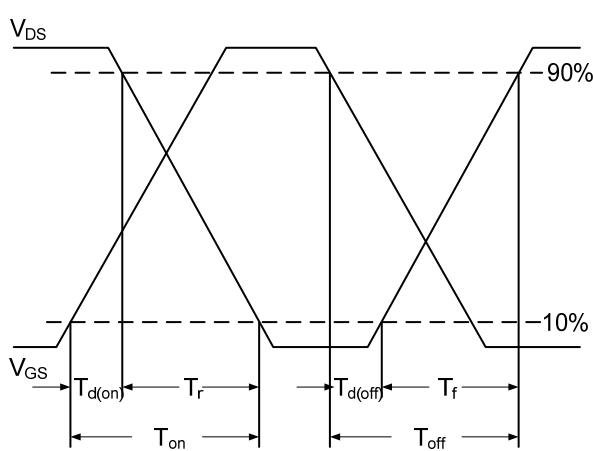
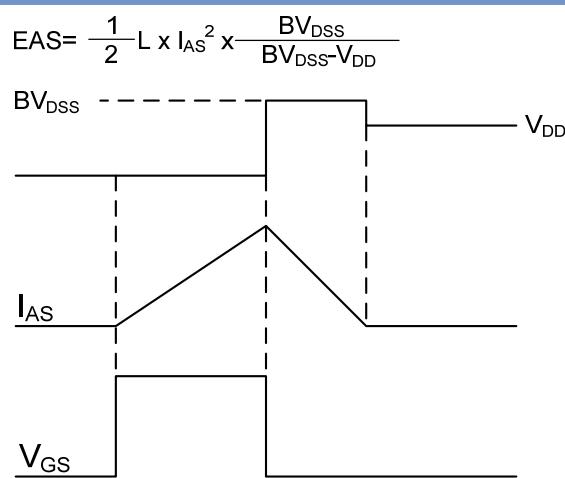


Fig.6 Normalized $R_{DS(on)}$ vs. T_J


Fig.7 Capacitance

Fig.8 Safe Operating Area

Fig.9 Normalized Maximum Transient Thermal Impedance

Fig.10 Switching Time Waveform

Fig.11 Unclamped Inductive Switching Waveform