

## General Description

The QM3016U is the highest performance trench N-ch MOSFETs with extreme high cell density , which provide excellent RDSON and gate charge for most of the synchronous buck converter applications .

The QM3016U meet the RoHS and Green Product requirement 100% EAS guaranteed with full function reliability approved.

## Features

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- 100% EAS Guaranteed
- Green Device Available

## Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	30	V
$V_{GS}$	Gate-Source Voltage	$\pm 20$	V
$I_D @ T_C = 25^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10\text{V}^1$	93	A
$I_D @ T_C = 100^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10\text{V}^1$	59	A
$I_{DM}$	Pulsed Drain Current <sup>2</sup>	190	A
EAS	Single Pulse Avalanche Energy <sup>3</sup>	317	mJ
$I_{AS}$	Avalanche Current	53.8	A
$P_D @ T_C = 25^\circ\text{C}$	Total Power Dissipation <sup>4</sup>	62.5	W
$T_{STG}$	Storage Temperature Range	-55 to 175	°C
$T_J$	Operating Junction Temperature Range	-55 to 175	°C

## Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient <sup>1</sup>	---	62	°C/W
$R_{\theta JC}$	Thermal Resistance Junction-Case <sup>1</sup>	---	2.4	°C/W

## Product Summary


**BVDSS**
**RDS(on)**
**ID**

30V

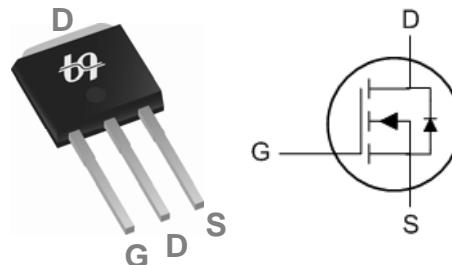
4mΩ

93A

## Applications

- High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA
- Networking DC-DC Power System
- Load Switch

## TO251 Pin Configuration



**Electrical Characteristics ( $T_J=25^\circ\text{C}$ , unless otherwise noted)**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$ , $I_D=250\mu\text{A}$	30	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	BVDSS Temperature Coefficient	Reference to $25^\circ\text{C}$ , $I_D=1\text{mA}$	---	0.0213	---	$\text{V}/^\circ\text{C}$
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance <sup>2</sup>	$V_{\text{GS}}=10\text{V}$ , $I_D=30\text{A}$	---	3.4	4	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}$ , $I_D=15\text{A}$	---	5.2	6	
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$ , $I_D=250\mu\text{A}$	1.0	1.5	2.5	V
$\Delta V_{\text{GS}(\text{th})}$	$V_{\text{GS}(\text{th})}$ Temperature Coefficient		---	-5.73	---	$\text{mV}/^\circ\text{C}$
$I_{\text{DSS}}$	Drain-Source Leakage Current	$V_{\text{DS}}=24\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $T_J=25^\circ\text{C}$	---	---	1	$\mu\text{A}$
		$V_{\text{DS}}=24\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $T_J=55^\circ\text{C}$	---	---	5	
$I_{\text{GSS}}$	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 20\text{V}$ , $V_{\text{DS}}=0\text{V}$	---	---	$\pm 100$	nA
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=5\text{V}$ , $I_D=30\text{A}$	---	26.5	---	S
$R_g$	Gate Resistance	$V_{\text{DS}}=0\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $f=1\text{MHz}$	---	1.4	2.8	$\Omega$
$Q_g$	Total Gate Charge (4.5V)	$V_{\text{DS}}=20\text{V}$ , $V_{\text{GS}}=4.5\text{V}$ , $I_D=12\text{A}$	---	31.6	---	$\text{nC}$
$Q_{\text{gs}}$	Gate-Source Charge		---	6.07	---	
$Q_{\text{gd}}$	Gate-Drain Charge		---	13.8	---	
$T_{\text{d}(\text{on})}$	Turn-On Delay Time	$V_{\text{DD}}=12\text{V}$ , $V_{\text{GS}}=10\text{V}$ , $R_G=3.3\Omega$	---	11.2	---	$\text{ns}$
$T_r$	Rise Time		---	49	---	
$T_{\text{d}(\text{off})}$	Turn-Off Delay Time		---	35	---	
$T_f$	Fall Time		---	7.8	---	
$C_{\text{iss}}$	Input Capacitance	$V_{\text{DS}}=15\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $f=1\text{MHz}$	---	3075	---	$\text{pF}$
$C_{\text{oss}}$	Output Capacitance		---	400	---	
$C_{\text{rss}}$	Reverse Transfer Capacitance		---	315	---	

**Guaranteed Avalanche Characteristics**

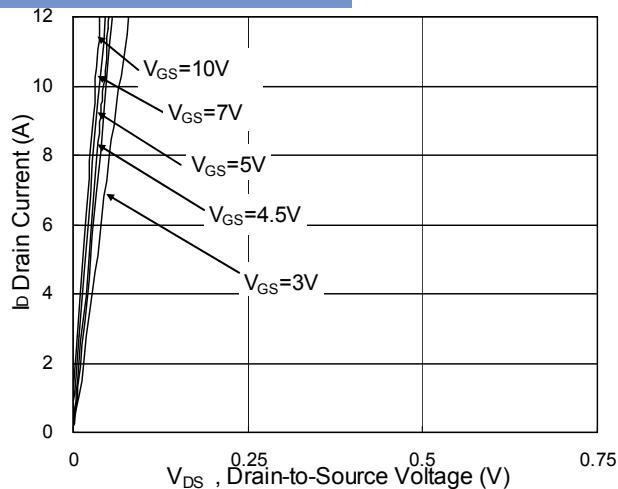
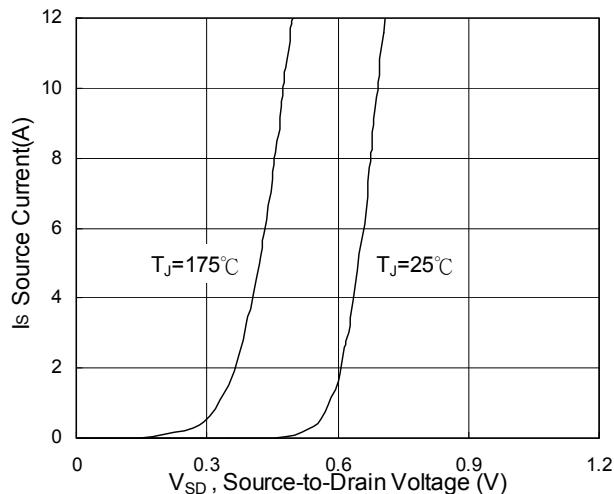
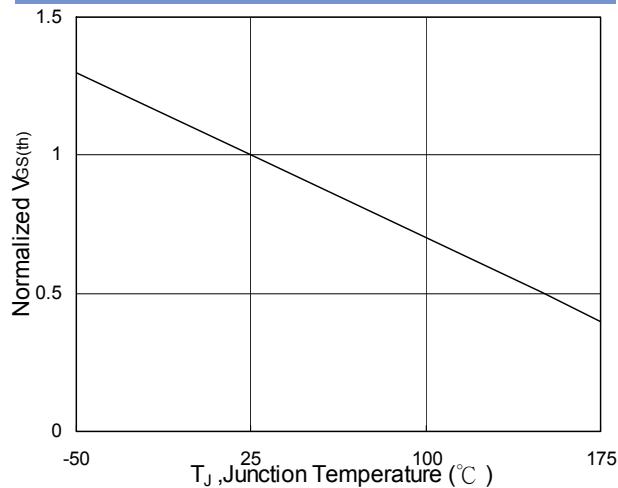
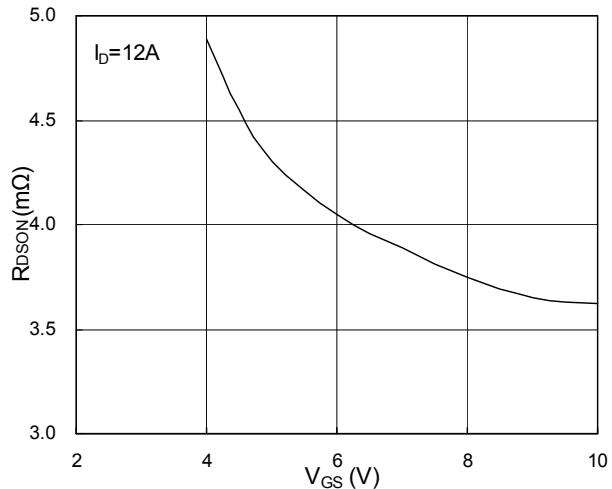
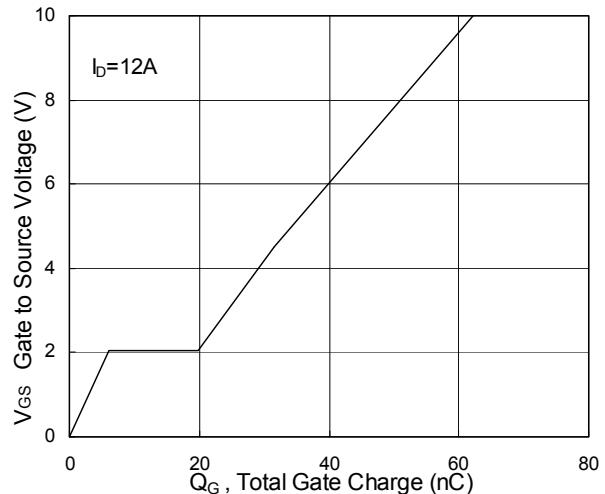
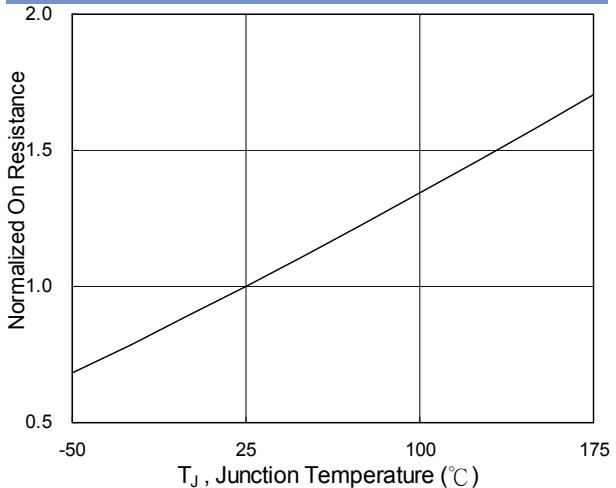
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
EAS	Single Pulse Avalanche Energy <sup>5</sup>	$V_{\text{DD}}=25\text{V}$ , $L=0.1\text{mH}$ , $I_{\text{AS}}=30\text{A}$	98	---	---	mJ

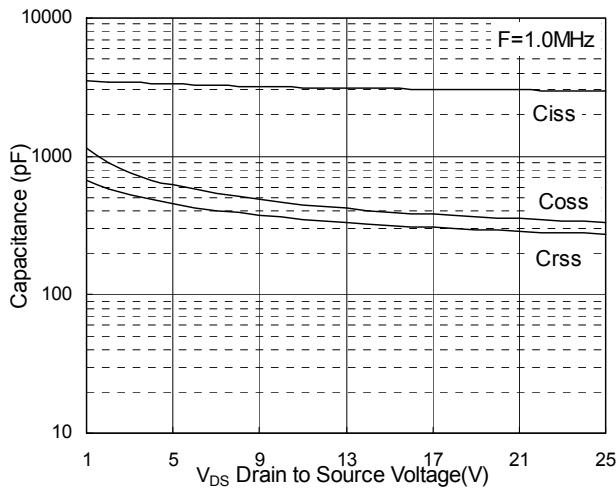
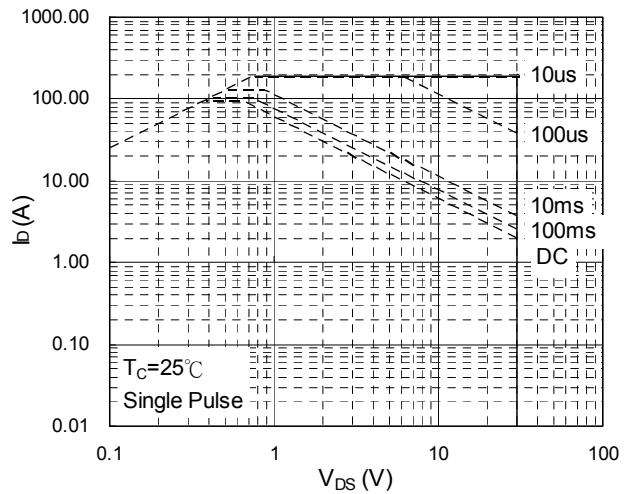
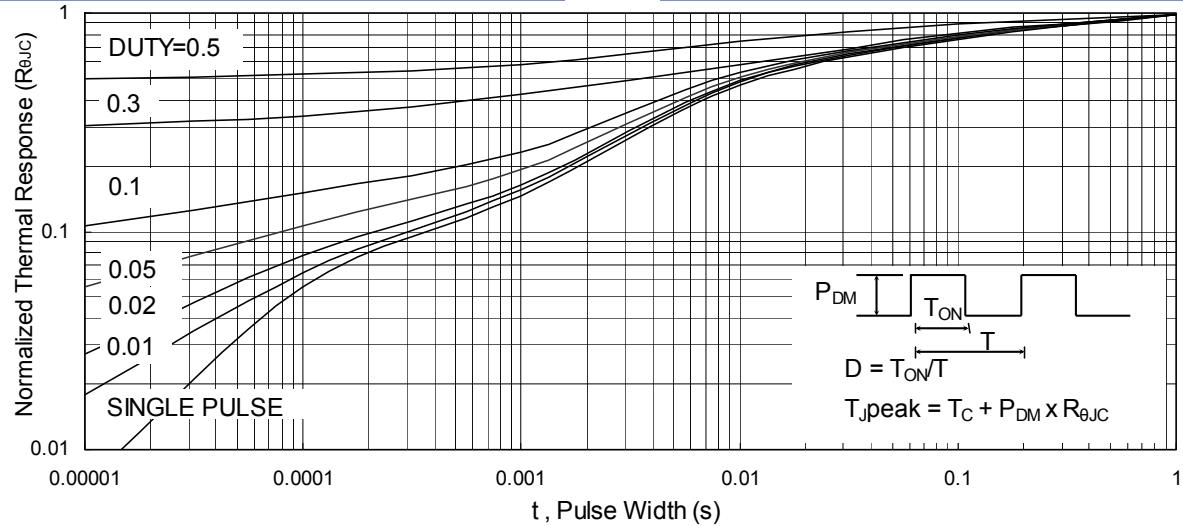
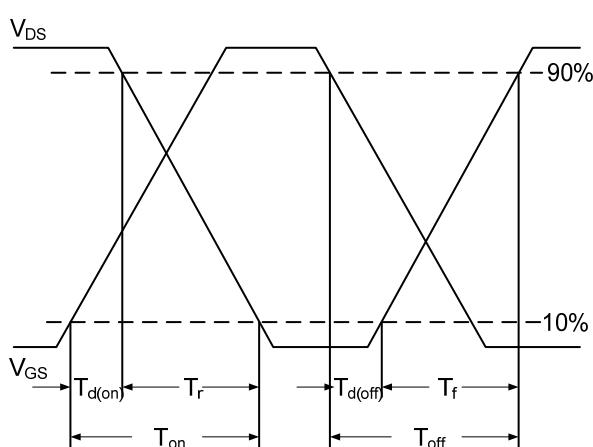
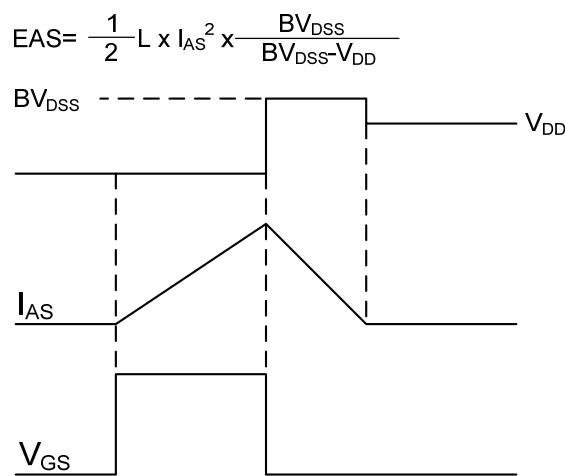
**Diode Characteristics**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$I_s$	Continuous Source Current <sup>1,6</sup>	$V_G=V_D=0\text{V}$ , Force Current	---	---	93	A
$I_{\text{SM}}$	Pulsed Source Current <sup>2,6</sup>		---	---	190	A
$V_{\text{SD}}$	Diode Forward Voltage <sup>2</sup>	$V_{\text{GS}}=0\text{V}$ , $I_s=1\text{A}$ , $T_J=25^\circ\text{C}$	---	---	1	V

Note :

1. The data tested by surface mounted on a 1 inch<sup>2</sup> FR-4 board with 2OZ copper.
2. The data tested by pulsed , pulse width  $\leq 300\mu\text{s}$  , duty cycle  $\leq 2\%$
3. The EAS data shows Max. rating . The test condition is  $V_{\text{DD}}=25\text{V}$ ,  $V_{\text{GS}}=10\text{V}$ ,  $L=0.1\text{mH}$ ,  $I_{\text{AS}}=53.8\text{A}$
4. The power dissipation is limited by  $175^\circ\text{C}$  junction temperature
5. The Min. value is 100% EAS tested guarantee.
6. The data is theoretically the same as  $I_D$  and  $I_{\text{DM}}$  , in real applications , should be limited by total power dissipation.

**Typical Characteristics**

**Fig.1 Typical Output Characteristics**

**Fig.3 Forward Characteristics of Reverse**

**Fig.5 Normalized  $V_{GS(th)}$  vs.  $T_J$** 

**Fig.2 On-Resistance vs. G-S Voltage**

**Fig.4 Gate-charge Characteristics**

**Fig.6 Normalized  $R_{DS(on)}$  vs.  $T_J$**

**N-Ch 30V Fast Switching MOSFETs**

**Fig.7 Capacitance**

**Fig.8 Safe Operating Area**

**Fig.9 Normalized Maximum Transient Thermal Impedance**

**Fig.10 Switching Time Waveform**

**Fig.11 Unclamped Inductive Switching Wave**