

**Dual N-Ch 30V Fast Switching MOSFETs**
**General Description**

The QM3214S is the highest performance trench N-ch MOSFETs with extreme high cell density , which provide excellent RDSON and gate charge for most of the synchronous buck converter applications .

The QM3214S meet the RoHS and Green Product requirement 100% EAS guaranteed with full function reliability approved.

**Features**

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- 100% EAS Guaranteed
- Green Device Available

**Absolute Maximum Ratings**

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	30	V
$V_{GS}$	Gate-Source Voltage	$\pm 20$	V
$I_D @ T_A=25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^1$	9	A
$I_D @ T_A=70^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^1$	7	A
$I_{DM}$	Pulsed Drain Current <sup>2</sup>	36	A
EAS	Single Pulse Avalanche Energy <sup>3</sup>	53	mJ
$I_{AS}$	Avalanche Current	22	A
$P_D @ T_A=25^\circ C$	Total Power Dissipation <sup>4</sup>	1.5	W
$T_{STG}$	Storage Temperature Range	-55 to 150	°C
$T_J$	Operating Junction Temperature Range	-55 to 150	°C

**Thermal Data**


Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient <sup>1</sup>	---	85	°C/W
$R_{\theta JC}$	Thermal Resistance Junction-Case <sup>1</sup>	---	25	°C/W

**Product Summary**


BVDSS	RDS(on)	ID
30V	12mΩ	9A

**Applications**

- High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA
- Networking DC-DC Power System
- Load Switch

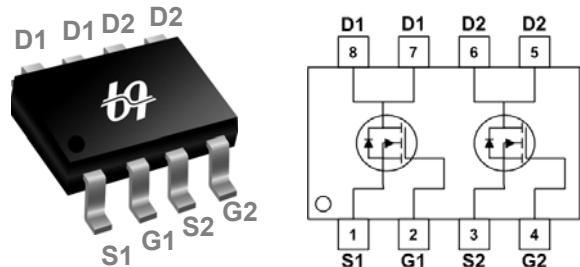**Dual SOP8 Pin Configuration**


**Dual N-Ch 30V Fast Switching MOSFETs**
**Electrical Characteristics ( $T_J=25^\circ\text{C}$ , unless otherwise noted)**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$ , $I_D=250\mu\text{A}$	30	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	BVDSS Temperature Coefficient	Reference to $25^\circ\text{C}$ , $I_D=1\text{mA}$	---	0.023	---	$\text{V}/^\circ\text{C}$
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance <sup>2</sup>	$V_{\text{GS}}=10\text{V}$ , $I_D=8\text{A}$	---	10	12	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}$ , $I_D=6\text{A}$	---	15	18	
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$ , $I_D=250\mu\text{A}$	1.2	1.5	2.5	V
$\Delta V_{\text{GS}(\text{th})}$	$V_{\text{GS}(\text{th})}$ Temperature Coefficient		---	-5.08	---	$\text{mV}/^\circ\text{C}$
$I_{\text{DSS}}$	Drain-Source Leakage Current	$V_{\text{DS}}=24\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $T_J=25^\circ\text{C}$	---	---	1	$\text{uA}$
		$V_{\text{DS}}=24\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $T_J=55^\circ\text{C}$	---	---	5	
$I_{\text{GSS}}$	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 20\text{V}$ , $V_{\text{DS}}=0\text{V}$	---	---	$\pm 100$	nA
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=5\text{V}$ , $I_D=8\text{A}$	---	24	---	S
$R_g$	Gate Resistance	$V_{\text{DS}}=0\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $f=1\text{MHz}$	---	1.8	3	$\Omega$
$Q_g$	Total Gate Charge (4.5V)	$V_{\text{DS}}=15\text{V}$ , $V_{\text{GS}}=4.5\text{V}$ , $I_D=8\text{A}$	---	9.63	13.5	$\text{nC}$
$Q_{\text{gs}}$	Gate-Source Charge		---	3.88	5.4	
$Q_{\text{gd}}$	Gate-Drain Charge		---	3.44	4.8	
$T_{\text{d}(\text{on})}$	Turn-On Delay Time	$V_{\text{DD}}=15\text{V}$ , $V_{\text{GS}}=10\text{V}$ , $R_G=1.5\Omega$	---	4.2	8.4	$\text{ns}$
$T_r$	Rise Time		---	8.2	15	
$T_{\text{d}(\text{off})}$	Turn-Off Delay Time		---	31	62	
$T_f$	Fall Time		---	4	8	
$C_{\text{iss}}$	Input Capacitance	$V_{\text{DS}}=15\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $f=1\text{MHz}$	---	940	1316	$\text{pF}$
$C_{\text{oss}}$	Output Capacitance		---	131	183	
$C_{\text{rss}}$	Reverse Transfer Capacitance		---	109	153	

**Guaranteed Avalanche Characteristics**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
EAS	Single Pulse Avalanche Energy <sup>5</sup>	$V_{\text{DD}}=25\text{V}$ , $L=0.1\text{mH}$ , $I_{\text{AS}}=15\text{A}$	24.6	---	---	mJ

**Diode Characteristics**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$I_s$	Continuous Source Current <sup>1,6</sup>	$V_G=V_D=0\text{V}$ , Force Current	---	---	9	A
			---	---	36	A
$V_{\text{SD}}$	Diode Forward Voltage <sup>2</sup>	$V_{\text{GS}}=0\text{V}$ , $I_s=1\text{A}$ , $T_J=25^\circ\text{C}$	---	---	1	V
$t_{\text{rr}}$	Reverse Recovery Time	$I_f=8\text{A}$ , $dI/dt=100\text{A}/\mu\text{s}$ , $T_J=25^\circ\text{C}$	---	8	---	$\text{nS}$
$Q_{\text{rr}}$	Reverse Recovery Charge		---	2.9	---	$\text{nC}$

Note :

- 1.The data tested by surface mounted on a 1 inch<sup>2</sup> FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width  $\leq 300\mu\text{s}$  , duty cycle  $\leq 2\%$
- 3.The EAS data shows Max. rating . The test condition is  $V_{\text{DD}}=25\text{V}$ , $V_{\text{GS}}=10\text{V}$ , $L=0.1\text{mH}$ , $I_{\text{AS}}=22\text{A}$
- 4.The power dissipation is limited by  $150^\circ\text{C}$  junction temperature
- 5.The Min. value is 100% EAS tested guarantee.
- 6.The data is theoretically the same as  $I_D$  and  $I_{\text{DM}}$  , in real applications , should be limited by total power dissipation.

### Typical Characteristics

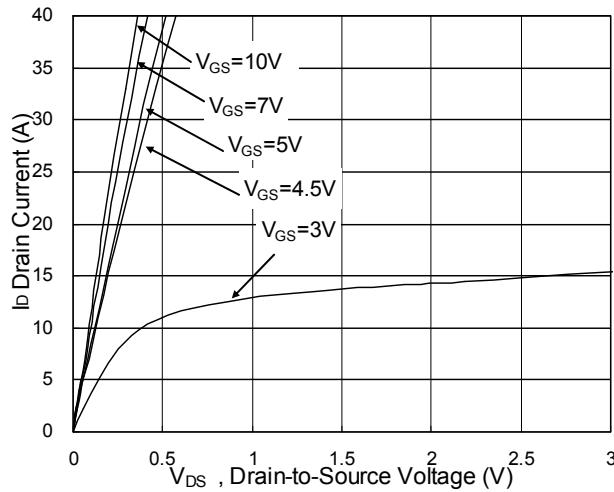


Fig.1 Typical Output Characteristics

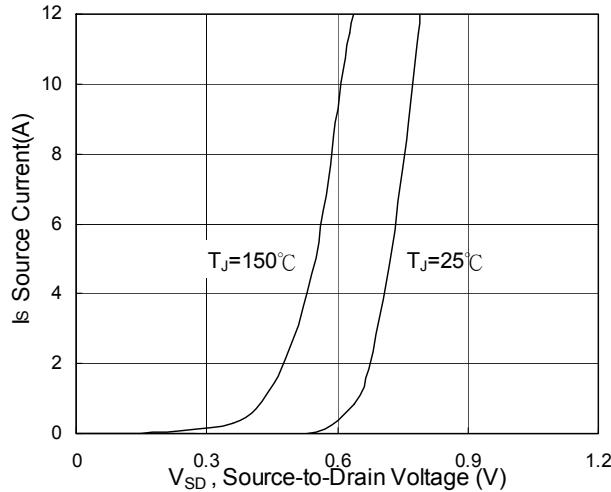


Fig.3 Forward Characteristics of Reverse

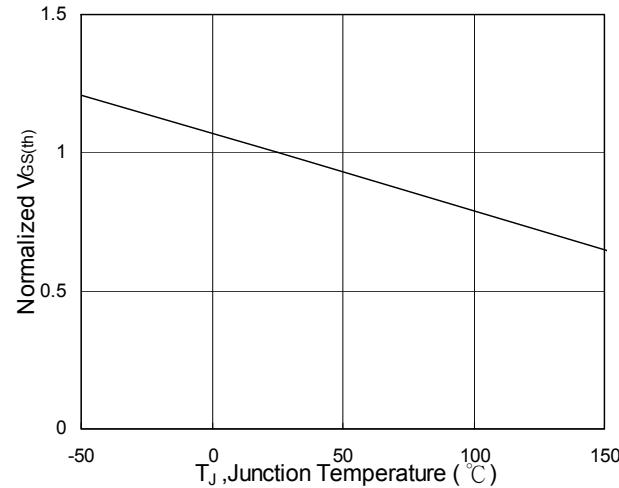


Fig.5 Normalized  $V_{GS(th)}$  vs.  $T_J$

### Dual N-Ch 30V Fast Switching MOSFETs

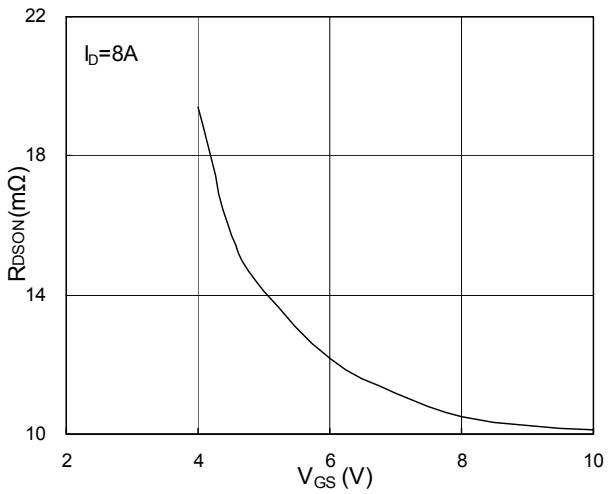


Fig.2 On-Resistance vs. G-S Voltage

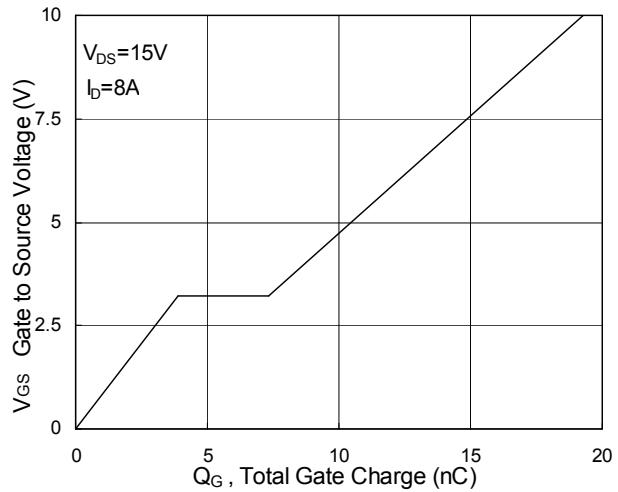


Fig.4 Gate-Charge Characteristics

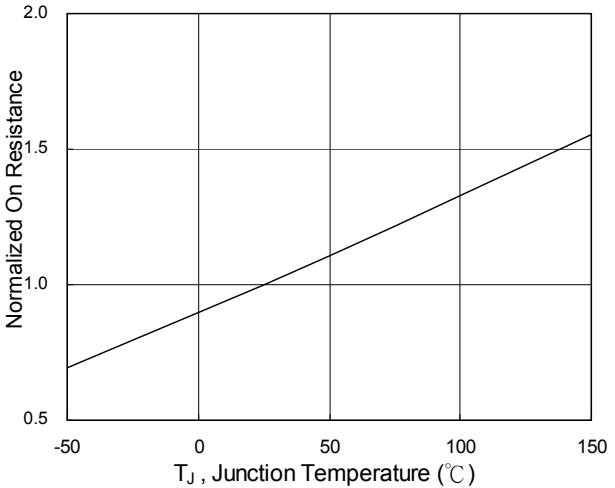
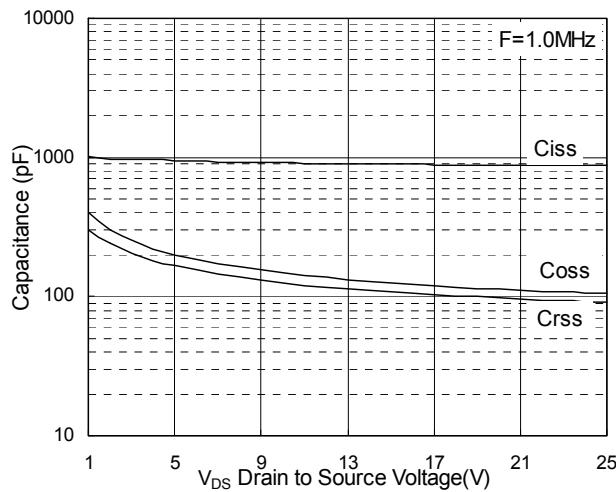
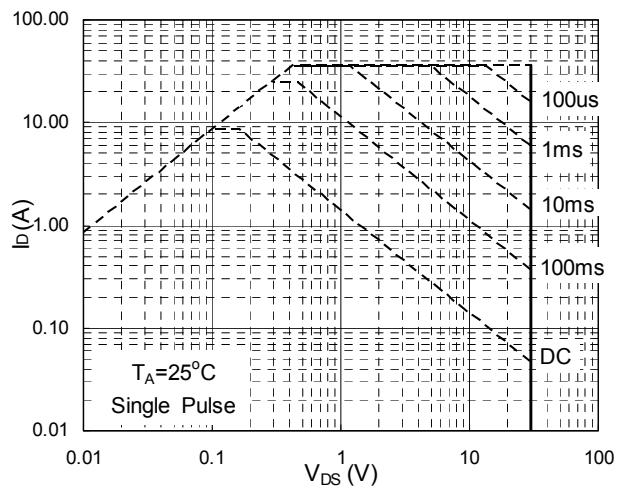
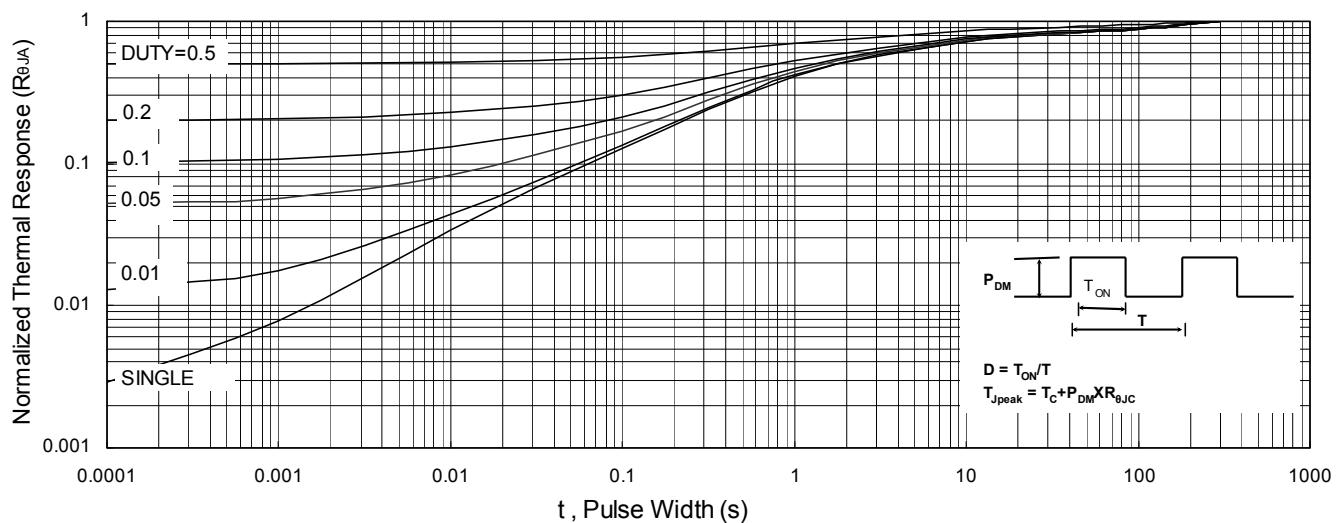
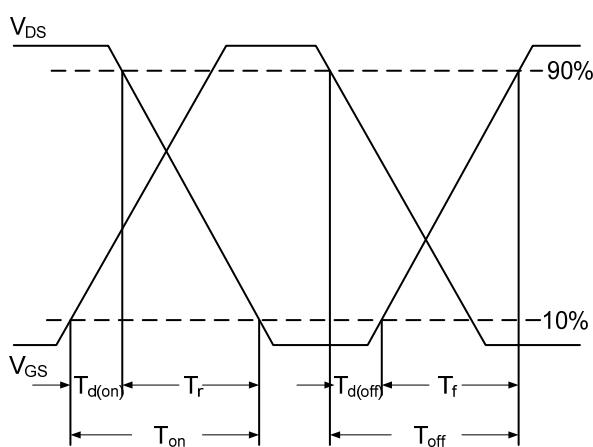
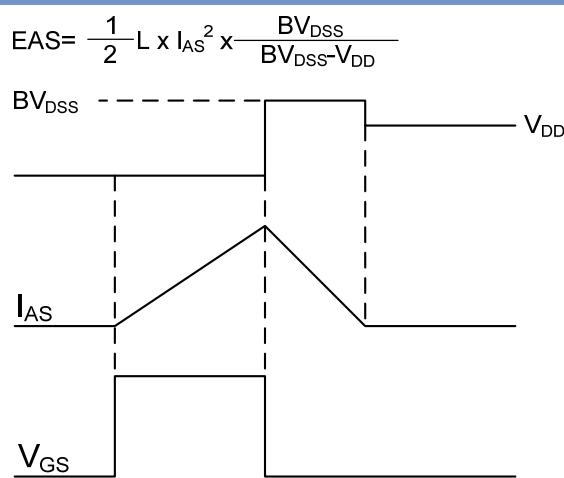


Fig.6 Normalized  $R_{DS(on)}$  vs.  $T_J$

**Dual N-Ch 30V Fast Switching MOSFETs**

**Fig.7 Capacitance**

**Fig.8 Safe Operating Area**

**Fig.9 Normalized Maximum Transient Thermal Impedance**

**Fig.10 Switching Time Waveform**

**Fig.11 Unclamped Inductive Switching Waveform**