

General Description

The QM6016P is the highest performance trench N-ch MOSFETs with extreme high cell density , which provide excellent RDSON and gate charge for most of the synchronous buck converter applications .

The QM6016P meet the RoHS and Green Product requirement , 100% EAS guaranteed with full function reliability approved.

Features

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- 100% EAS Guaranteed
- Green Device Available

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	60	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D @ T_C = 25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^1$	60	A
$I_D @ T_C = 100^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^1$	38	A
$I_D @ T_A = 25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^1$	9.2	A
$I_D @ T_A = 70^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^1$	7.5	A
I_{DM}	Pulsed Drain Current ²	165	A
EAS	Single Pulse Avalanche Energy ³	123	mJ
I_{AS}	Avalanche Current	38	A
$P_D @ T_C = 25^\circ C$	Total Power Dissipation ⁴	86.8	W
$P_D @ T_A = 25^\circ C$	Total Power Dissipation ⁴	2	W
T_{STG}	Storage Temperature Range	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient ¹	---	62	°C/W
$R_{\theta JC}$	Thermal Resistance Junction-Case ¹	---	1.44	°C/W

Product Summary


BVDSS
RDS(on)
ID

60V

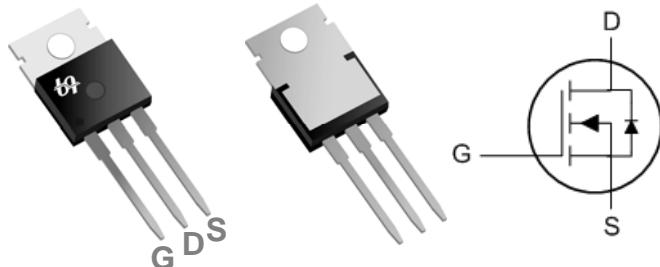
12mΩ

60A

Applications

- High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA
- Networking DC-DC Power System
- Load Switch

TO220 Pin Configuration



Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$\text{V}_{\text{GS}}=0\text{V}$, $\text{I}_D=250\mu\text{A}$	60	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $\text{I}_D=1\text{mA}$	---	0.052	---	$\text{V}/^\circ\text{C}$
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance ²	$\text{V}_{\text{GS}}=10\text{V}$, $\text{I}_D=30\text{A}$	---	10	12	$\text{m}\Omega$
		$\text{V}_{\text{GS}}=4.5\text{V}$, $\text{I}_D=15\text{A}$	---	12	15	
$\text{V}_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$\text{V}_{\text{GS}}=\text{V}_{\text{DS}}$, $\text{I}_D=250\mu\text{A}$	1.2	---	2.5	V
$\Delta \text{V}_{\text{GS}(\text{th})}$	$\text{V}_{\text{GS}(\text{th})}$ Temperature Coefficient		---	-5.76	---	$\text{mV}/^\circ\text{C}$
I_{DSS}	Drain-Source Leakage Current	$\text{V}_{\text{DS}}=48\text{V}$, $\text{V}_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	1	uA
		$\text{V}_{\text{DS}}=48\text{V}$, $\text{V}_{\text{GS}}=0\text{V}$, $T_J=55^\circ\text{C}$	---	---	5	
I_{GSS}	Gate-Source Leakage Current	$\text{V}_{\text{GS}}=\pm 20\text{V}$, $\text{V}_{\text{DS}}=0\text{V}$	---	---	± 100	nA
gfs	Forward Transconductance	$\text{V}_{\text{DS}}=5\text{V}$, $\text{I}_D=30\text{A}$	---	42	---	S
R_g	Gate Resistance	$\text{V}_{\text{DS}}=0\text{V}$, $\text{V}_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	1.5	3	Ω
Q_g	Total Gate Charge (4.5V)	$\text{V}_{\text{DS}}=48\text{V}$, $\text{V}_{\text{GS}}=4.5\text{V}$, $\text{I}_D=15\text{A}$	---	28.7	40.2	nC
Q_{gs}	Gate-Source Charge		---	10.5	14.7	
Q_{gd}	Gate-Drain Charge		---	9.9	14.0	
$\text{T}_{\text{d}(\text{on})}$	Turn-On Delay Time	$\text{V}_{\text{DD}}=30\text{V}$, $\text{V}_{\text{GS}}=10\text{V}$, $\text{R}_g=3.3\Omega$, $\text{I}_D=15\text{A}$	---	10.4	20.8	ns
T_r	Rise Time		---	9.2	16.6	
$\text{T}_{\text{d}(\text{off})}$	Turn-Off Delay Time		---	63	126	
T_f	Fall Time		---	4.8	9.6	
C_{iss}	Input Capacitance	$\text{V}_{\text{DS}}=15\text{V}$, $\text{V}_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	3240	4536	pF
C_{oss}	Output Capacitance		---	210	294	
C_{rss}	Reverse Transfer Capacitance		---	146	204	

Guaranteed Avalanche Characteristics

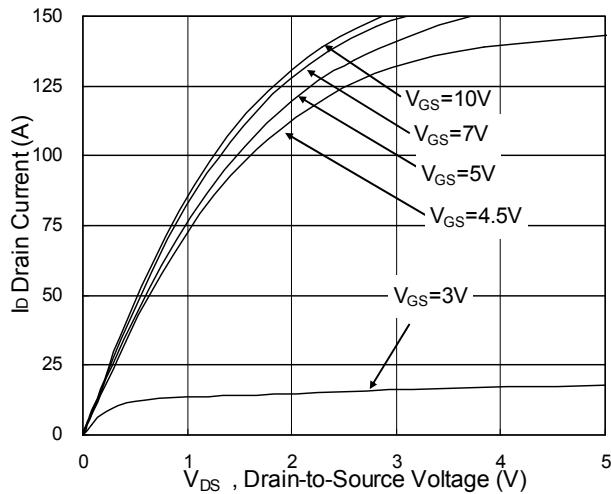
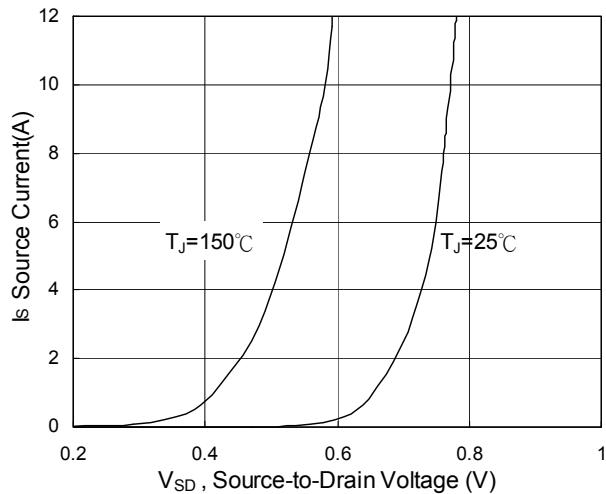
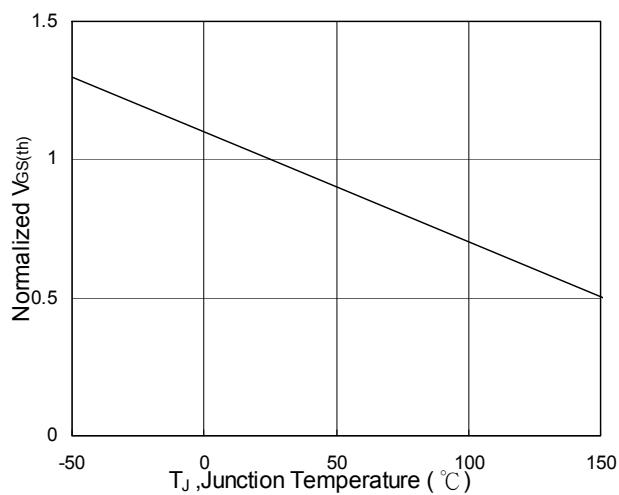
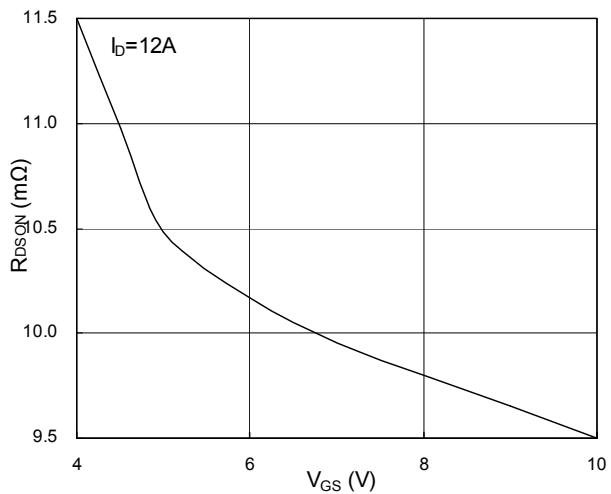
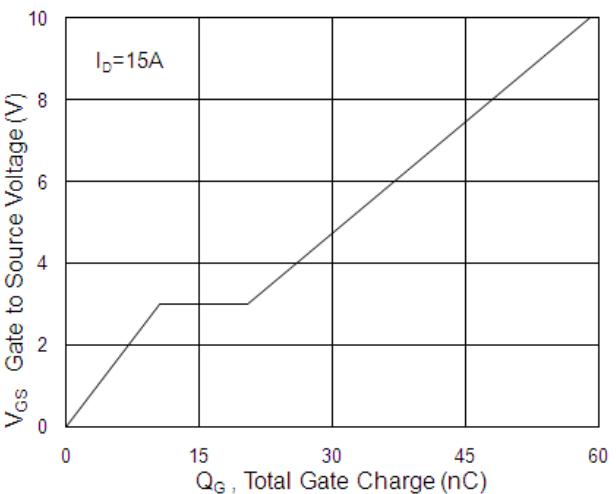
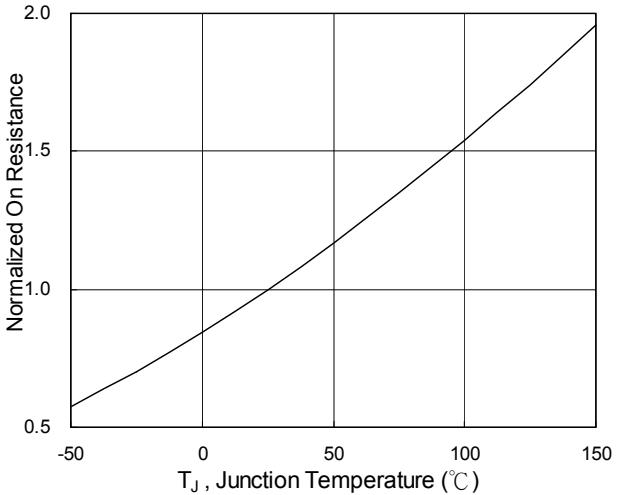
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
EAS	Single Pulse Avalanche Energy ⁵	$\text{V}_{\text{DD}}=25\text{V}$, $L=0.1\text{mH}$, $\text{I}_{\text{AS}}=30\text{A}$	77	---	---	mJ

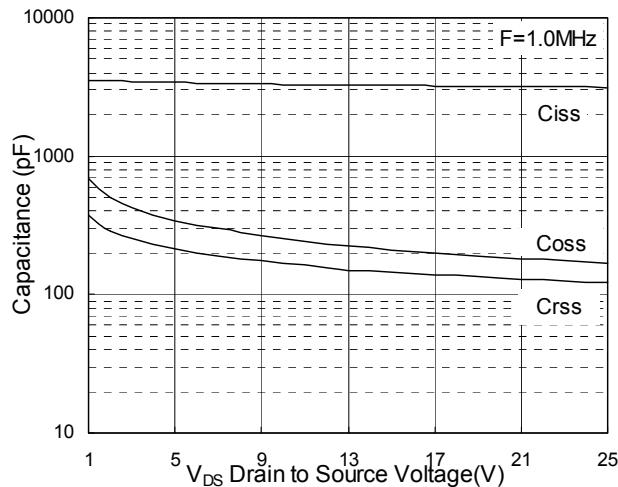
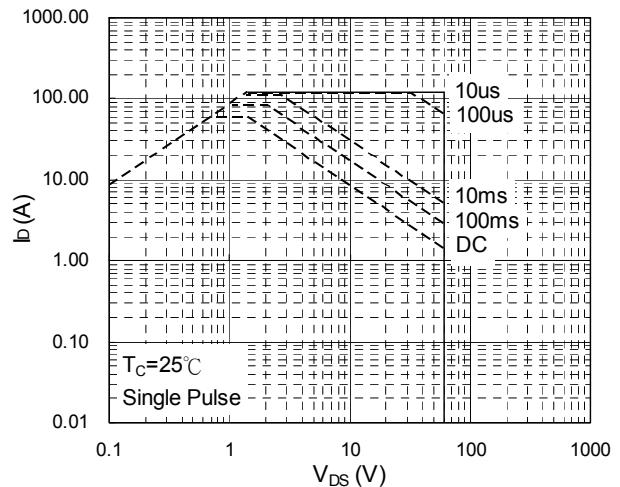
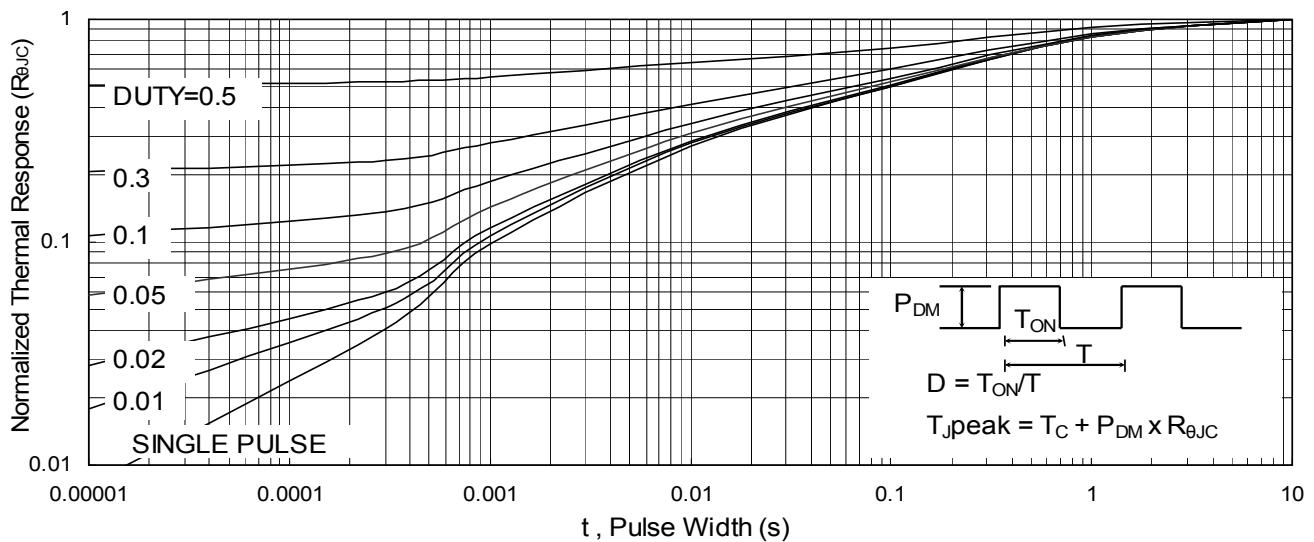
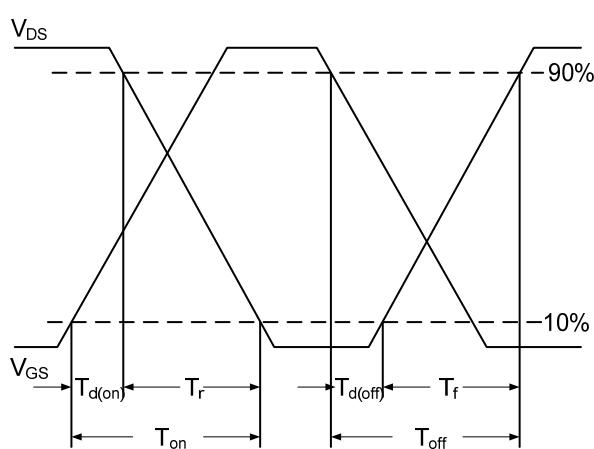
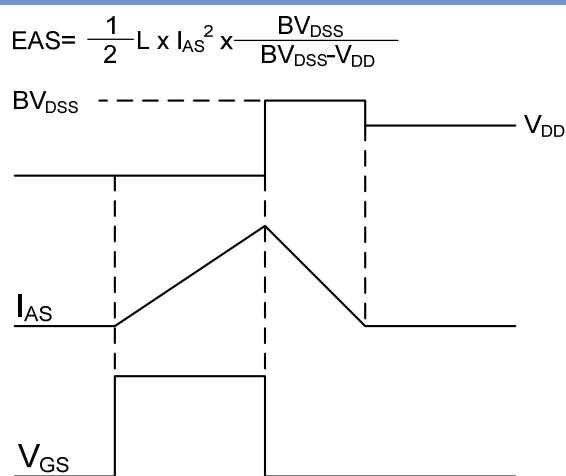
Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current ^{1,6}	$\text{V}_G=\text{V}_D=0\text{V}$, Force Current	---	---	60	A
I_{SM}	Pulsed Source Current ^{2,6}		---	---	165	A
V_{SD}	Diode Forward Voltage ²	$\text{V}_{\text{GS}}=0\text{V}$, $\text{I}_S=A$, $T_J=25^\circ\text{C}$	---	---	1.2	V
t_{rr}	Reverse Recovery Time	$\text{I}_F=15\text{A}$, $d\text{I}/dt=100\text{A}/\mu\text{s}$, $T_J=25^\circ\text{C}$	---	18	---	nS
Q_{rr}	Reverse Recovery Charge		---	14	---	nC

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- 3.The EAS data shows Max. rating . The test condition is $\text{V}_{\text{DD}}=25\text{V}, \text{V}_{\text{GS}}=10\text{V}, \text{L}=0.1\text{mH}, \text{I}_{\text{AS}}=38\text{A}$
- 4.The power dissipation is limited by 150°C junction temperature
- 5.The Min. value is 100% EAS tested guarantee.
- 6.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

Fig.1 Typical Output Characteristics

Fig.3 Forward Characteristics of Reverse

Fig.5 Normalized $V_{GS(th)}$ v.s T_J

Fig.2 On-Resistance v.s Gate-Source

Fig.4 Gate-Charge Characteristics

Fig.6 Normalized $R_{DS(on)}$ v.s T_J

N-Ch 60V Fast Switching MOSFETs

Fig.7 Capacitance

Fig.8 Safe Operating Area

Fig.9 Normalized Maximum Transient Thermal Impedance

Fig.10 Switching Time Waveform

Fig.11 Unclamped Inductive Switching Waveform