




Metallized Polyphenylene Sulfide Film Chip Capacitor

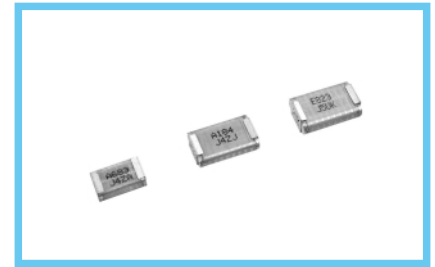


- Lead frame outer electrode.
- Resonance circuit for LCD backlighting inverter unit
- Applicable for reflow soldering. [Lead-free correspondence]
- Adapted to the RoHS directive (2002/95/EC).

Specifications


Item	Performance Characteristics
Category Temperature Range	-40 ~ +125°C (Rated temperature : 105°C)
Rated Voltage (U _R)	100VDC / 63VAC , 250VDC / 80VAC
Rated Capacitance Range	0.01 ~ 0.22μF
Capacitance Tolerance	± 5% (J), ± 10% (K)
Dielectric Loss Tangent	0.15% or less (at 1kHz 20°C)
Insulation Resistance	15,000 MΩ min
Withstand Voltage	Between Terminals : Rated Voltage (U _R) × 150% 60s
Encapsulation	Case less (Liquefied Epoxy resin)
Resistance to Soldering heat	Reflow : Peak 250°C, 10s less than
Related standard	JIS C 5101-20, EIAJ RC-2349

Category voltage = U_R × 0.8

Type numbering system (Example : 100VDC 0.1μF)

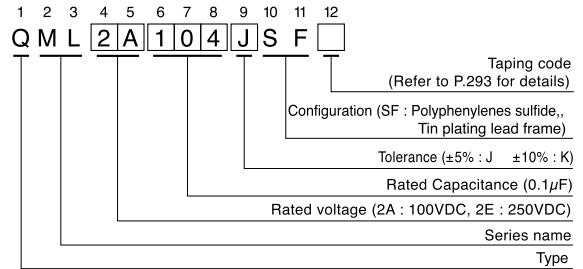


Drawing

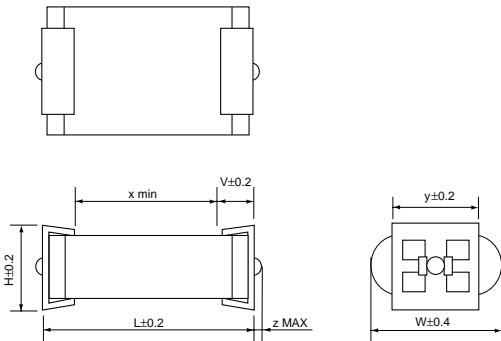

Land Dimensions

Voltage (V)	Cap (μF)	A	B	C
100	0.01 ~ 0.15	5.5	10.0	4.0
250	0.01 ~ 0.056			
100	0.18 ~ 0.22	8.0	12.6	4.0
250	0.068 ~ 0.1			

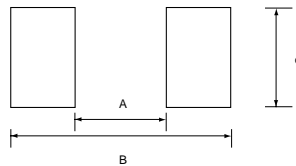

Dimensions

Unit : (mm)

Cap. (μF)	V(Code)	Code	Size	100VDC / 63VAC (2A)							250VDC / 80VAC (2E)								
				H	L	W	v	x	y	z	Taping code	H	L	W	v	x	y	z	Taping code
0.01	103			3.0	8.1	5.2	1.2	5.1	4.2	0.3	A	3.0	8.1	5.2	1.2	5.1	4.2	0.3	A
0.012	123			3.0	8.1	5.3	1.2	5.1	4.2	0.3	A	3.0	8.1	5.3	1.2	5.1	4.2	0.3	A
0.015	153			3.0	8.1	5.3	1.2	5.1	4.2	0.3	A	3.0	8.1	5.3	1.2	5.1	4.2	0.3	A
0.018	183			3.0	8.1	5.2	1.2	5.1	4.2	0.3	A	3.0	8.1	5.2	1.2	5.1	4.2	0.3	A
0.022	223			3.0	8.1	5.3	1.2	5.1	4.2	0.3	A	3.0	8.1	5.3	1.2	5.1	4.2	0.3	A
0.027	273			3.0	8.1	5.3	1.2	5.1	4.2	0.3	A	3.0	8.1	5.3	1.2	5.1	4.2	0.3	A
0.033	333			3.0	8.1	5.3	1.2	5.1	4.2	0.3	A	3.0	8.1	5.5	1.2	5.1	4.2	0.3	A
0.039	393			3.0	8.1	5.2	1.2	5.1	4.2	0.3	A	3.0	8.1	6.3	1.2	5.1	4.2	0.3	B
0.047	473			3.0	8.1	5.3	1.2	5.1	4.2	0.3	A	3.5	8.1	6.3	1.2	5.1	4.2	0.3	B
0.056	563			3.0	8.1	5.3	1.2	5.1	4.2	0.3	A	3.5	8.1	7.0	1.2	5.1	4.2	0.3	B
0.068	683			3.0	8.1	5.3	1.2	5.1	4.2	0.3	A	3.5	10.6	7.1	1.2	7.6	4.2	0.3	C
0.082	823			3.0	8.1	5.5	1.2	5.1	4.2	0.3	A	3.5	10.6	7.2	1.2	7.6	4.2	0.3	C
0.1	104			3.0	8.1	5.8	1.2	5.1	4.2	0.3	B	3.5	10.6	7.8	1.2	7.6	4.2	0.3	E
0.12	124			3.5	8.1	6.1	1.2	5.1	4.2	0.3	B								
0.15	154			3.5	8.1	6.5	1.2	5.1	4.2	0.3	B								
0.18	184			3.0	10.6	6.8	1.2	7.6	4.2	0.3	C								
0.22	224			3.5	10.6	7.0	1.2	7.6	4.2	0.3	C								