



VOLTAGE RANGE: 2500 --- 6000 V

CURRENT: 0.2 A


Features

- ✧ Low cost
- ✧ Low leakage
- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ Easily cleaned with alcohol, Isopropanol and similar solvents
- ✧ The plastic material carries U/L recognition 94V-0

Mechanical Data

- ✧ Case: JEDEC DO-15, molded plastic
- ✧ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ✧ Polarity: Color band denotes cathode
- ✧ Weight: 0.014 ounces, 0.39 grams
- ✧ Mounting position: Any

DO-15

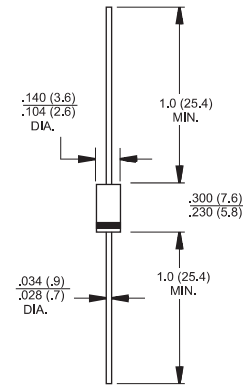

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		R2500	R3000	R4000	R5000	R6000	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	2500	3000	4000	5000	6000	V
Maximum RMS voltage	V_{RMS}	1750	2100	2800	3500	4200	V
Maximum DC blocking voltage	V_{DC}	2500	3000	4000	5000	6000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$	$I_{F(AV)}$	0.2					A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ C$	I_{FSM}	30.0					A
Maximum instantaneous forward voltage @ 0.2A	V_F	3.0	4.0	5.0			V
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$	I_R	5.0 50.0					μA
Typical junction capacitance (Note1)	C_J	30					pF
Typical thermal resistance (Note2)	$R_{\theta JA}$	35					$^\circ C/W$
Operating junction temperature range	T_J	- 55 ---- + 150					$^\circ C$
Storage temperature range	T_{STG}	- 55 ---- + 150					$^\circ C$

NOTE: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Thermal resistance from junction to ambient.

RATINGS AND CHARACTERISTIC CURVES

FIG.1 – FORWARD DERATING CURVE

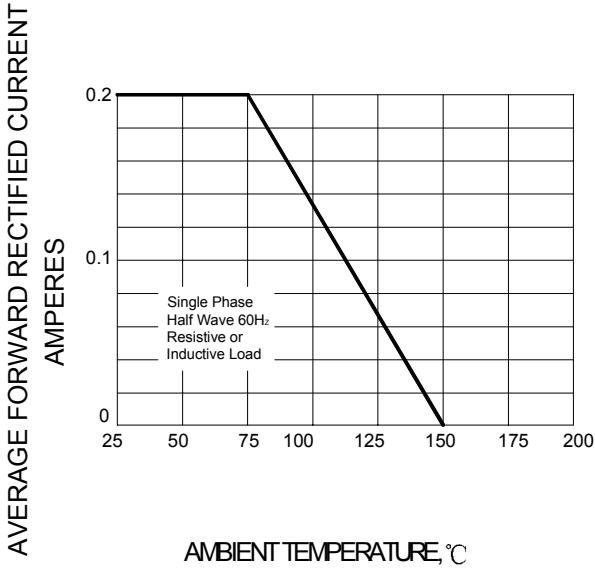


FIG.2 – TYPICAL FORWARD CHARACTERISTICS

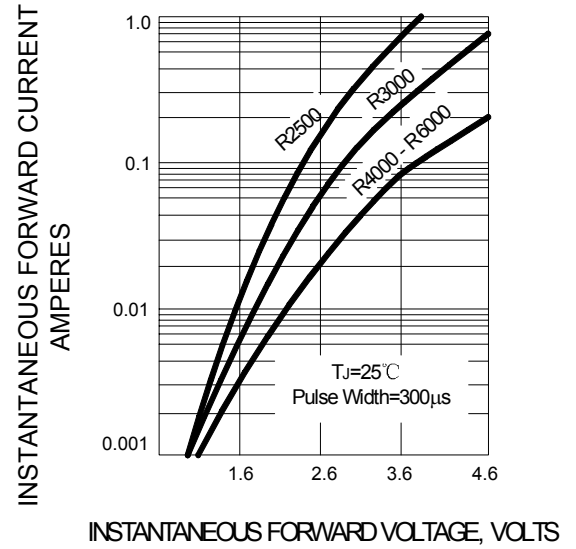


FIG.3 – PEAK FORWARD SURGE CURRENT

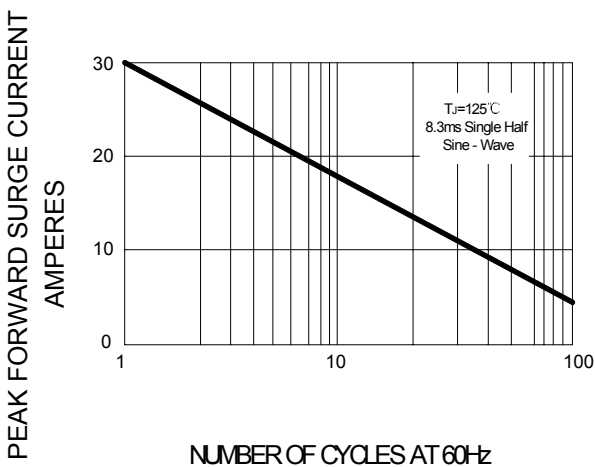


FIG.4 – TYPICAL JUNCTION CAPACITANCE

