

**For Astrophysics and other ultraviolet radiation detection
28mm(1-1/8 Inch) diameter, 11-stage, Cs-Te photocathode
Solar blind response(160nm to 320nm), Head-on type**

GENERAL

Parameter		Description / Value	Unit
Spectral Response		160 to 320	nm
Wavelength of Maximum Response		240	nm
Photocathode	Material	Cs-Te	-
	Minimum Effective Area	25	mm dia.
Window Material		Synthetic silica	-
Dynode	Structure	Box & Line	-
	Number of Stages	11	-
Suitable Socket		E678-14C (supplied)	-

MAXIMUM RATINGS (Absolute Maximum Values)

Parameter		Value	Unit
Supply Voltage	Between Anode and Cathode	1500	Vdc
	Between Anode and Last Dynode	250	Vdc
Average Anode Current		0.01	mA

CHARACTERISTICS (at 25°C)

Parameter		Min.	Typ.	Max.	Unit
Cathode Sensitivity	Radiant at 254nm	-	28	-	mA/W
Anode Sensitivity	Radiant at 254nm	-	1.4×10^4	-	A/W
Gain		-	5.0×10^5	-	-
Anode Dark Current (after 30min. storage in darkness)		-	0.3	1.0	nA
Time Response	Anode Pulse Rise Time	-	4.0	-	ns
	Electron Transit Time	-	30	-	ns

NOTE: Anode characteristics are measured with the voltage distribution ratio shown below.

VOLTAGE DISTRIBUTION RATIO AND SUPPLY VOLTAGE

Electrodes	K	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7	Dy8	Dy9	Dy10	Dy11	P
Ratio	1	1	1	1	1	1	1	1	1	1	1	1	1

Supply Voltage : 1000Vdc, K : Cathode, Dy : Dynode, P : Anode

PHOTOMULTIPLIER TUBE R6834

Figure 1: Typical Spectral Response

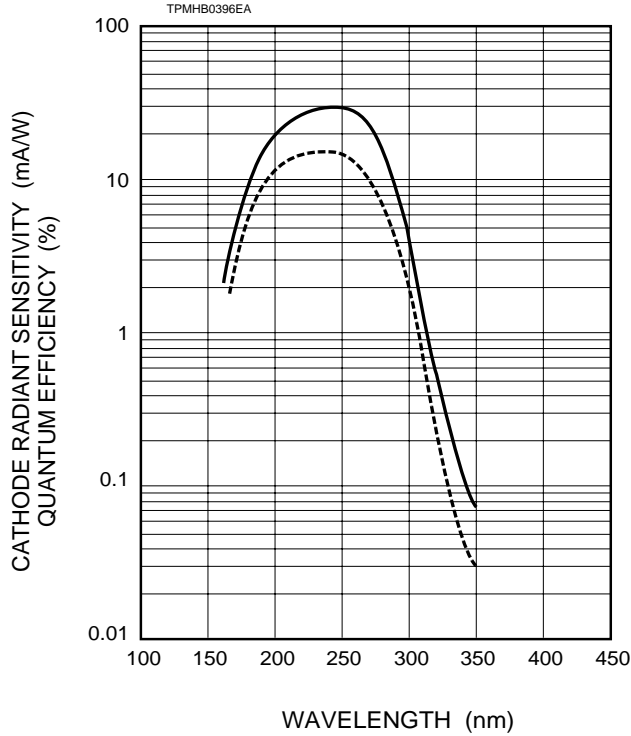


Figure 2: Typical Gain


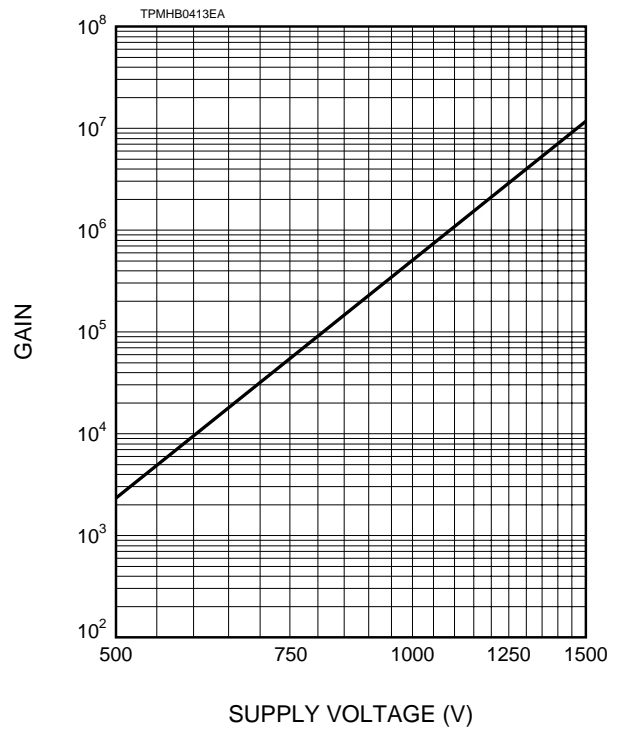


Figure 3: Dimensional Outline and Basing Diagram (Unit : mm)

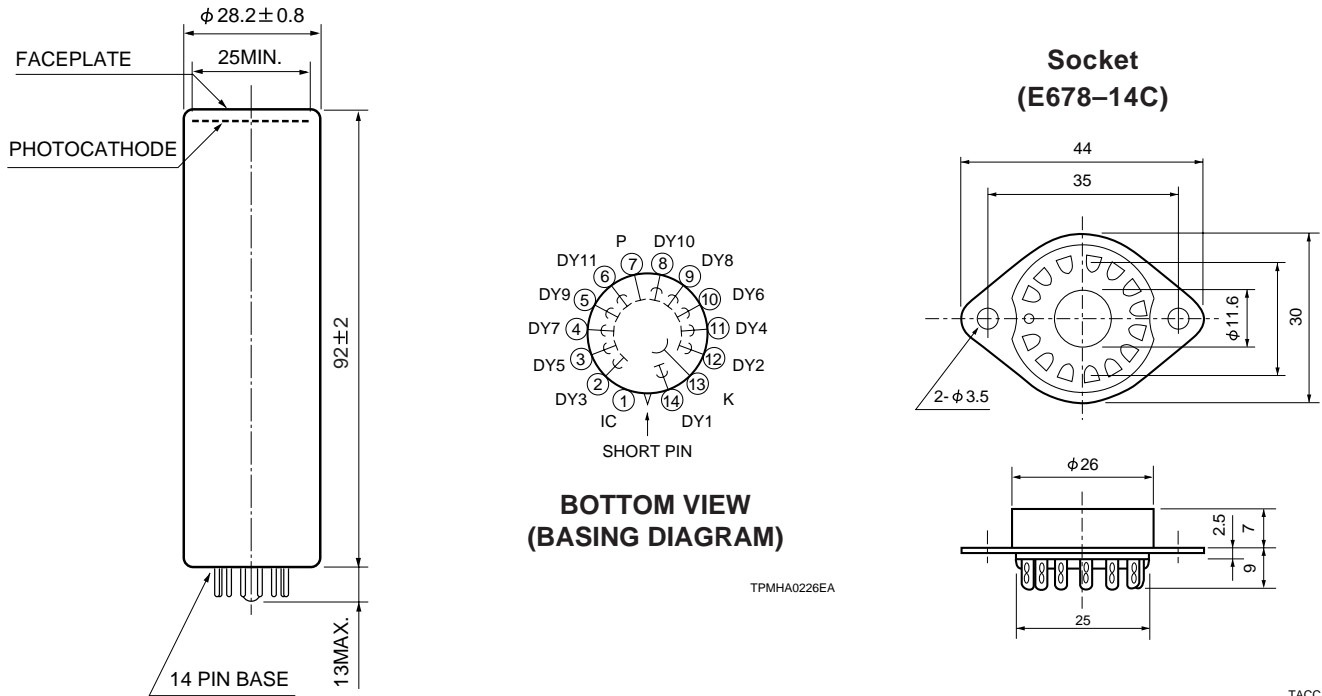

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Electron Tube Center

314-5, Shimokanzo, Toyooka-village, Iwata-gun, Shizuoka-ken, 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: Lough Point, 2 Gladbeck Way, Windmill Hill, Enfield, Middlesex EN2 7JA, United Kingdom, Telephone: (44)181-367-3560, Fax: (44)181-367-6384

North Europe: Hamamatsu Photonics Norden AB: Färögatan 7, S-164-40 Kista Sweden, Telephone: (46)8-703-29-50, Fax: (46)8-750-58-95

Italy: Hamamatsu Photonics Italia: S.R.L.: Via Della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)2-935 81 733, Fax: (39)2-935 81 741

TPMH1158E01
JUN. 1997