

■ Features


- Low current rectification and high speed switching.
- Extremely small surface mount type.
- Up to 100mA current capability.
- Silicon epitaxial planar chip, metal silicon junction.
- Suffix "G" indicates Halogen-free part, ex. RB521GG.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228

■ Mechanical data

- Epoxy: UL94-V0 rated flame retardant
- Case : Molded plastic, SOD-723
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Weight : Approximated 0.00077 gram

■ Outline

SOD-723

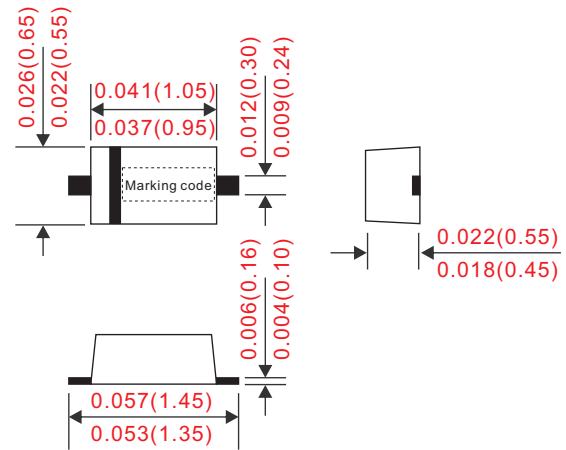

Dimensions in inches and (millimeters)

■ Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	RB521G	UNIT			
Marking code		F				
Maximum Recurrent Peak Reverse Voltage	V_{RM}	30	V			
Continuous reverse voltage	V_R	30				
Maximum Instantaneous Forward Voltage@10mA DC	V_F	0.35	V			
Power Dissipation	P_D	150	mW			
Operating Temperature	T_J	-40 ~ +125	°C			
Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Mean rectifying current		I_o			100	mA
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I_{FSM}			500	mA
Reverse current	$V_R = 10V$ DC	I_R			10	uA
Reverse breakdown voltage	$I_R = 100\mu A$	$V_{(BR)R}$	30			V
Capacitance between terminals	f=1MHz and applied 10VDC reverse voltage	C_T		4		pF
Storage temperature		T_{STG}	-40		+125	°C

■ Rating and characteristic curves

FIG.1-TYPICAL FORWARD CHARACTERISTICS

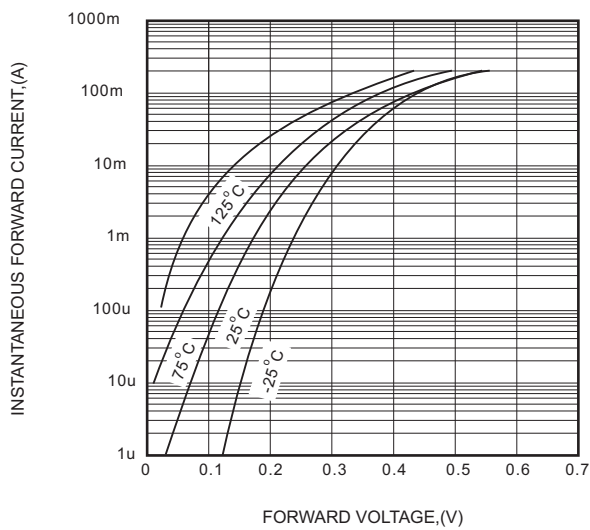


FIG.2 - TYPICAL REVERSE CHARACTERISTICS



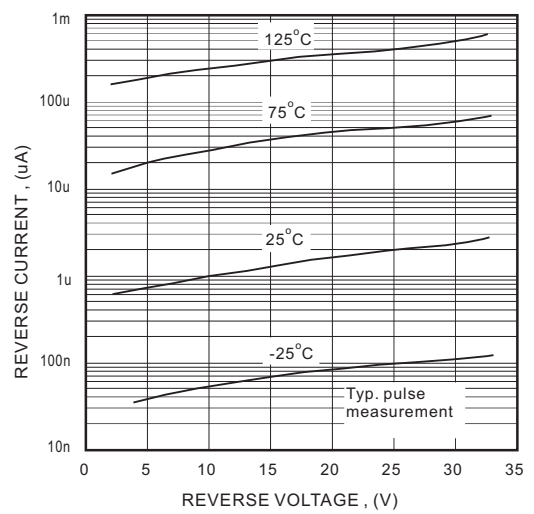


FIG.3-TYPICAL TERMINALS CAPACITANCE

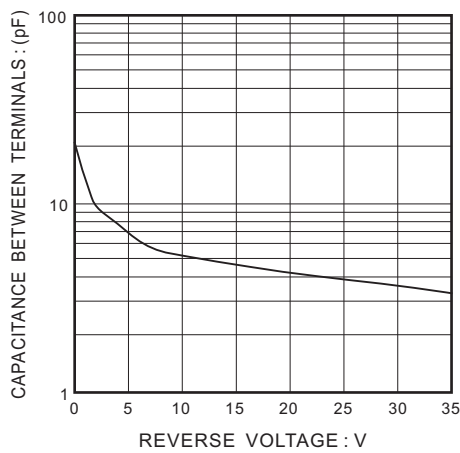

■ SOD-723 foot print

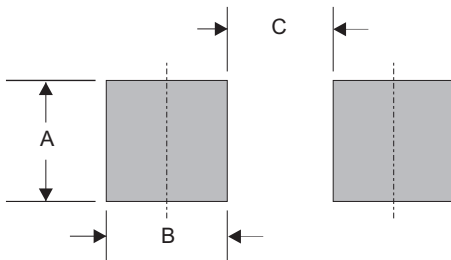

A	B	C
0.018 (0.45)	0.020 (0.50)	0.035 (0.90)

Dimensions in inches and (millimeters)

- CITC reserves the right to make changes to this document and its products and specifications at any time without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- CITC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does CITC assume any liability for application assistance or customer product design.
- CITC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of CITC.
- CITC products are not authorized for use as critical components in life support devices or systems without express written approval of CITC.