

■ Features


- Low forward voltage and low reverse current.
- Extremely high switching speed.
- High reliability.
- Low forward voltage drop .
- Schottky barrier diodes encapsulated in a SOD-323 package.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228

■ Mechanical data

- Epoxy:UL94-V0 rated flame retardant
- Case : Molded plastic, SOD-323
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Weight : 0.0002 ounce, 0.005 gram

■ Outline

SOD-323

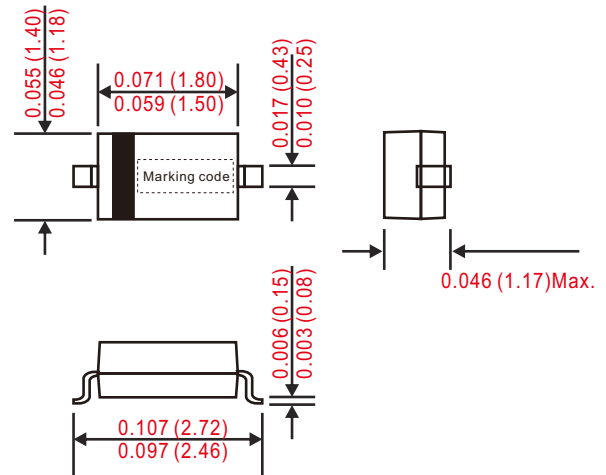

Dimensions in inches and (millimeters)

■ Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	RB551V-40	UNIT
Marking code		E1	
Peak reverse voltage	V_{RM}	40	V
DC reverse voltage	V_R	30	
Average rectifier forward current	I_O	500	mA
Peak forward surge current	I_{FSM}	2000	
Operation junction temperature range	T_J	125	°C
Storage temperature range	T_{STG}	-40 ~ +125	

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Forward voltage	$I_F = 100mA$	V_F			360	mV
	$I_F = 500mA$				470	
Reverse leakage	$V_R = 20V$	I_R			100	uA

Rating and characteristic curves

Fig. 1 Forward characteristics

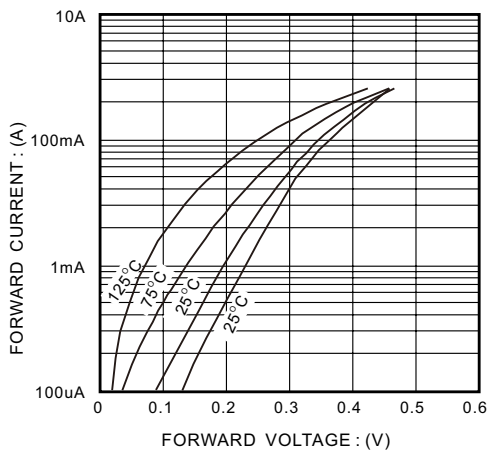


Fig. 2 Reverse characteristics

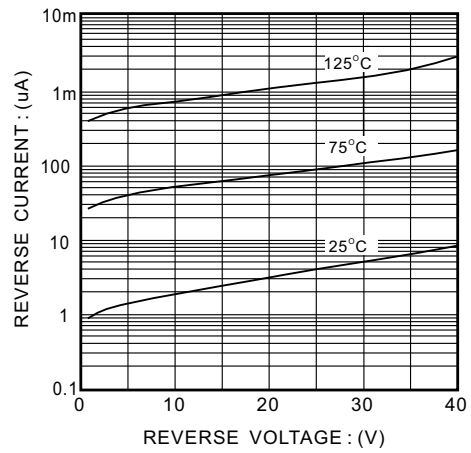


FIG.3-TYPICAL TERMINALS CAPACITANCE



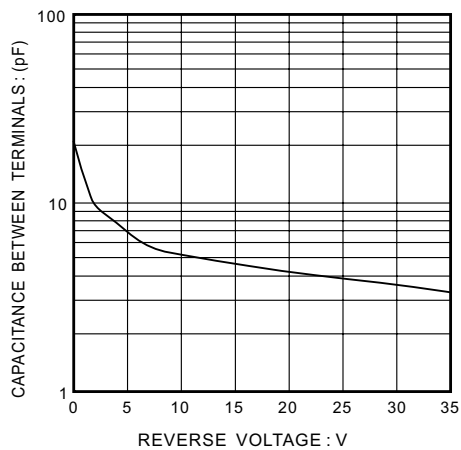


Fig. 4 Derating curve

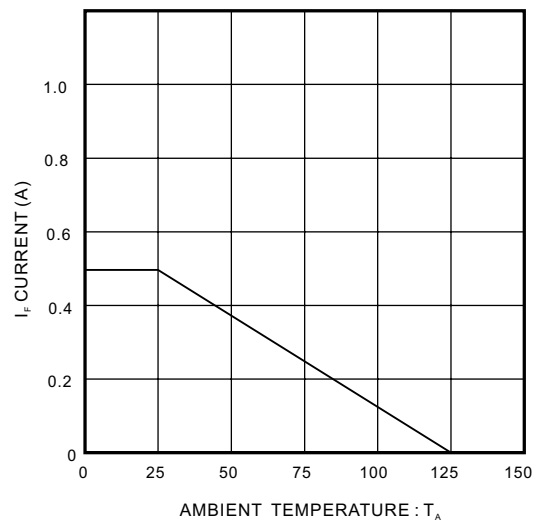

■ SOD-323 foot print

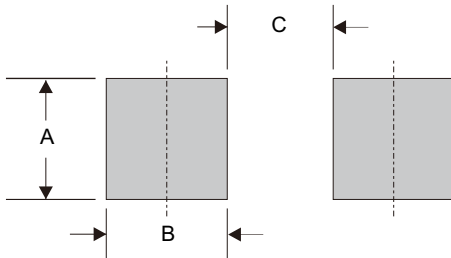

A	B	C
0.059 (1.50)	0.039 (1.00)	0.051 (1.30)

Dimensions in inches and (millimeters)

- CITC reserves the right to make changes to this document and its products and specifications at any time without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- CITC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does CITC assume any liability for application assistance or customer product design.
- CITC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of CITC.
- CITC products are not authorized for use as critical components in life support devices or systems without express written approval of CITC.