

**SURFACE MOUNT  
SCHOTTKY BARRIER DIODE**

**REVERSE VOLTAGE – 30 Volts  
FORWARD CURRENT – 0.03 mAmpere**


**FEATURES**

- Low Forward Voltage Drop
- Flat Lead SOD-523F Small Outline Plastic Package
- Extremely Small SOD-523F Package
- Surface Device Type Mounting
- RoHS Compliant
- Green EMC
- Matte Tin(Sn) Lead Finish
- Band Indicates Cathode

**MECHANICAL DATA**

- Case: SOD-523F Plastic

**SOD-523F**

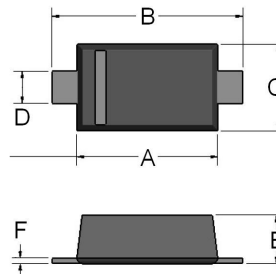

SOD-523F		
DIM.	MIN.	MAX.
A	1.10	1.30
B	1.50	1.70
C	0.7	0.9
D	0.25	0.35
E	0.50	0.70
F	0.05	0.20
All Dimensions in millimeter		

**Maximum Ratings & Thermal Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified**

Characteristic	Symbol	RB751S-40F	Units
Power Dissipation	P <sub>D</sub>	200	mW
Reverse Voltage	V <sub>R</sub>	30	V
Forward Current	I <sub>F</sub>	30	mA
Operating Temperature Range	T <sub>J</sub>	+125	°C
Storage Temperature Range	T <sub>STG</sub>	-55~+125	°C
Peak Reverse Voltage	V <sub>RM</sub>	40	V
Non-Repetitive Peak Forward Current	I <sub>FSM</sub>	500	mA


**Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified**

Characteristic	Test Condition	Symbol	RB751S-40F	Unit
Breakdown Voltage	I <sub>R</sub> =10μA	BV	30	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	V <sub>R</sub> = 30V	I <sub>R</sub>	0.5	uA
Maximum DC Forward Voltage	I <sub>F</sub> =1mA	V <sub>F</sub>	0.37	V


These ratings are limiting values above which the serviceability of the diode may be impaired.

**REV. 0, Aug-2011, KSHR65**


**FIG.1-TYPICAL FORWARD CHARACTERISTICS**

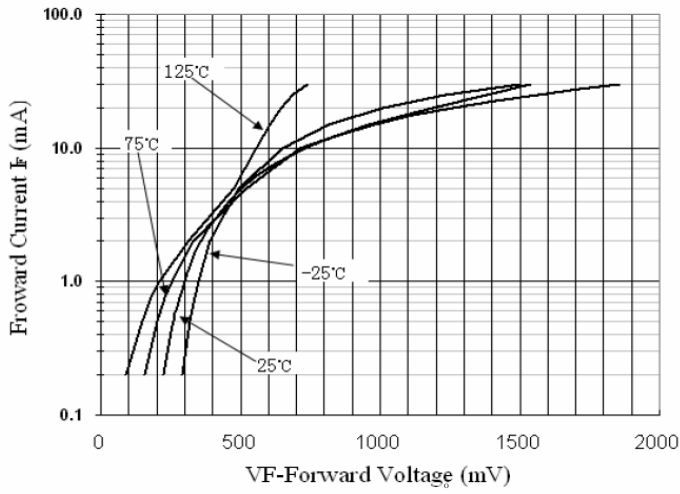

**FIG.2-TYPICAL REVERSE CHARACTERISTICS**

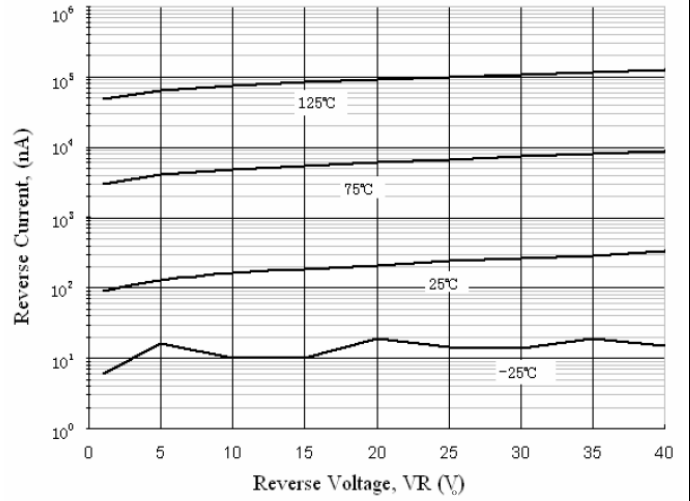

**FIG.3-TYPICAL JUNCTION CAPACITANCE**

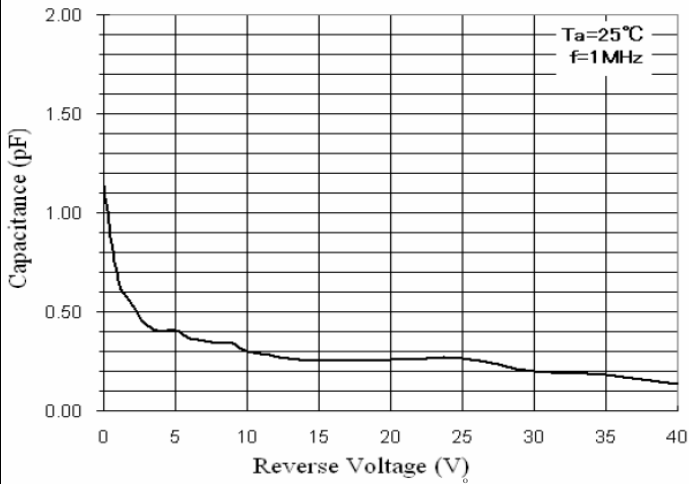

**Device Marking :**

Device P/N	Marking	Equivalent Circuit Diagram
RB751S-40F	4B	

## **Important Notice and Disclaimer**

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.