
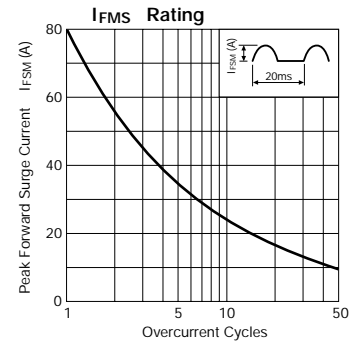






Bridge Diodes (Ultra-Fast-Recovery)

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)							Others		
	V _{RM} (V)	I _{F(AV)} (A) With Heatsink	I _{FSM} (A) 50Hz Half-cycle Sinewave Single Shot	T _J (°C)	T _{stg} (°C)	V _F (V)		I _R (mA)	I _{R(H)} (mA)	t _{rr} ① (ns)	t _{rr} ② (ns)	R _{th(j-c)} (°C/W)	Mass (g)	Fig.	
						max per element	I _F (A)								V _R =V _{RM} max per element
RBV-402L	200	4.0	80	-40 to +150		0.98	2.0	0.05	0.1	40	100/100	30	5.0	4.05	Ⓐ
RBV-602L		6.0	100			1.0	3.0	0.25	1.0	50					

RBV-402L



RBV-602L

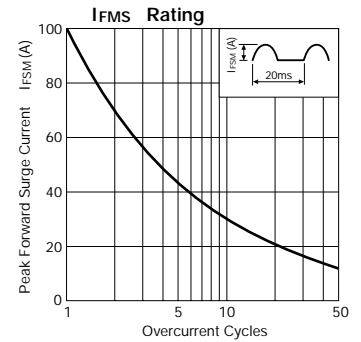

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

Fig. Ⓐ

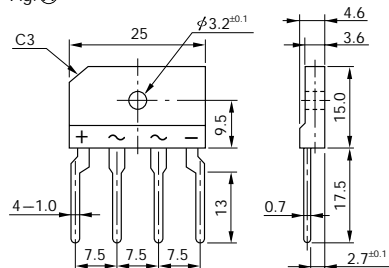


Fig. Ⓑ

