


型名: RCDC 6028



1. 尺寸(毫米)

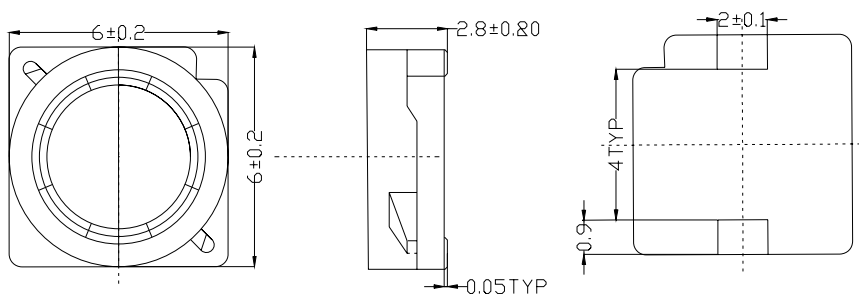

2. 技术参数

NO.	品名	电感(μ H)	电阻 ($m\Omega$) (MAX)	额定电流 (A)
1	RCDC 6028-4R7	4.7	28.6	1.6
2	RCDC 6028-6R8	6.8	35.6	1.5
3	RCDC 6028-100	10	53.4	1.3
4	RCDC 6028-150	15	74.6	1
5	RCDC 6028-220	22	106	0.73
6	RCDC 6028-330	33	148	0.68
7	RCDC 6028-470	47	210	0.59
8	RCDC 6028-680	68	292	0.5
9	RCDC 6028-101	100	432	0.42

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.