


型名: RCDC 7032



1. 尺寸(毫米)

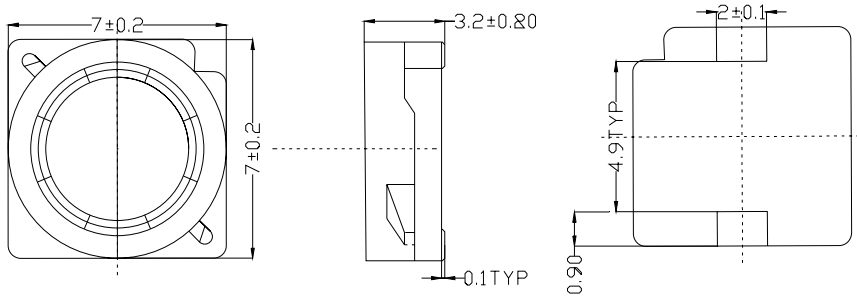

2. 技术参数

NO.	品名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	RCDC 7032-1R0	1.0	20	2.2
2	RCDC 7032-3R3	3.3	23	1.8
3	RCDC 7032-4R7	4.7	36	1.7
4	RCDC 7032-100	10	53	1.4
5	RCDC 7032-220	22	110	0.94
6	RCDC 7032-330	33	160	0.73
7	RCDC 7032-470	47	240	0.65
8	RCDC 7032-101	100	450	0.45
9	RCDC 7032-471	470	2050	0.2
10	RCDC 7032-102	1000	4780	0.12

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.