


型名: RCDC 7045



## 1. 尺寸 (毫米)

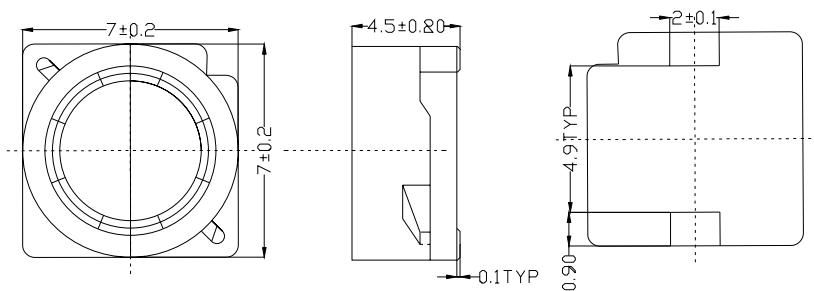

## 2. 技术参数

NO.	品名	电感( $\mu$ H)	电阻 (m $\Omega$ ) (MAX)	额定电流 (A)
1	RCDC 7045-1R0	1.0	20	4
2	RCDC 7045-3R3	3.3	20	2.5
3	RCDC 7045-4R7	4.7	30	2
4	RCDC 7045-100	10	36	1.3
5	RCDC 7045-150	15	52	1.1
6	RCDC 7045-220	22	61	0.9
6	RCDC 7045-470	47	127	0.73
7	RCDC 7045-101	100	250	0.5
8	RCDC 7045-151	150	340	0.4
9	RCDC 7045-221	220	520	0.32
10	RCDC 7045-471	470	1050	0.22
11	RCDC 7045-102	1000	2280	0.12

无铅

测定频率 100kHz

电感公差范围 ( $\pm 30\%$ )

额定电流: 指电感值减小到原值 65%时的电流.