


型名: RCH 654



1.尺寸(毫米)

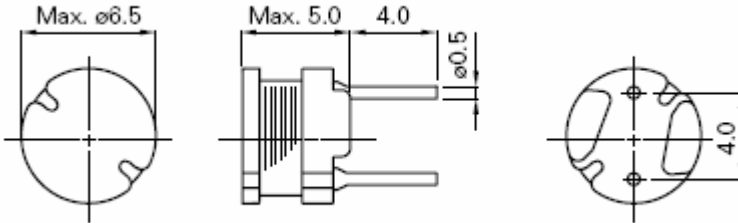

2. 技术参数

| NO. | 品 名 | 电感(μ H) | 电阻 (m Ω) (MAX) | 额定电流 (A) |
|-----|-------------|--------------|------------------------|----------|
| 1 | RCH654 -1R0 | 1.0 | 29 | 3.00 |
| 3 | RCH654 -2R0 | 2.0 | 39 | 2.46 |
| 4 | RCH654 -3R3 | 3.3 | 48 | 1.98 |
| 5 | RCH654-4R7 | 4.7 | 60 | 1.72 |
| 6 | RCH654 -5R6 | 5.6 | 66 | 1.53 |
| 8 | RCH654 -8R2 | 8.2 | 85 | 1.24 |
| 9 | RCH654 -100 | 10 | 91 | 1.20 |
| 11 | RCH654-150 | 15 | 120 | 0.96 |
| 13 | RCH654-220 | 22 | 180 | 0.90 |
| 14 | RCH654-270 | 27 | 210 | 0.81 |
| 15 | RCH654-330 | 33 | 270 | 0.72 |
| 16 | RCH654-470 | 47 | 340 | 0.62 |
| 17 | RCH654-560 | 56 | 420 | 0.55 |
| 18 | RCH654-680 | 68 | 480 | 0.51 |
| 19 | RCH654-820 | 82 | 550 | 0.47 |
| 20 | RCH654-101 | 100 | 680 | 0.40 |
| 21 | RCH654-151 | 150 | 950 | 0.35 |
| 22 | RCH654-221 | 220 | 1300 | 0.29 |
| 23 | RCH654-271 | 270 | 1550 | 0.24 |
| 24 | RCH654-471 | 470 | 2920 | 0.20 |
| 25 | RCH654-681 | 680 | 4570 | 0.16 |
| 26 | RCH654-102 | 1000 | 7060 | 0.12 |

无铅

测定频率 100Khz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.