


型名: RCH855



## 1.尺寸(毫米)

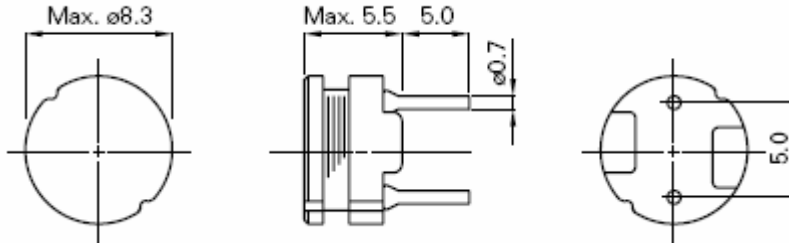

## 2. 技术参数

NO.	品名	电感( $\mu$ H)	电阻 (m $\Omega$ ) (MAX)	额定电流 (A)
1	RCH855 -2R5	2.5	23	4.50
2	RCH855 -3R3	3.3	26	4.00
4	RCH855 -6R8	6.8	43	2.90
5	RCH855-100	10	70	2.50
7	RCH855 -220	22	122	1.70
8	RCH855 -330	33	170	1.40
9	RCH855 -390	39	210	1.30
10	RCH855-470	47	240	1.20
11	RCH855-560	56	310	1.10
12	RCH855-680	68	340	1.00
13	RCH855-820	82	400	0.93
14	RCH855-101	100	520	0.80
15	RCH855-121	120	590	0.74
16	RCH855-151	150	710	0.65
17	RCH855-181	180	890	0.62
18	RCH855-221	220	1040	0.54
19	RCH855-271	270	1280	0.47
20	RCH855-331	330	1470	0.44
21	RCH855-471	470	1950	0.38
22	RCH855-102	1000	5280	0.24
23	RCH855-222	2200	11100	0.18
24	RCH855-472	4700	23900	0.12
25	RCH855-682	6800	31700	0.096

无铅  
测定频率 100Khz  
电感公差范围 ( $\pm 30\%$ )  
额定电流: 指电感值减小到原值 65%时的电流.