


型名: RCH875



## 1. 尺寸(毫米)

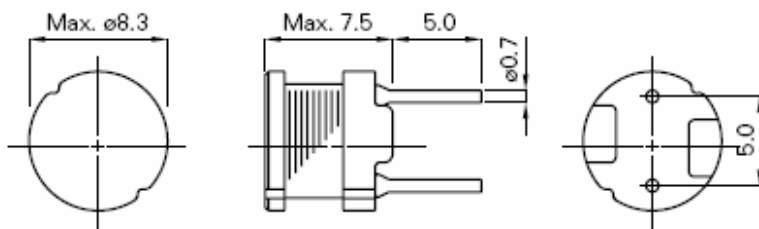

## 2. 技术参数

| NO. | 品名          | 电感( $\mu$ H) | 电阻 ( $m\Omega$ ) (MAX) | 额定电流 (A) |
|-----|-------------|--------------|------------------------|----------|
| 1   | RCH875 -2R2 | 2.2          | 13.8                   | 5.78     |
| 2   | RCH875 -2R8 | 2.8          | 15.3                   | 5.00     |
| 3   | RCH875 -3R5 | 3.5          | 17.2                   | 4.70     |
| 4   | RCH875 -6R0 | 6.0          | 22.2                   | 4.00     |
| 5   | RCH875-8R2  | 8.2          | 26.7                   | 3.08     |
| 6   | RCH875 -100 | 10           | 50                     | 2.90     |
| 7   | RCH875 -150 | 15           | 72                     | 2.18     |
| 8   | RCH875 -220 | 22           | 90                     | 1.80     |
| 9   | RCH875 -330 | 33           | 132                    | 1.48     |
| 10  | RCH875-470  | 47           | 150                    | 1.30     |
| 11  | RCH875-680  | 68           | 200                    | 1.10     |
| 12  | RCH875-101  | 100          | 350                    | 0.87     |
| 13  | RCH875-151  | 150          | 420                    | 0.72     |
| 14  | RCH875-221  | 220          | 630                    | 0.56     |
| 15  | RCH875-471  | 470          | 1340                   | 0.41     |
| 16  | RCH875-681  | 680          | 1960                   | 0.32     |
| 17  | RCH875-102  | 1000         | 2940                   | 0.27     |
| 18  | RCH875-152  | 1500         | 4700                   | 0.22     |
| 19  | RCH875-222  | 2200         | 6250                   | 0.17     |
| 20  | RCH875-332  | 3300         | 10600                  | 0.15     |
| 21  | RCH875-472  | 4700         | 16700                  | 0.12     |
| 22  | RCH875-682  | 6800         | 21800                  | 0.08     |

无铅  
测定频率 100Khz  
电感公差范围 ( $\pm 30\%$ )  
额定电流: 指电感值减小到原值 65%时的电流.