

**Features :**

- Operating voltage: 5.0V
- I/O-Isolation 3000 VDC
- Baud rate : 1Mbps(MAX)
- Bus protection
- Compatible with ISO11898 standard
- No External Components Required
- ESD Protection ( Contact model : ±4KV )
- Input reverse connect protection
- Operating temperature : -40 ~ +85



**DESCRIPTION**

RCM1050T is the differential level high speed transceiver which integrates with DC and DC 3000 isolation, which makes the controller output high low logic level programming of CAN bus, meeting the standard of ISO11898. Using RCM1050T transceiver in Can-bus system, which builds the completely isolated interface between the Can-bus controller and the physical layer bus, and to improve the ability of anti common mode interference. The Can-bus outlet end for this product is with TVS tube, which increases the chip prohibit the bus from overvoltage capability(Note: RCM1050 is without this function).

**Model Selection Guide**

Order Code	Input Voltage		Baud rate(Kbps)	Bus Over Voltage Protection	Input reverse connect protection
	Vin(VDC)	Range(VDC)			
RCM1050	5	4.75-5.25	1024	No	Yes
RCM1050T			1024	Yes	Yes

**Parameter**

Item	Specification	Min	Typ	Max	Units
Input Voltage		4.75	5.0	5.25	VDC
Operating Temperature		-40		+85	
Storage Temperature		-55		+125	
Isolation voltage			3000		VDC
Isolation capacitance			40		pF
Humidity	No frosting	10		95	%
Quiescent Current			35		mA
Device Amounts		110			Point
Propagation delay time		50		150	μS
TXD/RXD pin current				3	mA
Bus voltage		-26		+40	V
Instantaneous bus voltage range		-200		+200	V

**Receiver Function**

V <sub>CANH-CANL</sub> (VDC)	Bus state	Output(RXD)
0.9	Dominant	0
0.5	Recessive	1


**Driver Function**

Input(TXD)	Bus state	CANH	CANL
0	Dominant	1	0
1	Recessive	0.5Vin	0.5Vin

**Application**

Application Area	Typical Circuit
<ul style="list-style-type: none"> <li>→ Industrial automation system</li> <li>→ Automatic control on electrical power system</li> <li>→ Cartronics</li> <li>→ Communication</li> <li>→ Mining</li> <li>→ Instrument and meter</li> <li>→ Medical equipment</li> </ul>	

**Mechanical Dimension**

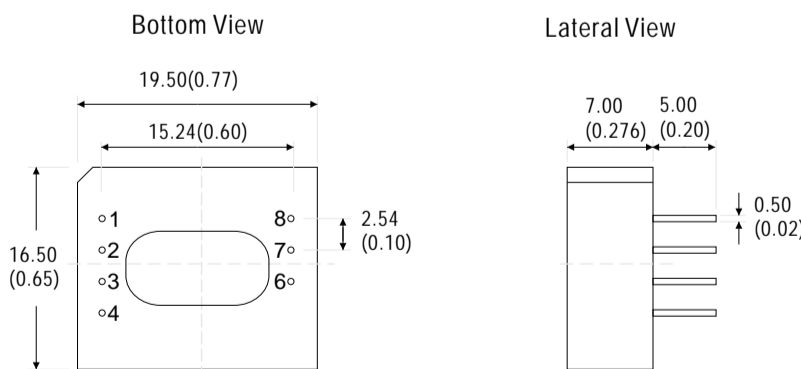

Units : mm ( inch )  
Tolerances : ±0.25mm ( ±0.01inch )

**Pin Connections**

Pin	Function	Description
1	+Vin	positive pole
2	GND	negative pole
3	TXD	Driver input data
4	RXD	Receiver output data
6	CANH	High electrical level
7	CANL	Low electrical level
8	CAN-GND	CAN Bus Isolated Ground