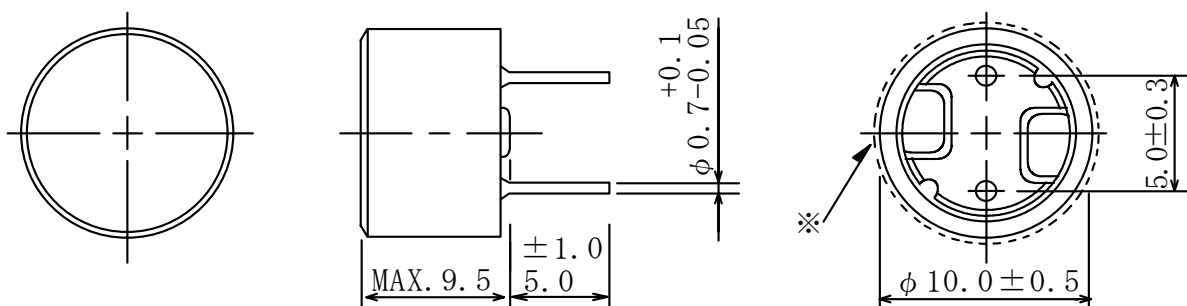


**Type: RCP-195D**
**◆ Product Description**

- 10.5mm Max  $\phi$ . (L×W), 9.5mm Max.height
- Inductance range: 10  $\mu$  H~47mH
- Rated Current Range: 17mA~1.3A

**◆ Feature**

- Magnetically shielded construction.
- Ideally Used in Printers, LCD TV, Copy Machine, Mainboard of the compounding machines, etc as Power Supplies's Inductors or DC-DC Converter inductors.
- RoHS Compliance

**◆ Dimensions (mm)**

**◆ Specification**

Part No.	Stamp	Inductance <Within> ※ 1	D.C.R( $\Omega$ ) <Max.> (at 20°C)	Saturation Current (A) ※ 2	Temperature rise current (A)※3
RCP195DNP-10 $\emptyset$ M	100M	10 $\mu$ H $\pm$ 20%	0.03	1.3	2.3
RCP195DNP-12 $\emptyset$ M	120M	12 $\mu$ H $\pm$ 20%	0.03	1.2	2.2
RCP195DNP-15 $\emptyset$ M	150M	15 $\mu$ H $\pm$ 20%	0.03	1.0	2.1
RCP195DNP-18 $\emptyset$ M	180M	18 $\mu$ H $\pm$ 20%	0.04	0.92	2.0
RCP195DNP-22 $\emptyset$ M	220M	22 $\mu$ H $\pm$ 20%	0.04	0.85	1.9
RCP195DNP-27 $\emptyset$ M	270M	27 $\mu$ H $\pm$ 20%	0.04	0.77	1.8
RCP195DNP-39 $\emptyset$ K	390K	39 $\mu$ H $\pm$ 10%	0.06	0.66	1.4
RCP195DNP-47 $\emptyset$ K	470K	47 $\mu$ H $\pm$ 10%	0.08	0.61	1.3
RCP195DNP-56 $\emptyset$ K	560K	56 $\mu$ H $\pm$ 10%	0.08	0.59	1.2
RCP195DNP-68 $\emptyset$ K	680K	68 $\mu$ H $\pm$ 10%	0.09	0.54	1.1
RCP195DNP-82 $\emptyset$ K	820K	82 $\mu$ H $\pm$ 10%	0.10	0.49	1.0

