



Package: DFN, 6-pin, 5.59mm x 6.23mm x 0.85mm




Features

- P1dB=33dBm at 5V
- 802.11g 54 Mb/s Class AB Performance
- P_{OUT}=25dBm at 2.5% EVM, V_{CC} 5V, 680mA
- On-Chip Output Power Detector
- Input Prematched Input and Output
- Proprietary Low Thermal Resistance Package
- Power Up/Down control < 1μs

Applications

- 802.16 WiMAX Driver or Output Stage
- 5GHz 802.11 WiFi and ISM Applications

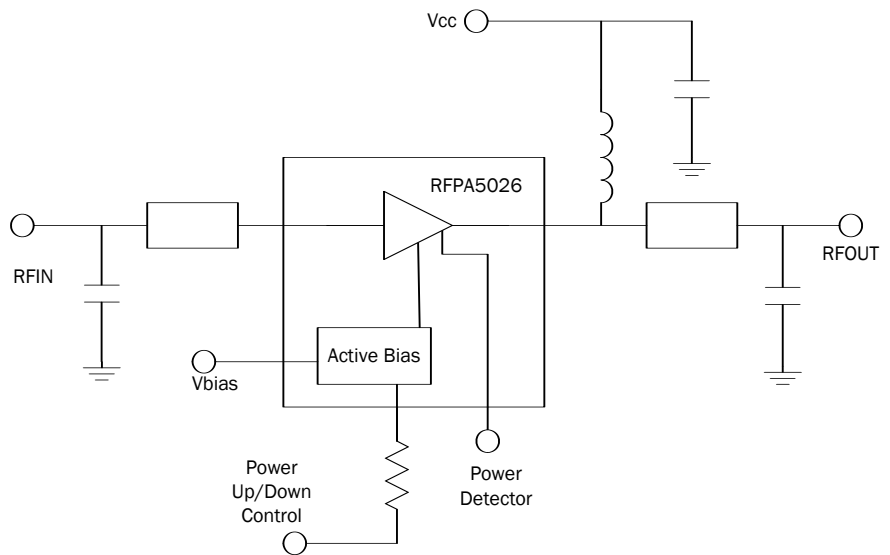

Functional Block Diagram

Product Description

RFMD's RFPA5026 is a high-linearity, single-stage, class AB Heterojunction Bipolar Transistor (HBT) power amplifier. It is designed with InGaP-on-GaAs device technology and fabricated with MOCVD for an ideal combination of low cost and high reliability. This product is specifically designed for use as a driver or final stage power amp for 802.16 equipment in the 4.9GHz to 5.9GHz bands. It is pre-matched on both ports to simplify external application circuit design. It features an input power detector, on/off power control, ESD protection, excellent overall robustness, and a hand reworkable and thermally enhanced surface-mount DFN package.

Ordering Information

RFPA5026SQ	Sample bag with 25 pieces
RFPA5026SR	7" reel with 100 pieces
RFPA5026TR7	7" reel with 1000 pieces
RFPA5026PCK-410	Eval Board with 5.15GHz to 5.35GHz Tune - 5 pc sample bag.
RFPA5026PCK-411	Eval Board with 5.75GHz to 5.9GHz Tune - 5 pc sample bag.

Absolute Maximum Ratings

Parameter	Rating	Unit
VC1 Collector Bias Current (I_{VC1})	1500	mA
Device Voltage (V_D)*	6.0	V
Power Dissipation (P_{DISS})	6	W
Operating Lead Temperature (T_L)	-40 to +85	°C
**Max RF output Power for 50Ω continuous long term operation	30	dBm
Max Modulated (***)OFDM RF Input Power for 50Ω output load	28	dBm
Max Modulated (***)OFDM RF Input Power for 10:1 VSWR output load	21	dBm
Storage Temperature Range	-40 to +150	°C
Operating Junction Temperature (T_J)	+150	°C
ESD Human Body Model	1000	V
Moisture Sensitivity Level	MSL 1	

*No RF Drive

**With specified application circuit

***Modulation schemes include 802.11a/g, 802.16

Operation of this device beyond any one of these limits may cause permanent damage. For reliable continuous operation, the device voltage and current must not exceed the maximum operating values specified in the table on page one.

Bias Conditions should also satisfy the following expression:

$$I_D V_D < (T_J - T_L) / R_{TH, j-l}$$



Caution! ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.



RFMD Green: RoHS compliant per EU Directive 2002/95/EC, halogen free per IEC 61249-2-21, < 1000ppm each of antimony trioxide in polymeric materials and red phosphorus as a flame retardant, and <2% antimony in solder.

Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
Frequency of Operation	4900		5900	MHz	
Output Power at 1dB Compression		32.5		dBm	5.9GHz
Small Signal Gain		8.8		dBm	5.9GHz
EVM at 25dBm Output Power		2.5		%	5.9GHz, 802.11a 54Mb/s
Third Order Suppression		-45.0		dBc	5.9GHz, P_{OUT} =23dBm per tone
Noise Figure		5.4		dB	5.9GHz
Worst Case Input Return Loss		19.0		dB	5.7 GHz to 5.9GHz
Worst Case Output Return Loss		13.0		dB	5.7 GHz to 5.9GHz
Power Detector Range	0.8		3.0	V	P_{OUT} =10dBm to 30dBm
Quiescent Current		602		mA	V_{CC} =5V
Power Up Control Current		2.7		mA	V_{PC} =5V
V_{CC} Leakage Current			10	μA	V_{CC} =5V, V_{PC} =0V
Thermal Resistance		14.0		°C/W	Junction-to-Lead


Test Conditions: Z_0 =50Ω, V_{CC} =5V, I_Q =602mA, T_{BP} =30°C

Typical 5V Performance with Appropriate App Circuit

($V_{CC} = 5V$, $I_{CQ} = 602mA$, 802.11a 54 Mb/s)

Parameter	Units	5.15GHz	5.35GHz	5.7GHz	5.9GHz
Gain at $P_{OUT}=26dBm$	dB	8.8	9.0	9.4	8.8
P1dB	dBm	32.7	32.2	33.2	32.5
P_{OUT} at 2.5% EVM	dBm	25.3	25.1	25.3	25.0
Current at P_{OUT} 2.5% EVM	mA	632	631	670	670
Input Return Loss	dB	10	13	19	19
Output Return Loss	dB	15	13	15	13
Output Return Loss	dB	16.0	16.0	17.0	15.0

Pin Out

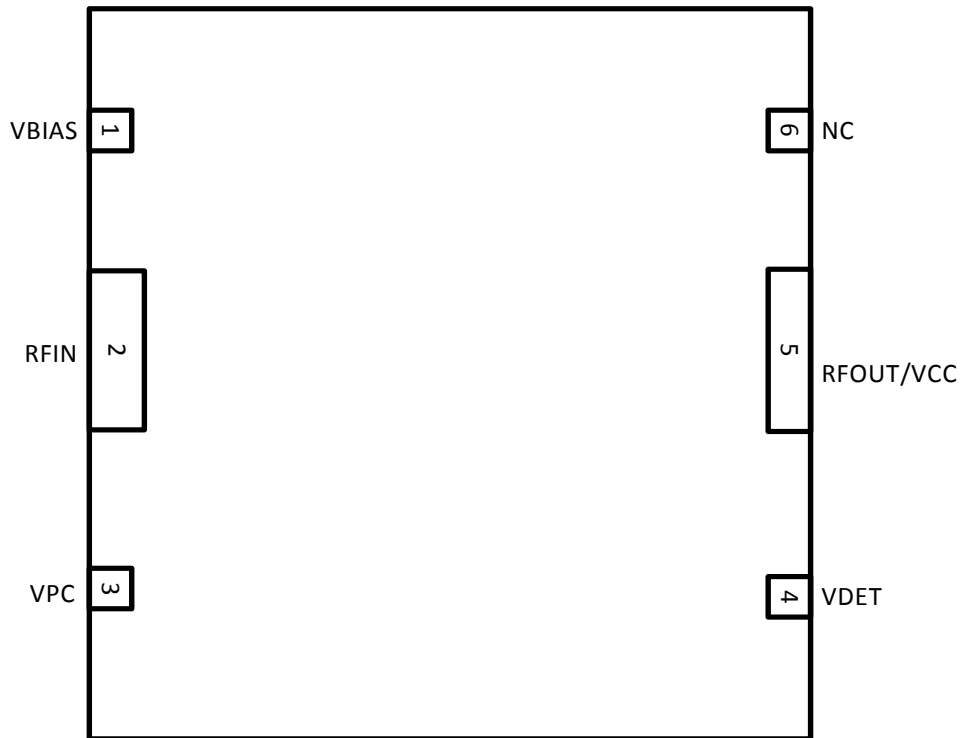


Pin	Function	Description
1	VBIAS	This is the supply voltage for the active bias circuit.
2	RF IN	This is the RF input pin and has a DC voltage present. An external DC block is required.
3	VPC	Power up/down control pin. The voltage on this pin should never exceed the voltage on pin 1 by more than 0.5V unless the supply current from pin 3 is limited < 10mA.
4	VDET	This is the output port for the power detector. It samples the power at the input of the amplifier.
5	RF OUT/VCC	This is the RF output pin and DC connection to the collector.
6	NC	This pin is not connected internal to the package. Buss it to pin 5 as shown on the app circuit to achieve the specified performance.
GND	GND	These pins are DC connected to the backside paddle. They provide good thermal connection to the backside paddle for hand soldering and rework. Many thermal and electrical GND vias are recommended as shown in the landing pattern.


5.15GHz to 5.35GHz Application Circuit Data

($V_{CC}=V_{PC}=5.0V$, $I_Q=563mA$)


Typical EVM versus P_{OUT} F=5.15GHz
802.11g, OFDM 54Mb/s, 64QAM

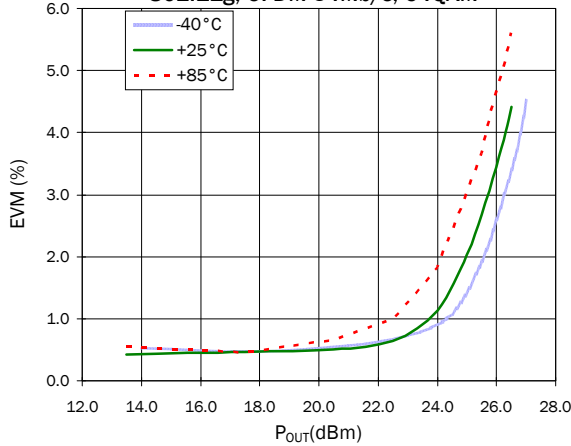


Typical EVM versus P_{OUT} F=5.35GHz
802.11g, OFDM 54Mb/s, 64QAM

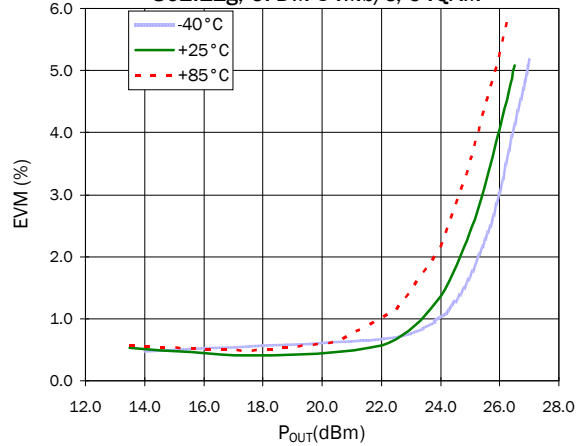


IM3 versus P_{OUT} (2 Tone Avg), T=+25°C
Tone Spacing = 1MHz

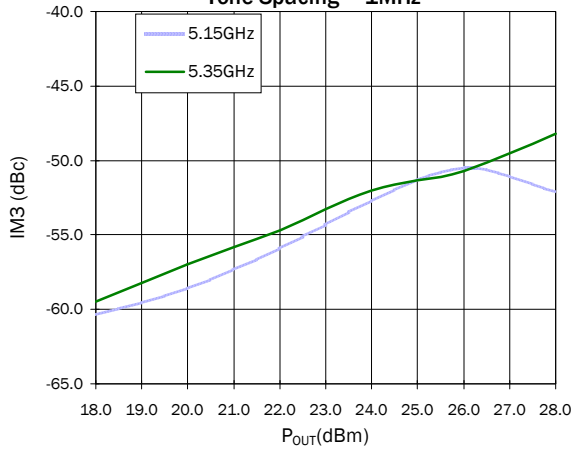


Typical Forward Gain versus P_{OUT} , T=+25°C

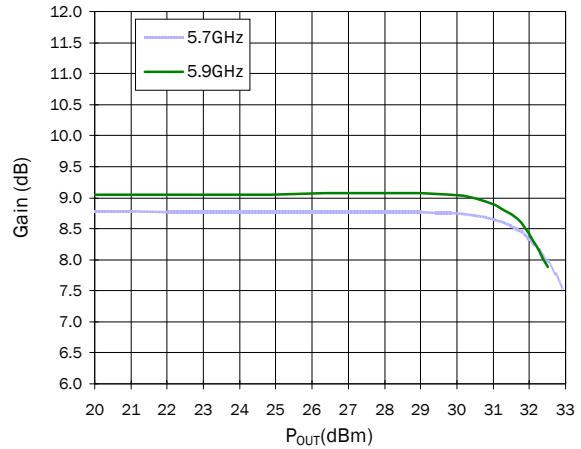

Typical Forward Gain versus P_{OUT} , F=5.15GHz

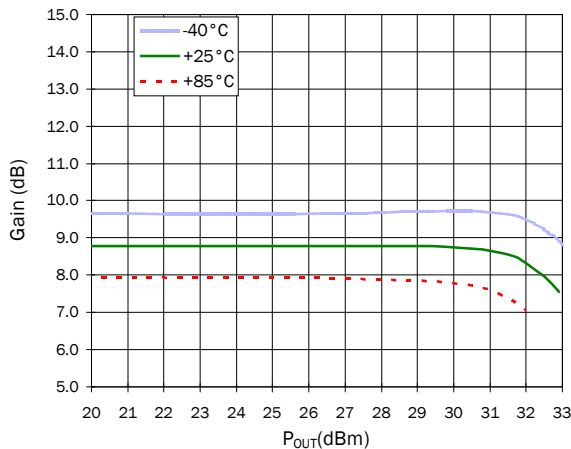


Typical Forward Gain versus P_{OUT} , F=5.35GHz

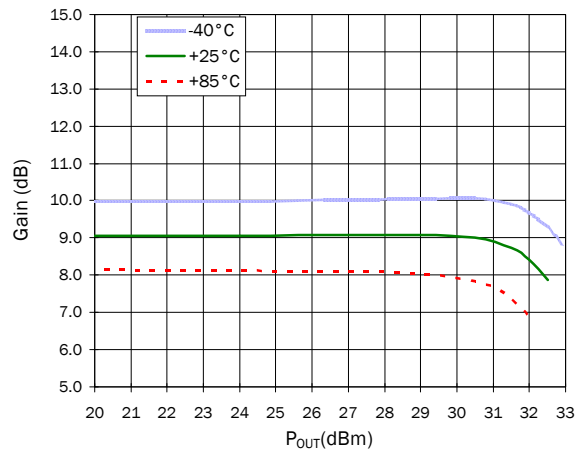


5.15GHz to 5.35GHz Application Circuit Data

($V_{CC}=V_{PC}=5.0V$, $I_Q=563mA$)


Narrowband S11 - Input Return Loss

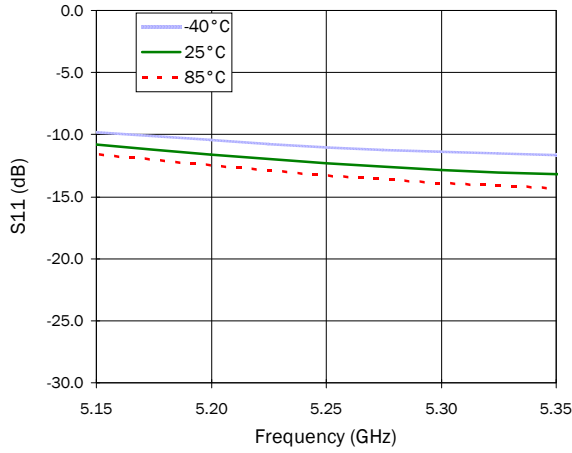


Narrowband S21 - Forward Gain

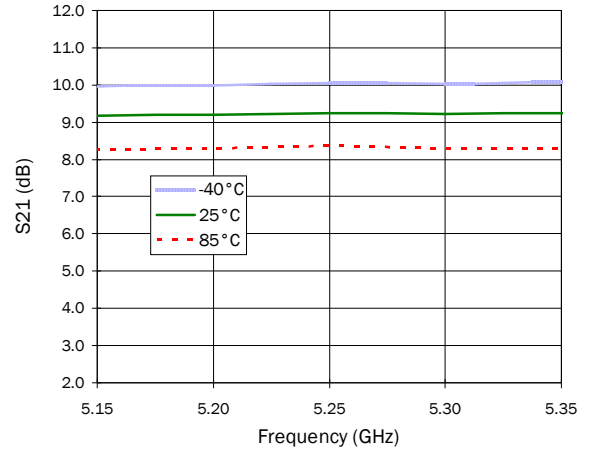

Narrowband S12 - Reverse Isolation

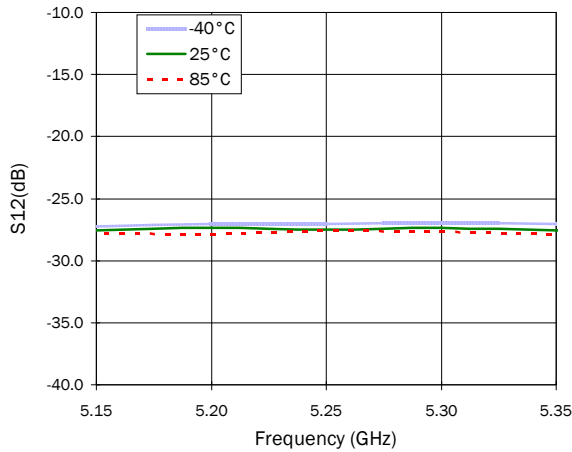


Narrowband S22 - Output Return Loss

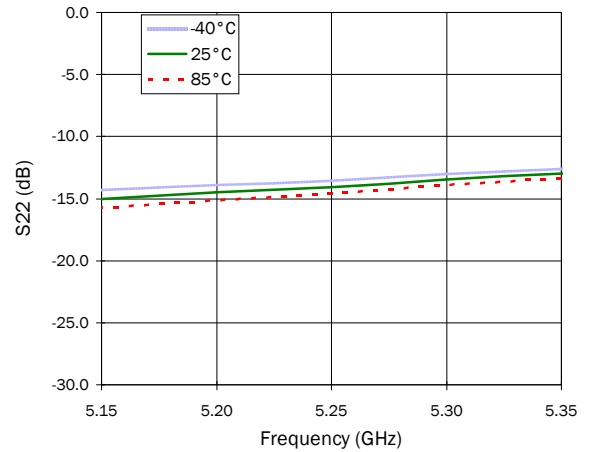


5.15GHz to 5.35GHz Application Circuit Data

($V_{CC}=V_{PC}=5.0V$, $I_Q=563mA$)


Broadband S11 - Input Return Loss

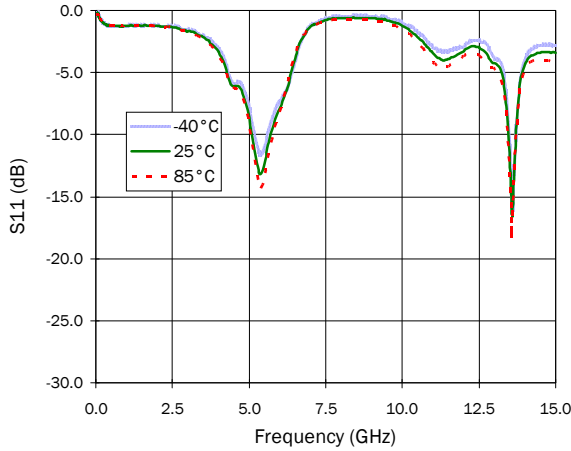


Broadband S21 - Forward Gain

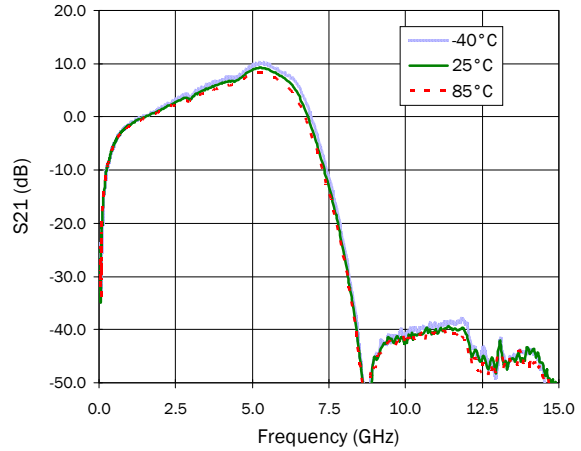

Broadband S12 - Reverse Isolation

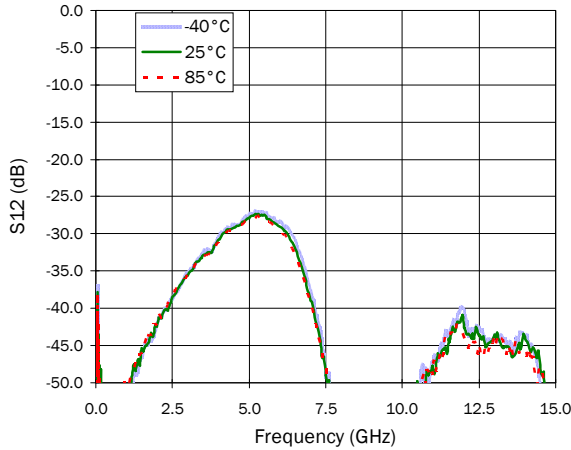


Broadband S22 - Output Return Loss

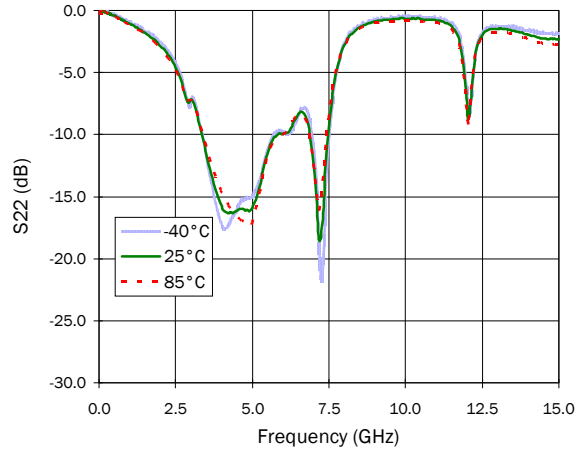


5.15GHz to 5.35GHz Application Circuit Data

($V_{CC}=V_{PC}=5.0V$, $I_Q=563mA$)


DC Supply Current versus P_{OUT} , $T=+25^\circ C$

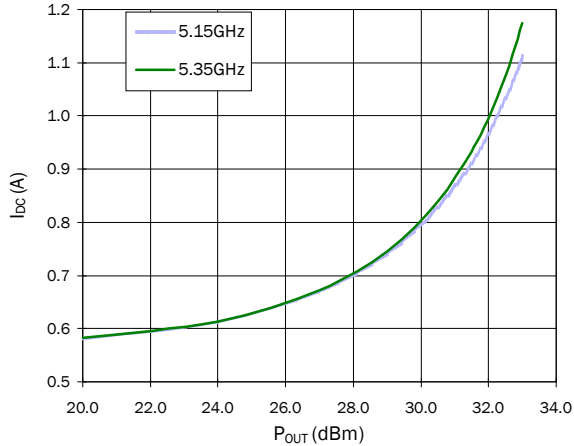


Noise Figure F=5.15GHz to 5.35GHz

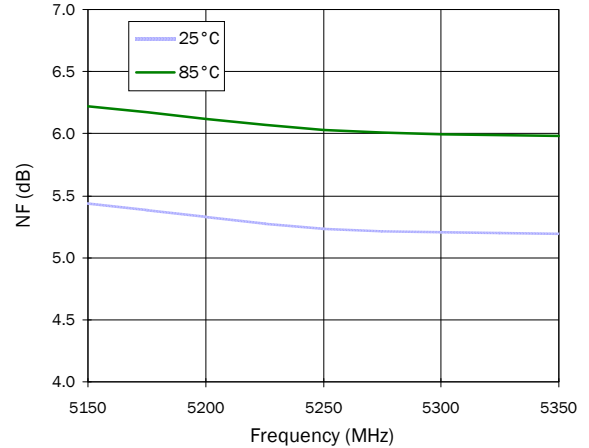

RF Power (V_{DET}) versus P_{OUT} F=5.15GHz

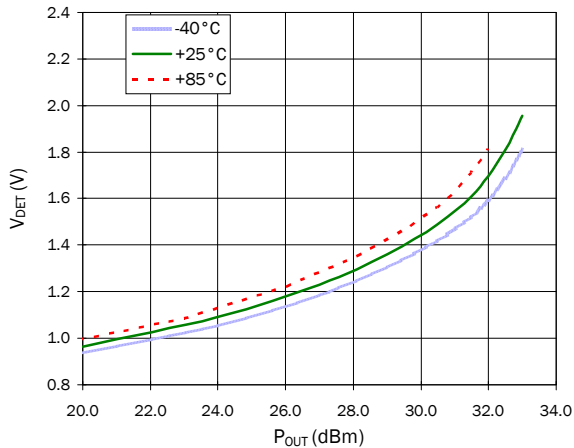


RF Power (V_{DET}) versus P_{OUT} F=5.35GHz

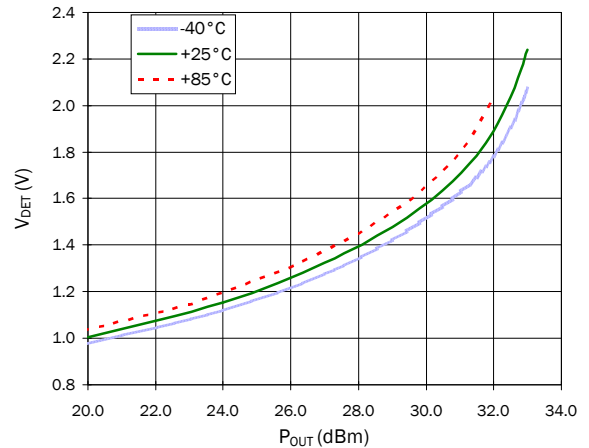


5.7GHz to 5.9GHz Application Circuit Data

($V_{CC}=V_{PC}=5.0V$, $I_Q=602mA$)


Typical EVM versus P_{OUT} F=5.7GHz
802.11g, OFDM 54Mb/s, 64QAM

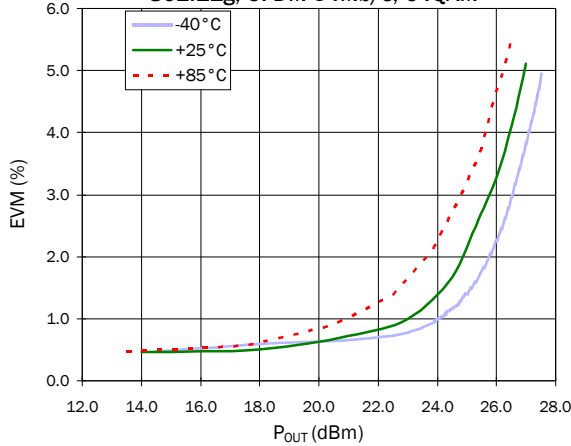


Typical EVM versus P_{OUT} F=5.9GHz
802.11g, OFDM 54Mb/s, 64QAM

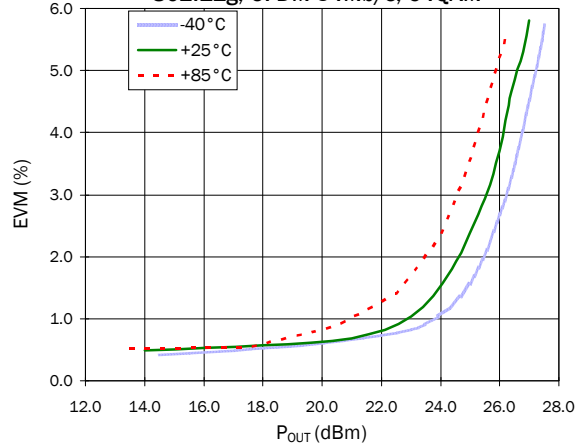


IM3 versus P_{OUT} (2 Tone Avg), T=+25°C
Tone Spacing = 1MHz

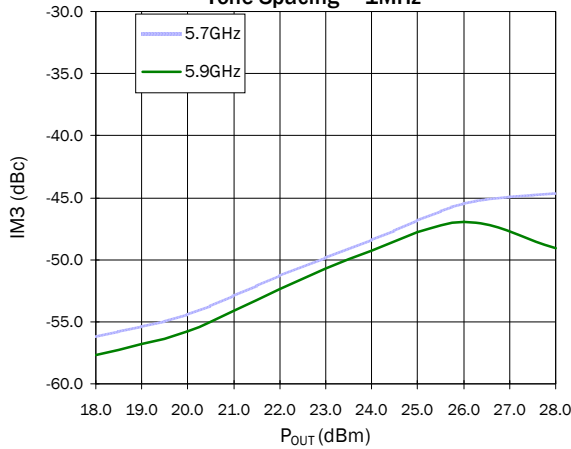


Typical Forward Gain versus P_{OUT} , T=+25°C

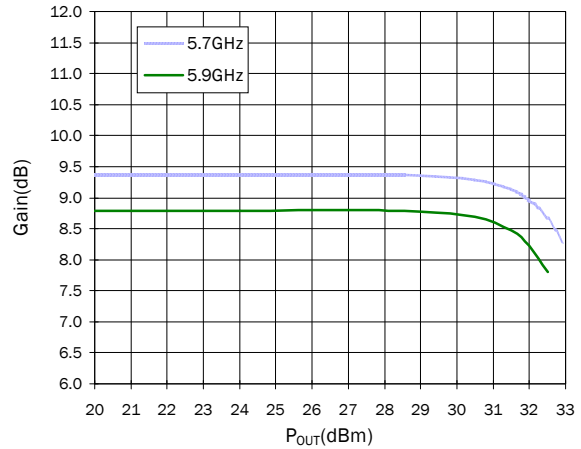

Typical Forward Gain versus P_{OUT} , F=5.7GHz

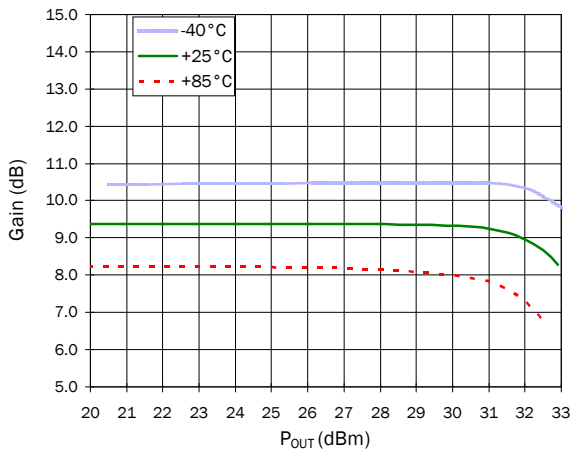


Typical Forward Gain versus P_{OUT} , F=5.9GHz

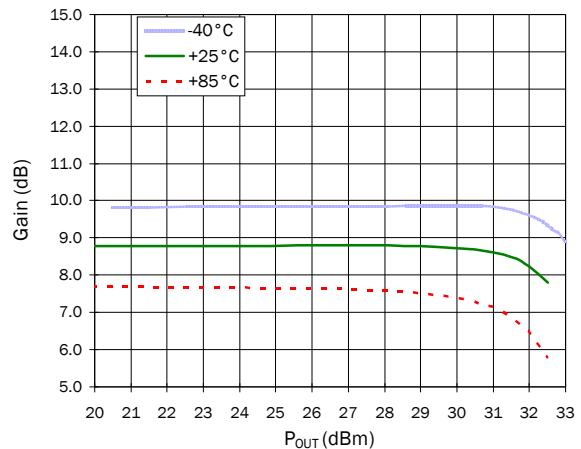


5.7GHz to 5.9GHz Application Circuit Data

($V_{CC}=V_{PC}=5.0V$, $I_Q=602mA$)


Narrowband S11 - Input Return Loss

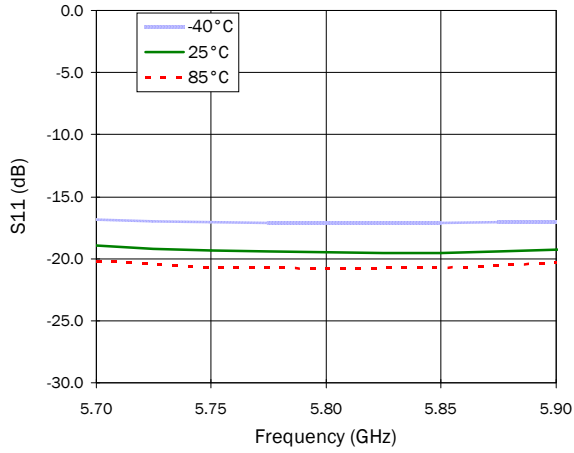


Narrowband S21 - Forward Gain

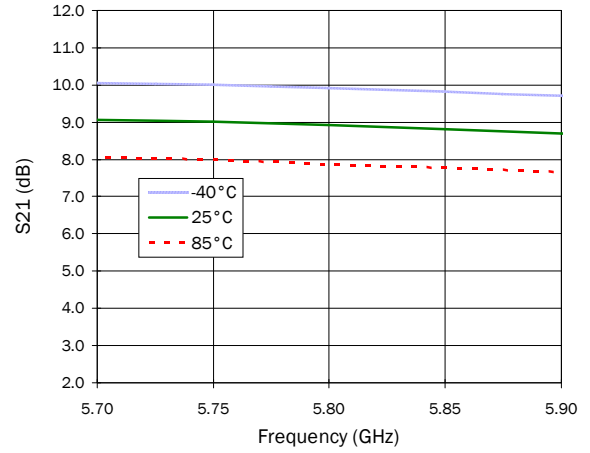

Narrowband S12 - Reverse Isolation

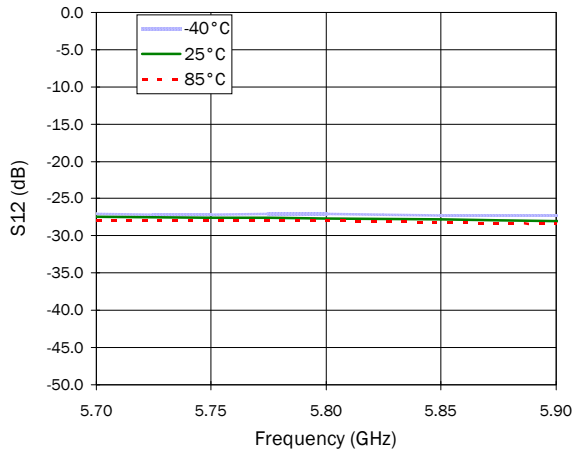


Narrowband S22 - Output Return Loss

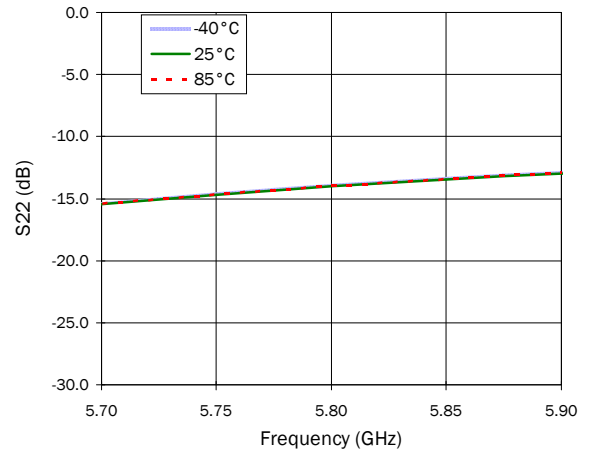


5.7GHz to 5.9GHz Application Circuit Data

($V_{CC}=V_{PC}=5.0V$, $I_Q=602mA$)


Broadband S11 - Input Return Loss

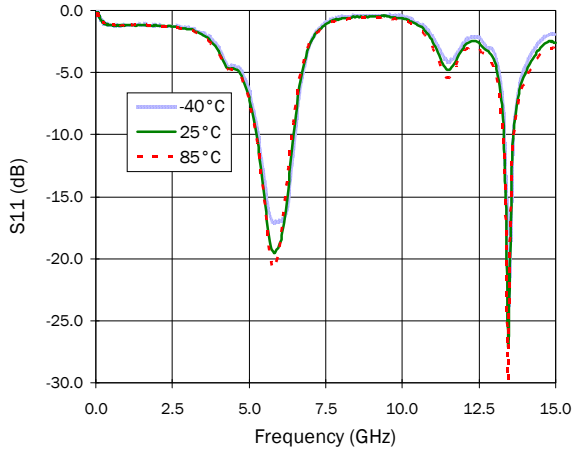


Broadband S21 - Forward Gain

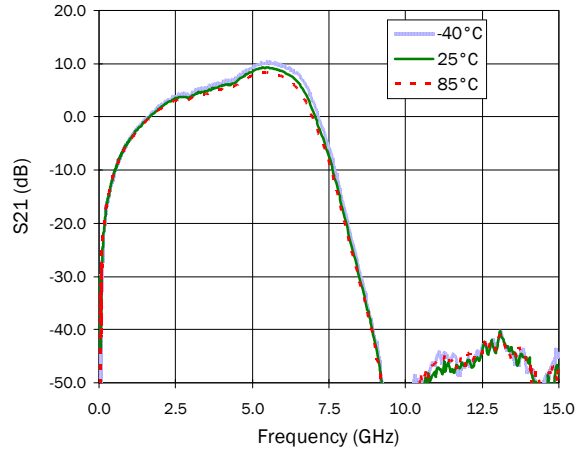

Broadband S12 - Reverse Isolation

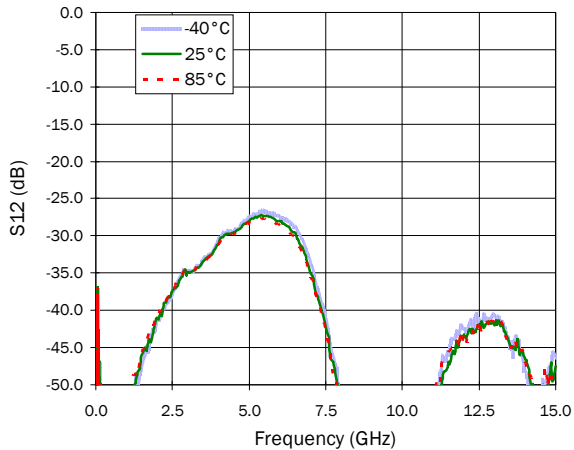


Broadband S22 - Output Return Loss

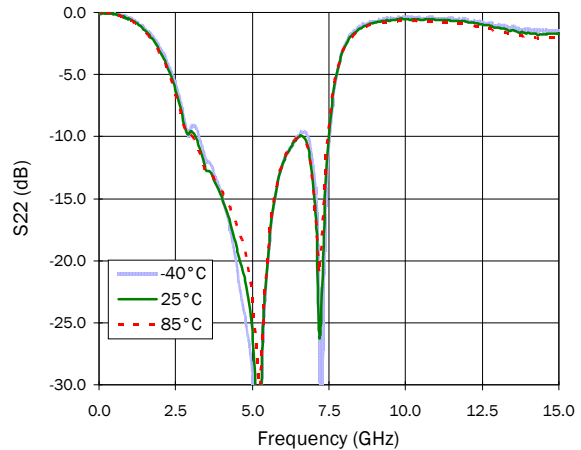


5.7GHz to 5.9GHz Application Circuit Data

($V_{CC}=V_{PC}=5.0V$, $I_Q=602mA$)


DC Supply Current versus P_{OUT} , F=5.9GHz

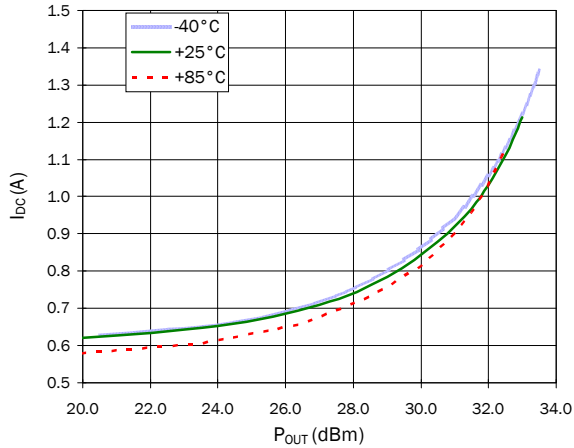


Noise Figure F=5.7GHz to 5.9GHz

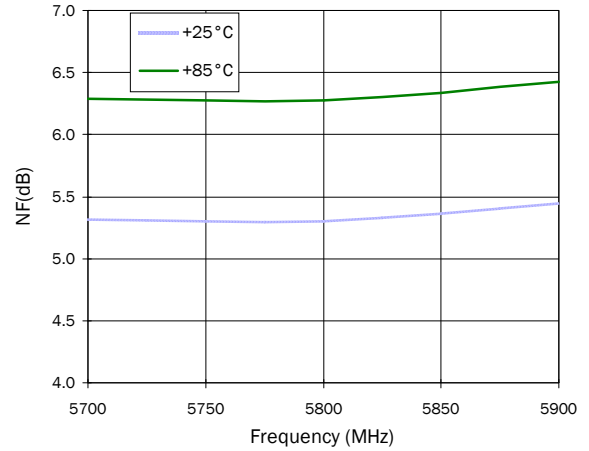

RF Power (V_{DET}) versus P_{OUT} F=5.7GHz

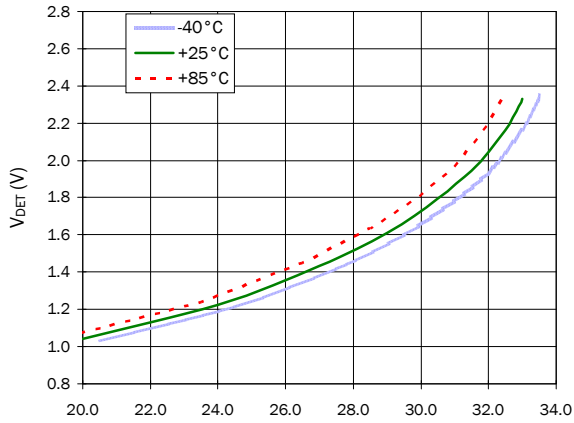


RF Power (V_{DET}) versus P_{OUT} F=5.9GHz

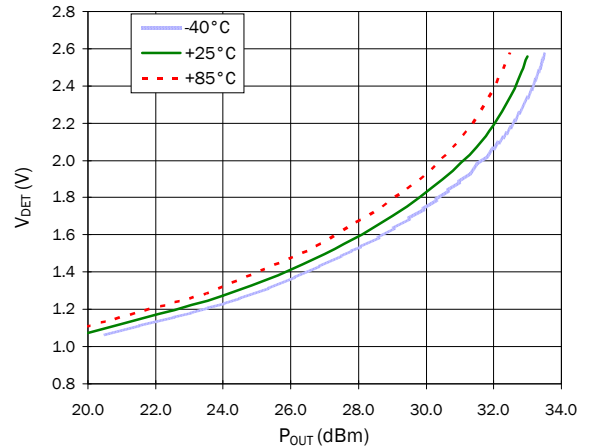


Evaluation Board Schematic

5.15GHz to 5.35GHz Evaluation Board Schematic for $V^+ = V_{CC} = V_{PC} = 5.0V$, $I_Q = 563mA$

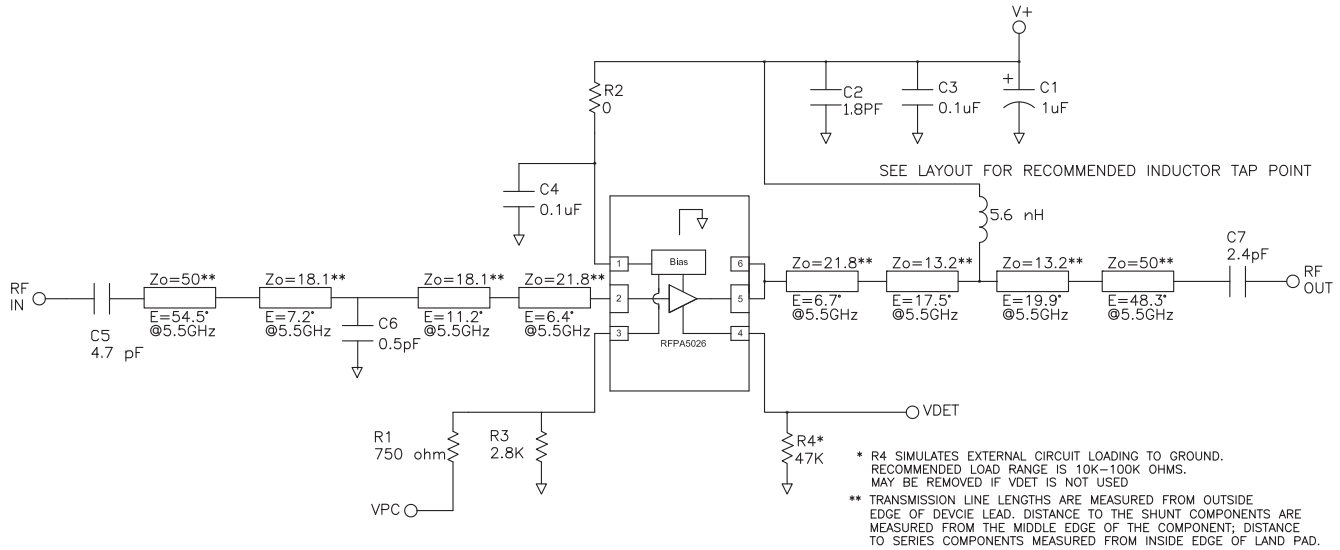

Evaluation Board Layout and Bill of Materials

5.15GHz to 5.35GHz Evaluation Board Layout for $V_{+} = V_{CC} = V_{PC} = 5.0V$, $I_Q = 563mA$

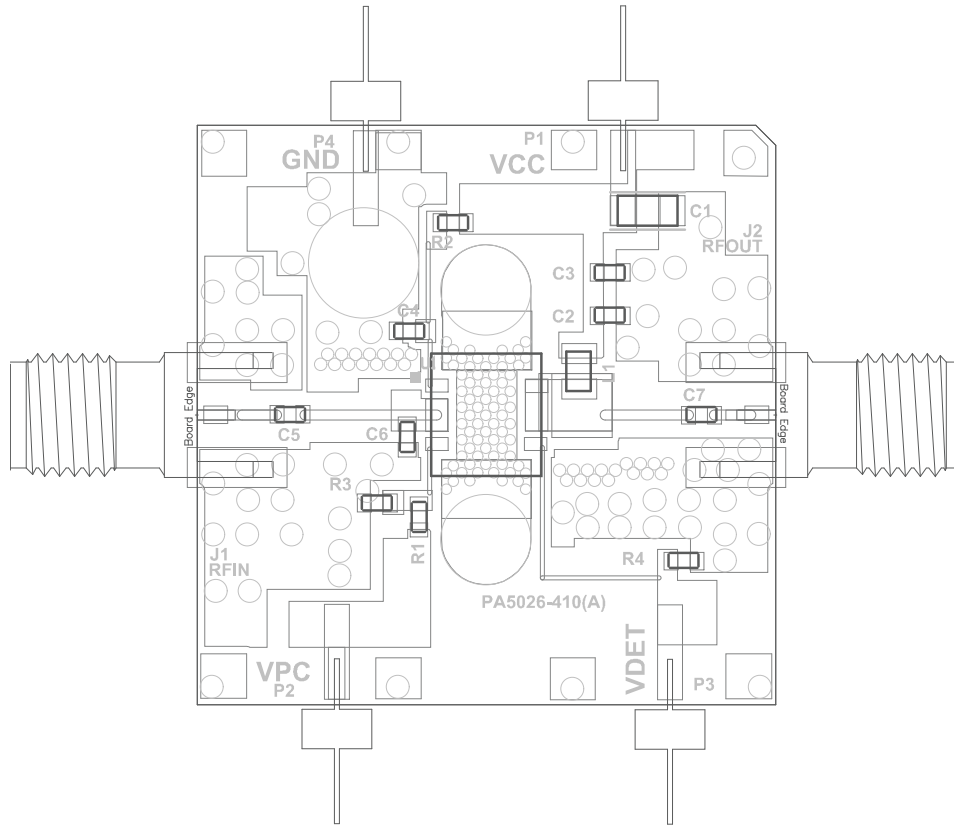


PCB Notes: Do not use less than the recommended number of via holes under the device ground paddle. RF layers thicker than 0.020 inches (0.5mm) not recommended.

Bill of Materials

DESG	Description	Notes
Q1	RFPA5026	DFN
R1	750 Ω , 0603 1%	0402 may be used.
R2	0 Ω , 0603	0402 may be used.
R3	2.80K Ω , 0603 1%	0402 may be used.
R4	47K Ω , 0603	0402 may be used.
C1	1 μ F 16V MLCC CAP	Tantulum ok for EVM performance. Use MLCC type for best IM3 levels.
C2	1.8pF CAP, 0603	NPO, ROHM MCH185A1R8DK or equiv.
C3, 4	0.1 μ F CAP, 0603	X7R 0402 ok, ROHM MCH182CN104K or equiv.
C5	4.7pF CAP, 0603	NPO, low ESR, ATC 600S4R7CW250 or equiv.
C6	0.7pF CAP, 0603	NPO, low ESR, ATC 600S0R7CW250 or equiv.
C7	5.6pF CAP, 0603	NPO, low ESR, ATC 600S5R6CW250 or equiv.
L1	5.6nH IND, 0805	Coilcraft 0805-HQ-5N6XJBB


Evaluation Board Schematic

5.7GHz to 5.9GHz Evaluation Board Schematic for $V^+ = V_{CC} = V_{PC} = 5.0V$, $I_Q = 602mA$

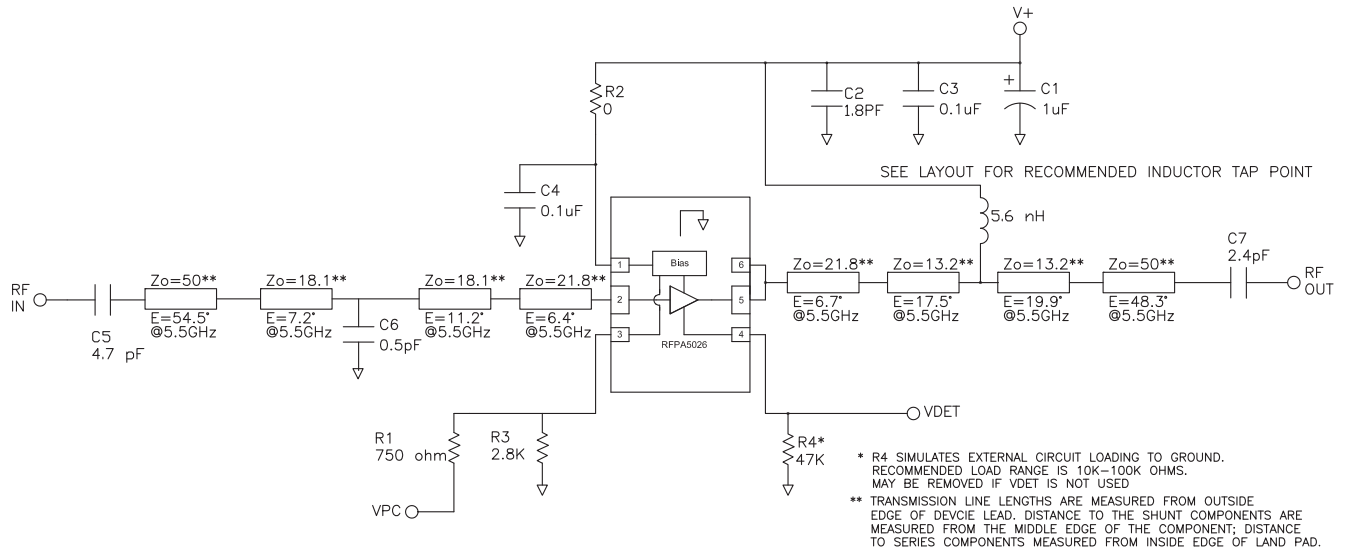

Evaluation Board Layout and Bill of Materials

5.7 GHz to 5.9GHz Evaluation Board Layout for $V_+ = V_{CC} = V_{PC} = 5.0V$, $I_Q = 602mA$

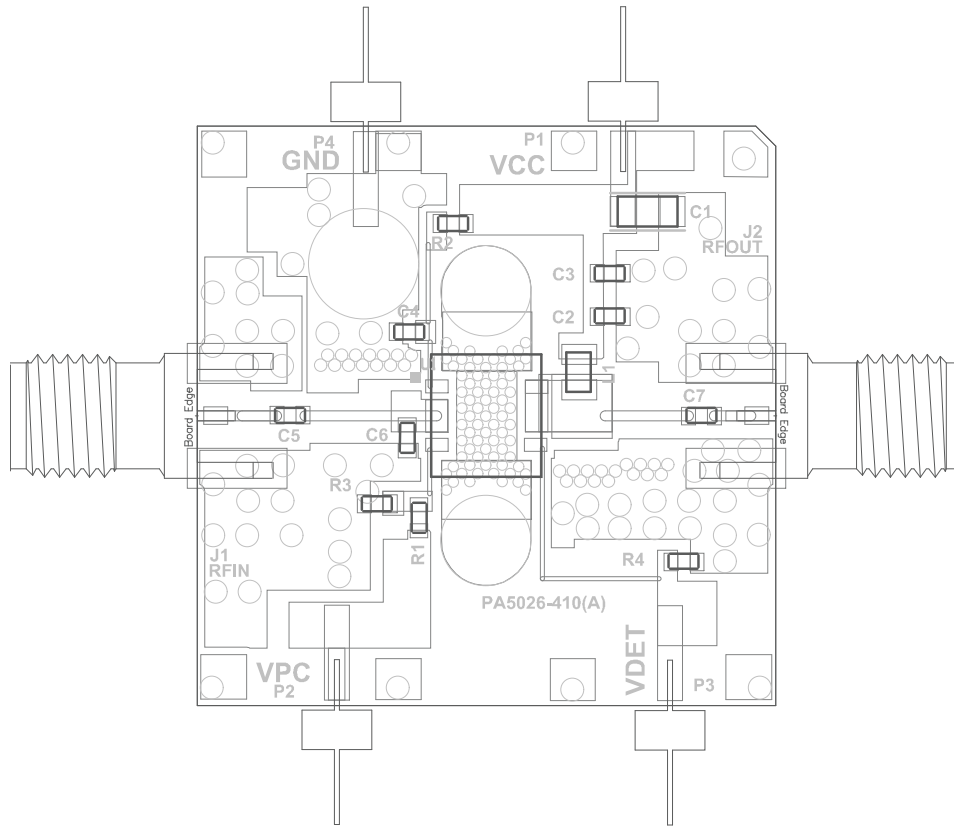


Bill of Materials

DESG	Description	Notes
Q1	RFPA5026	DFN
R1	750 Ω , 0603 1%	0402 may be used.
R2	0 Ω , 0603	0402 may be used.
R3	2.80K Ω , 0603 1%	0402 may be used.
R4	47K Ω , 0603	0402 may be used.
C1	1uF 16V MLCC CAP	Tantulum ok for EVM performance. Use MLCC type for best IM3 levels.
C2	1.8pF CAP, 0603	NPO, ROHM MCH185A1R8DK or equiv.
C3, 4	0.1uF CAP, 0603	X7R 0402 ok, ROHM MCH182CN104K or equiv.
C5	4.7pF CAP, 0603	NPO, low ESR, ATC 600S4R7CW250 or equiv.
C6	0.5pF CAP, 0603	NPO, low ESR, ATC 600S0R5CW250 or equiv.
C7	2.4pF CAP, 0603	NPO, low ESR, ATC 600S2R4CW250 or equiv.
L1	5.6nH IND, 0805	Coilcraft 0805-HQ-5N6XJBB

Package Drawing

Dimensions in millimeters (inches)


Refer to drawing posted at www.rfmd.com for tolerances.

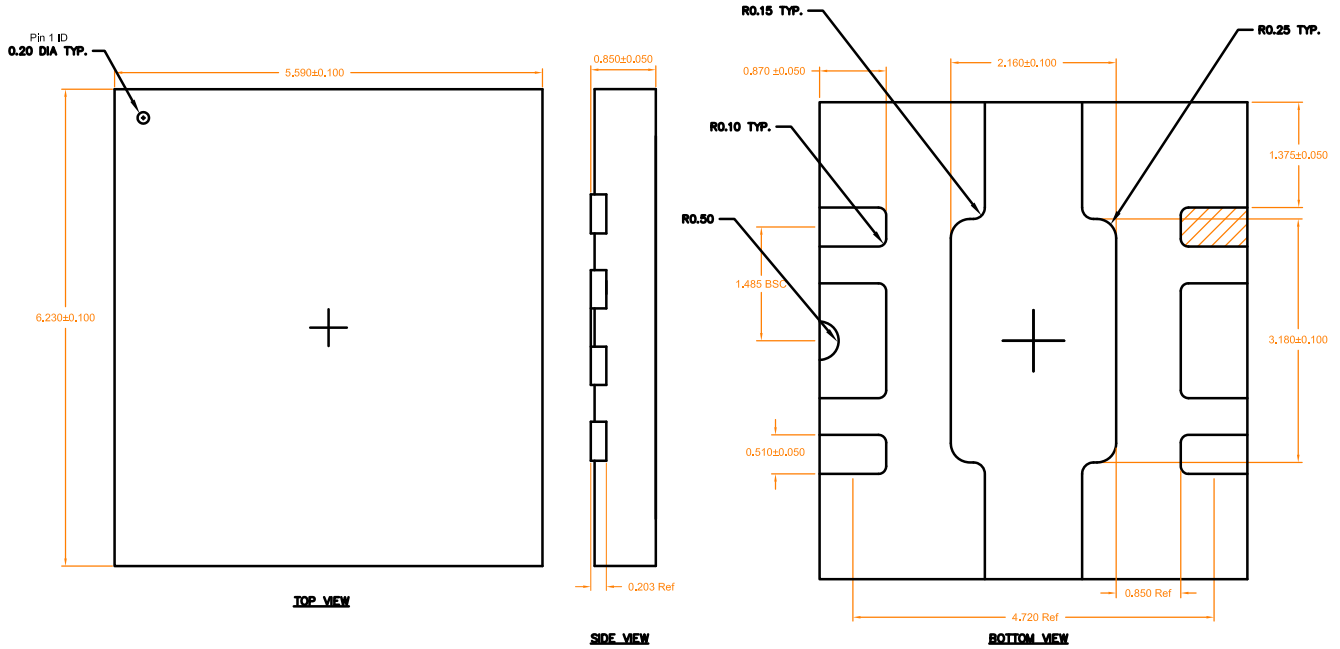

Shaded area represents Pin 1.

Recommended Soldermask Pattern

Dimensions in millimeters (inches)

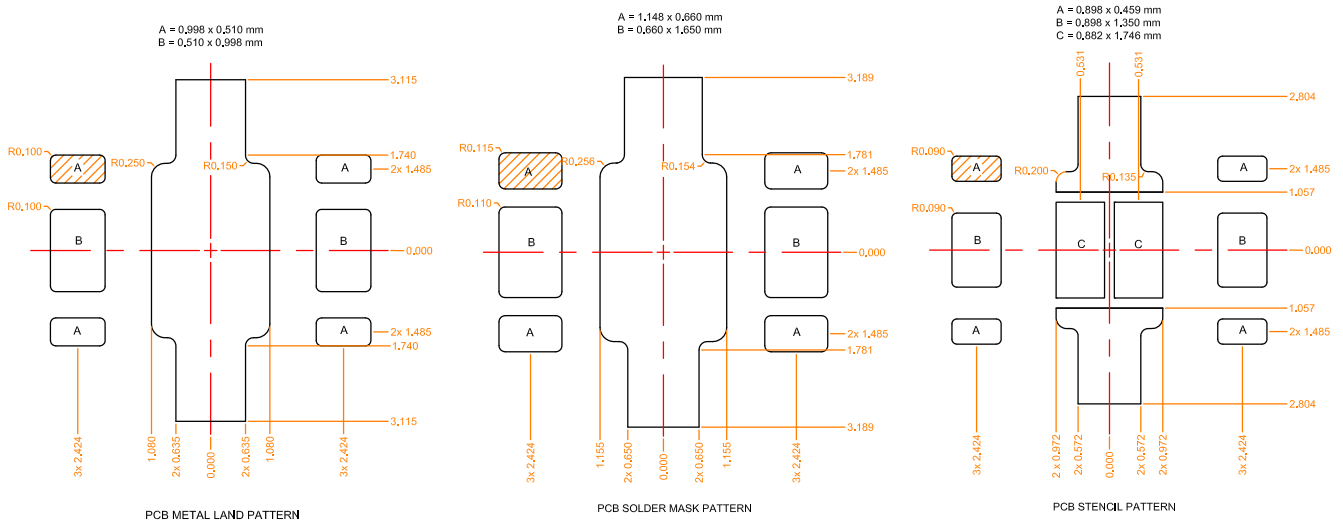

Shaded area represents Pin 1 location.