
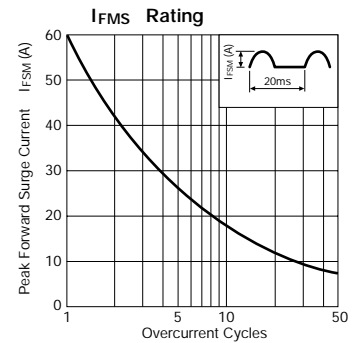
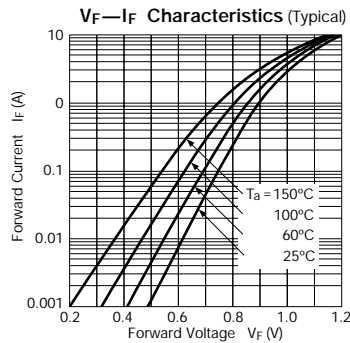





Damper Diodes (For TV)

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta = 25°C)						Others			
	V _{RM} (V)	I _{F(AV)} (A)	I _{FSM} (A) 50Hz Half-cycle Sinewave Single Shot	T _J (°C)	T _{stg} (°C)	V _F (V)		I _R (μA)	I _{R(H)} (μA)	t _{rr} (1) (μs)	t _{rr} (2) (μs)	R _{th(j-ℓ)} (°C/W)	Mass (g)	Fig.	
						max	I _F (A)	V _R = V _{RM} max	V _R = V _{RM} Ta = 100°C max	I _F /I _{RP} (mA)	I _F /I _{RP} (mA)				
RH 10F	1500	0.8	60	-40 to +150		1.0	1.0	10	500	4.0	1.3	100/200	15.0	0.44	(A)
RH 2D	1300	1.0											12.0	0.6	(B)
RH 2F	1500	2.5	50			1.3	2.5	50					10.0	1.0	(C)
RH 3F	1600														
RH 3G	1600														
RH 4F	1500														




RH 10F, 2D, 2F



RH 3F, 3G

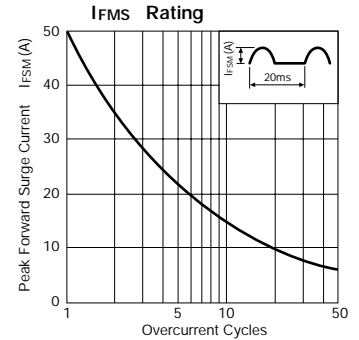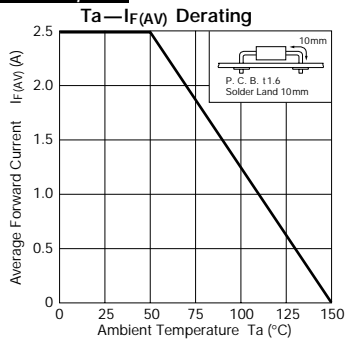

RH 4F

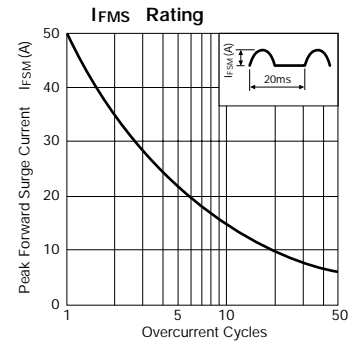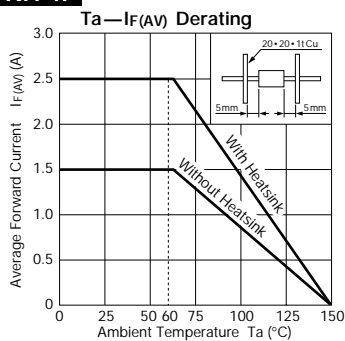

External Dimensions (Unit: mm)

Flammability:
UL94V-0 or Equivalent

