


|                |                                 | RATED OPERATING VOLTAGE (kV PEAK) |         |        |        | 12 or 115 VDC coil versions available for model RJ5B-26S; please contact factory for lead times.<br>For available flange versions, the flange diameter is 1.125" |                         |                          |                       |                       |                              |                               |                          |                               |                            |                                          |                     |
|----------------|---------------------------------|-----------------------------------|---------|--------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------------------------|-----------------------|-----------------------|------------------------------|-------------------------------|--------------------------|-------------------------------|----------------------------|------------------------------------------|---------------------|
|                |                                 | MAX CONT. CURRENT (Amps)          |         |        |        | CONTACT CAPACITY (pF)                                                                                                                                            |                         |                          |                       |                       |                              |                               |                          |                               |                            |                                          |                     |
| PRODUCT NUMBER | TEST VOLTAGE (kV PEAK)<br>60 Hz | DC OR 60Hz                        | 2.5 MHz | 16 MHz | 32 MHz | OPEN CONTACT TO OPEN CONTACT                                                                                                                                     | OPEN CONTACTS TO GROUND | MAX CONTACT RESIST. (mΩ) | MAX OPERATE TIME (ms) | MAX RELEASE TIME (ms) | PULL-IN VOLTAGE @ 25°C (Vdc) | DROP-OUT VOLTAGE @ 25°C (Vdc) | COIL RESISTANCE (Ω ±10%) | SHOCK, 11ms ½ SINE (PEAK g's) | VIBRATION PEAK g's @ FREQ. | MECHANICAL LIFE (10 <sup>6</sup> CYCLES) | WEIGHT, oz. (grams) |
| RJ9B-26S†      | 20                              | 15                                | 13      | 10     | —      | 3                                                                                                                                                                | 3.5                     | 10                       | 30                    | 8                     | 16                           | 1-10                          | 190                      | 50                            | 10 @ 55-500 Hz             | 1                                        | 11 (312)            |
|                |                                 | 110                               | 50      | 20     | —      |                                                                                                                                                                  |                         |                          |                       |                       |                              |                               |                          |                               |                            |                                          |                     |
| RJ5B-26S       | 30                              | 25                                | —       | —      | —      | 6                                                                                                                                                                | 3                       | 50                       | 20                    | 15                    | 18                           | 1-10                          | 167                      | 20                            | 10 @ 55-500 Hz             | 1                                        | 12 (340)            |
|                |                                 | 10                                | —       | —      | —      |                                                                                                                                                                  |                         |                          |                       |                       |                              |                               |                          |                               |                            |                                          |                     |

## RJ9B-26S†

Form:  
SPDT



Equipped with integral flange

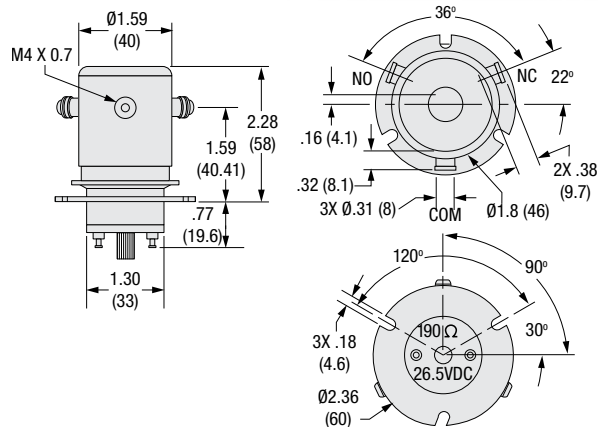

## RJ5B-26S

Form:  
SPDT

Flange Version Available:  
None

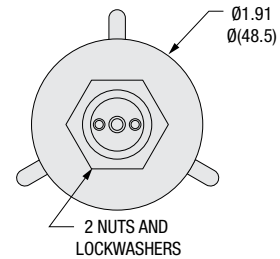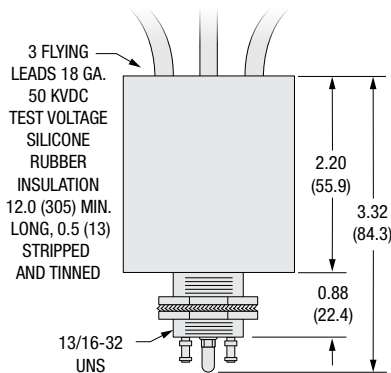

† Can be used for hot switch applications.

