



NUMBER:RD-SDRJG-001TC1

DATE : 2005/11/18 -R(REV:A1)

Single 10/100/1000 BASE-TX Filtered Connector Module

MODEL NO. : RJG-001TC1

Features :

RoHS Compliant

Fully shielded magnetics protect data from internally generated digital noise

Reduces the overall length of the signal path for improved common mode performance

Implements full common mode termination scheme with used and unused twisted pairs

Meets IEEE802.3 Baseline Wander Compensation specification

Integrates high voltage capacitor to chassis ground

Supports all major transceivers with matched turns ration and complete integration of specified termination

Design for 100base-tx transmission over UTP-5 cable

Operating TEMP. range:-40 to +85


Storage TEMP. range:-55 to +125

Primary OCL inductance: 350 μ H MIN. at 100KHz/0.1Vrms 8mA DC bias

Typical Performance Characteristics @ 25

Insertion Loss (dB MAX)	Return Loss (dB Min @100Ω±15Ω)				Differential to Common Mode Rejection (dB MIN)	Cross talk (dB MIN)					CMRR (dB MIN)	Isolation Voltage (Vrms min)
MHz	MHz				MHz	MHz					MHz	1500
1~100	1~30	40	60	80~100	1~100	20	40	60	80	100	1~100	
-1.0	-16	-14	-12	-10	-33	-47	-40	-37	-35	-33	-30	

Schematic: Design on MDI Interface Circuitry

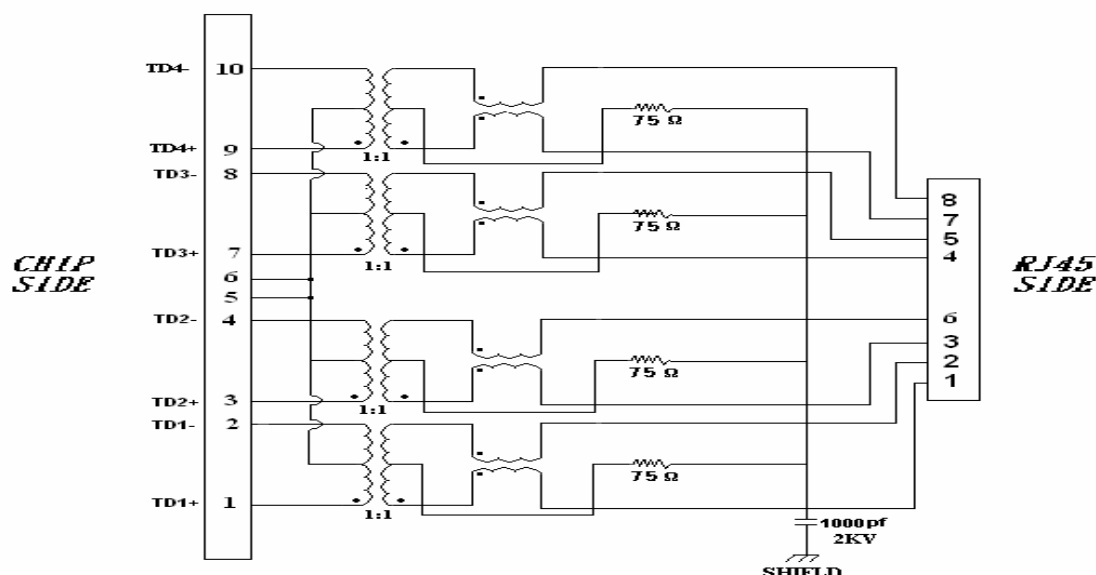


TAIMAG

NUMBER:RD-SDRJG-001TC1
DATE : 2005/11/18 -R(REV:A1)


MODEL NO. : RJG-001TC1

Dimension: mm

TOLERANCE:±0.15 (Unless otherwise specified)

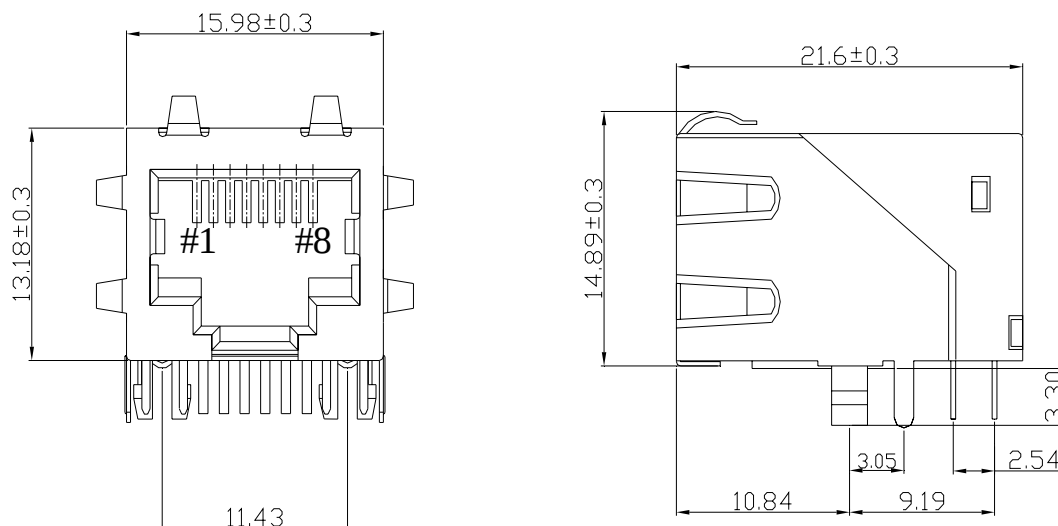

www.DataSheet4U.com

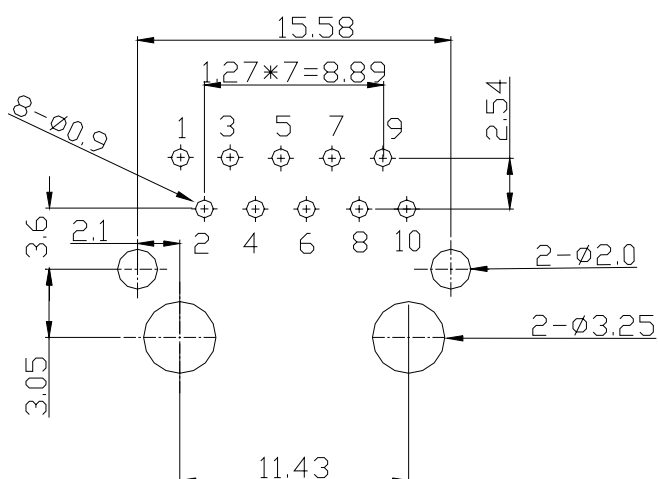

**RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE OF BOARD**



NUMBER:RD-SDRJG-001TC1
DATE : 2005/11/18 -R(REV:A1)

MODEL NO. : RJG-001TC1

Ordering Information

R J G - 0 0 1 T C 1	
R J 4 5	Series N O .
1 0 0 0 B a s e	

Requirements :

1.Design and Construction

Product shall be of design, construction and physical dimensions specified on applicable product drawing.

2.Materials and Finish

A. Contact:

RJ Contact : Phosphor Bronze, Thickness=0.30mm

Finish : Contact Area : 6μ"min. Gold over 50μ"min. Nickel

RJ Joint Contact : Brass, Thickness=0.30mm

Finish : 80μ"min. Sn over 50μ"min. Nickel

B. Plastic Part :

(1) Set Housing : Thermoplastic, PBT, Black

UL FILE NO. : E107536

Manufacturer : SHIKONG SYNTHETIC FIBERS CORP.

Grade : E202G30BK

Flame Class : UL 94V-0

(2) Insert : Thermoplastic, PBT, Black

UL FILE NO. : E107536

Manufacturer : SHIKONG SYNTHETIC FIBERS CORP.

Grade : E202G30BK

Flame Class : UL 94V-0

(3) Spacer : Thermoplastic, PBT, Black

UL FILE NO. : E107536

Manufacturer : SHIKONG SYNTHETIC FIBERS CORP.

Grade : E202G30BK

Flame Class : UL 94V-0



NUMBER:RD-SDRJG-001TC1
DATE : 2005/11/18 -R(REV:A1)

MODEL NO. : RJG-001TC1

C. Shield Material :

Cartridge Thickness=0.25mm

10 μ "-20 μ " Thick Nickel over Brass

3. Ratings

(1) Voltage rating : 125 VAC

(2) Current rating : 1.5A

Durability :

- (1) 1000 cycles with no function damage for RJ-45 . Abnormalities shall be present after the test.
- (2) Low Level Contact Resistance : $\Delta R=30m\Omega$ maximum (final).
- (3) The sample should be mounted in the tester and fully mated and unmated 500 times per hour at the rate of 25mm/min. EIA-364-09C.




NUMBER:RD-SDRJG-001TC1
DATE : 2005/11/18 -R(REV:A1)

MODEL NO. : RJG-001TC1

1. Unit weight :5.7 grams
2. package : 100 pcs / tray / 0.61 kgms
3. Carton : 1000 pcs / 10 layers of tray
4. Gross weight : 6.6455 kgms

Package drawing:

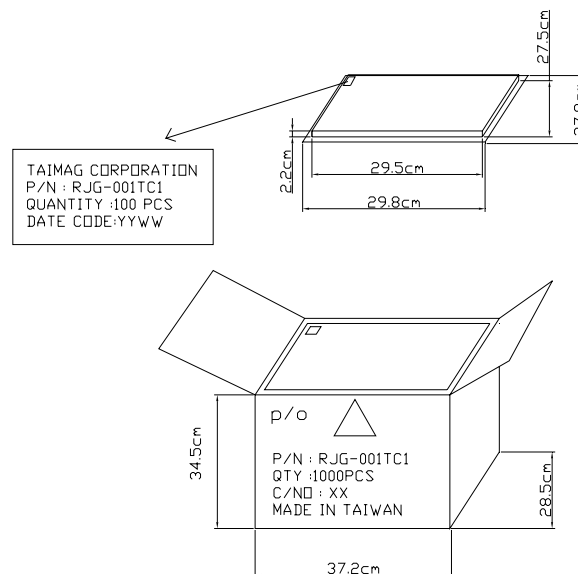



NUMBER:RD-SDRJG-001TC1
DATE : 2005/11/18 -R(REV:A1)

MODEL NO. : RJG-001TC1

REV.	Revision Description	DATE
A1	First Release	2005/11/18