



Thick Film Chip Resistors (Standard)

Document No

TRM-XX0S001B

Issued date

2003/5/14


page

1 / 12

1. Scope :

This specification applies for the RM series of thick film chip resistors made by TA-I.

2.Construction:

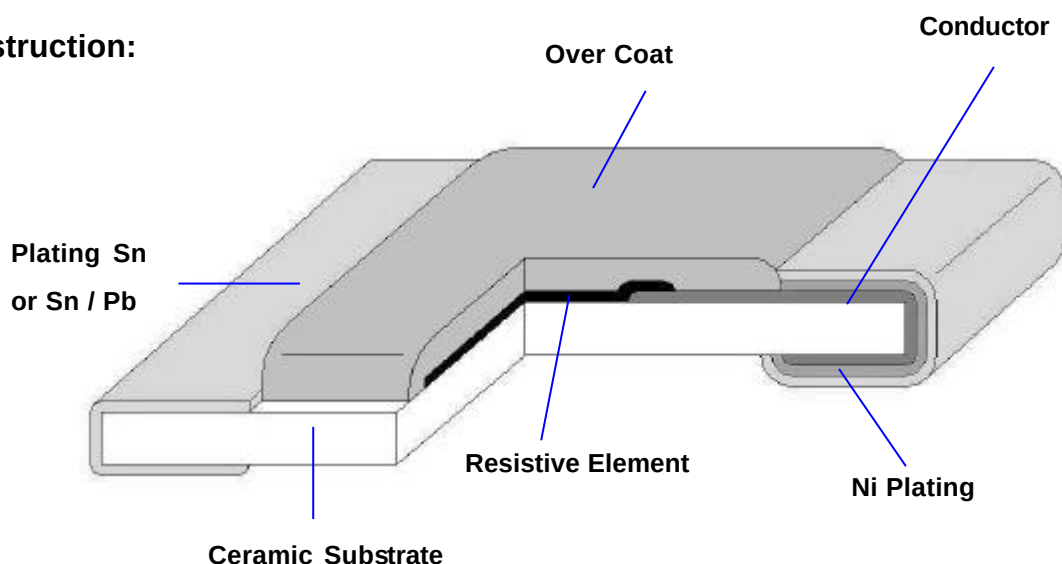

3.Type Designation:

DataSheet4U.com

DataShee

<u>RM</u>	<u>10</u>	<u>J</u>	<u>I</u>	<u>103</u>
<u>RM</u>	<u>10</u>	<u>J</u>	<u>TN</u>	<u>103</u>
Product Code	Size	Tolerance	Packaging	Nominal

RM : Chip Resistor Power Rating

Resistance

02-0201	1/20W
04-0402	1/16W
06-0603	1/10W
10-0805	1/8W
12-1206	1/4W
13-1210	1/3W
20-2010	1/2W
25-2512	1 W

J - $\pm 5\%$
G - $\pm 2\%$
F - $\pm 1\%$
D - $\pm 0.5\%$
B - $\pm 0.1\%$

T-Paper Tape
E-Embossed Tape
B-Bulk Cassette
+N: Lead-Free

Special
L : 06 – 2mm pitch
paper Tape

3 digits, e.g.,:
(E-24) $103=10^3\Omega=10k\Omega$
0=0 Ω
4 digits, e.g., :
(E-96) $1540=154\Omega$
43R2=43.2 Ω



Thick Film Chip Resistors (Standard)

Document No

TRM-XX0S001B

Issued date

2003/5/14

page


2 / 12

Note :

T : Normal products packaged by paper tape

TN : Lead-Free products packaged by paper tape

4. Dimensions:

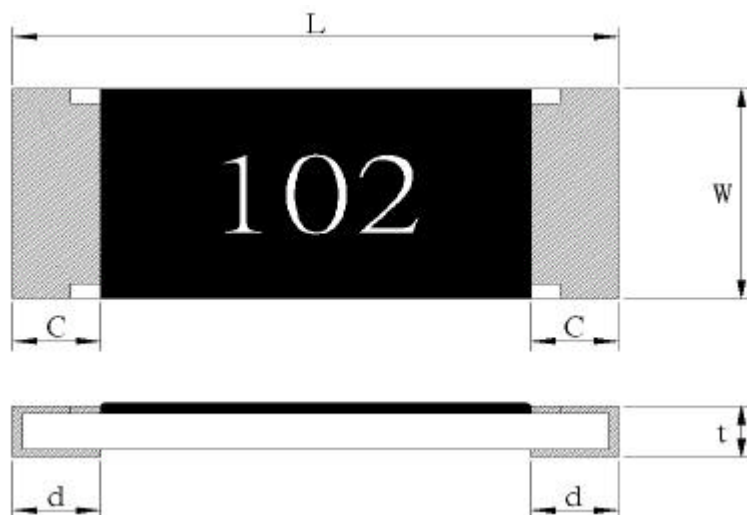

DataSheet4U.com

DataSheet4U.com

UNIT: mm

Style	L	W	C	d	t
RM02	0.6 ± 0.03	0.3 ± 0.03	0.1 ± 0.05	0.15 ± 0.05	0.25 ± 0.05
RM04	$1.0 \begin{smallmatrix} +0.1 \\ -0.05 \end{smallmatrix}$	0.5 ± 0.05	0.2 ± 0.1	0.25 ± 0.1	0.35 ± 0.05
RM06	1.6 ± 0.1	0.8 ± 0.1	0.3 ± 0.2	$0.3 \begin{smallmatrix} +0.2 \\ -0.1 \end{smallmatrix}$	0.45 ± 0.1
RM10	2.0 ± 0.1	1.25 ± 0.1	0.4 ± 0.2	0.4 ± 0.2	0.5 ± 0.1
RM12	3.1 ± 0.1	1.55 ± 0.1	0.5 ± 0.3	0.4 ± 0.2	0.6 ± 0.1
RM13	3.1 ± 0.1	2.55 ± 0.1	0.5 ± 0.3	0.4 ± 0.2	0.6 ± 0.1
RM20	5.0 ± 0.15	2.5 ± 0.15	0.6 ± 0.3	0.5 ± 0.25	0.6 ± 0.1
RM25	6.3 ± 0.2	3.2 ± 0.2	0.6 ± 0.3	0.5 ± 0.25	0.6 ± 0.1



Thick Film Chip Resistors (Standard)

Document No	TRM-XX0S001B
Issued date	2003/5/14
page	3 / 12

5.Ratings & Characteristics :

Style	Power Rating at 70°C	Max. Working Voltage	Max. Over-Load Voltage	T.C.R (PPM/°C)	Resistance Range(Ω)				
					B(±0.1%) E-96	D(±0.5%) E-96	F(±1%) E-96	G(±2%) E-24	J(±5%) E-24
RM02	1/20W	25V	50V	±200			10Ω-1MΩ	10Ω-1MΩ	10Ω-10MΩ
RM04	1/16W	50V	100V	±200			10Ω-1MΩ	10Ω-1MΩ	10Ω-10MΩ
				+500 -200			1Ω-9.1Ω	1Ω-9.1Ω	1-9.1Ω
RM06	1/10W	50V	100V	±100	56Ω-560kΩ	56Ω-560kΩ	10Ω-1MΩ		
				±200				10Ω-10MΩ	10Ω-10MΩ
				±400			1Ω-9.1Ω	1Ω-9.1Ω	1-9.1Ω
RM10	1/8W	150V	300V	±100	56Ω-560kΩ	56Ω-560kΩ	10Ω-1MΩ		
				±200				10Ω-10MΩ	10Ω-10MΩ
				±400			1Ω-9.1Ω	1Ω-9.1Ω	1-9.1Ω
RM12	1/4W	200V	400V	±100	56Ω-560kΩ	56Ω-560kΩ	10Ω-1MΩ		
				±200				10Ω-10MΩ	10Ω-10MΩ
				±400			1Ω-9.1Ω	1Ω-9.1Ω	1-9.1Ω
RM13	1/3W	200V	400V	±100	56Ω-560kΩ	56Ω-560kΩ	10Ω-1MΩ		
				±200				10Ω-10MΩ	10Ω-10MΩ
				±400			1Ω-9.1Ω	1Ω-9.1Ω	1-9.1Ω
RM20	1/2W	200V	400V	±100	56Ω-560kΩ	56Ω-560kΩ	10Ω-1MΩ		
				±200				10Ω-10MΩ	10Ω-10MΩ
				±400			1Ω-9.1Ω	1Ω-9.1Ω	1-9.1Ω
RM25	1W	200V	400V	±100	56Ω-560kΩ	56Ω-560kΩ	10Ω-1MΩ		
				±200				10Ω-10MΩ	10Ω-10MΩ
				±400			1Ω-9.1Ω	1Ω-9.1Ω	1-9.1Ω

0Ω THICK FILM CHIP RESISTORS

Style	Rated Current	Max Overload Current	Resistance Range
RM02	0.5A	1A	50mΩ MAX
RM04	1A	2.5A	50mΩ MAX
RM06	1A	2.5A	50mΩ MAX
RM10	2A	5A	50mΩ MAX
RM12	2A	5A	50mΩ MAX
RM13	2A	5A	50mΩ MAX
RM20	2A	5A	50mΩ MAX
RM25	2A	5A	50mΩ MAX

2. Operating Temp(°C): : -55°C ~ +125°C

Note : Except for the above standardized products, we also provide the customized products.



Thick Film Chip Resistors (Standard)

Document No

TRM-XX0S001B

Issued date

2003/5/14

page

4 / 12

5.1 Derating Curve :

For resistors operated at ambient temperature over 70°C , power rating shall be derated in accordance with figure 1.

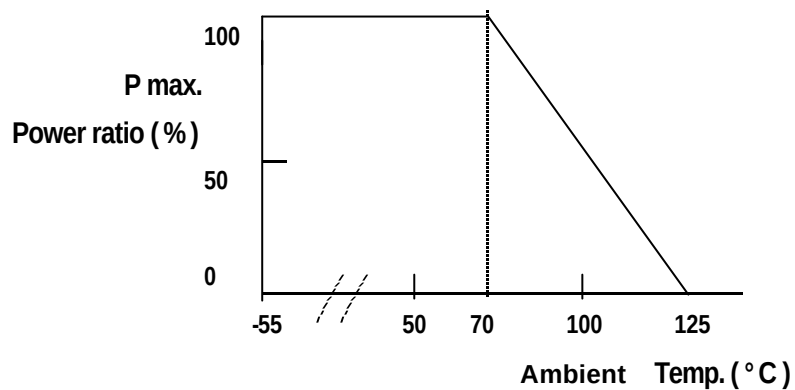


Figure 1

DataSheet4U.com

5.2 Rated Voltage:

The rated voltage is calculated by the following formula:

$$E = \sqrt{P * R}$$

E=Rated Voltage(V)

P=Rated Power(W)

R=Resistance Value(Ω)



Thick Film Chip Resistors (Standard)

Document No

TRM-XX0S001B

Issued date

2003/5/14

page

5 / 12

6. Reliability Tests: (As specified in JIS C 5202)

Test Items	Reference standard	Condition of Test	Test Limits
Temperature Coefficient of Resistance	JIS-C5202-5.2	+25 ~ +125 °C	Refer 5.0
Short Time Overload	JIS-C5202-5.5	2.5 X rated power for 5s	$\pm(1\% + 0.05\Omega)$ Remarks : 0201 : $\pm(3\% + 0.1\Omega)$ 0402 : $\pm(2\% + 0.1\Omega)$ 0 Ω : 50m Ω or less
Intermittent Overload Test	JIS-C5202-5.8	3.0 X rated power or Max Overloading Voltage , 1sec "ON" , 25sec "OFF" , 10000 cycles (Remarks : 0201 / 0402 2.5 X RCWV *)	$\pm(5.0\% + 0.1\Omega)$ 0 Ω : 50m Ω or less
Load Life	JIS-C5202-7.10	1000 hours at rated power , 70°C , 1.5hours "ON" , 0.5hour "OFF"	0.5%, 1%: $\pm(1.0\% + 0.05\Omega)$ 2%, 5%: $\pm(3.0\% + 0.1\Omega)$ Remarks : 0201 : $\pm(5.0\% + 0.1\Omega)$ 0402 : $\pm(3.0\% + 0.1\Omega)$ 0 Ω : 100m Ω or less
Load Life with Humidity	JIS-C5202-7.9	1000 hours at rated power , 40 $\pm$ 2°C, 90~95% RH 1.5hours "ON" , 0.5hour "OFF"	0.5%, 1%: $\pm(1.0\% + 0.05\Omega)$ 2%, 5%: $\pm(3.0\% + 0.1\Omega)$ Remarks : 0201: $\pm(5.0\% + 0.1\Omega)$ 0402: $\pm(3.0\% + 0.1\Omega)$ 0 Ω : 100m Ω or less Without mechanical damage
Rapid Change of Temperature	JIS-C5202-7.4	-55°C (30 min.) / +125 °C(30 min.) 5 cycles	0.5%, 1%: $\pm(0.5\% + 0.05\Omega)$ 2%, 5%: $\pm(1.0\% + 0.05\Omega)$ Remarks : 0201: $\pm(3.0\% + 0.1\Omega)$ 0 Ω : 50m Ω or less
Resistance to Soldering Heat	JIS-C5202-6.10	270 $\pm$ 5°C solder , 10 $\pm$ 1 sec dwell .	0.5%, 1%: $\pm(0.5\% + 0.05\Omega)$ 2%, 5%: $\pm(1.0\% + 0.05\Omega)$ Remarks : 0201 $\pm(3.0\% + 0.1\Omega)$ 0 Ω : 50m Ω or less
Solderability	JIS-C5202-6.11	235 $\pm$ 5°C solder, 2 $\pm$ 0.5 sec dwell.	At least 95% of surface area of electrode shall be covered with new solder.
Robustness of Termination (Bending Strength)	JIS-C5202-6.1	3mm deflection	0.5%, 1%: $\pm(0.5\% + 0.05\Omega)$ 2%, 5%: $\pm(1.0\% + 0.05\Omega)$ Remarks : 0201 $\pm(1.0\% + 0.1\Omega)$ 0 Ω : 50m Ω or less
Dielectric Withstanding Voltage(Voltage Proof)	JIS-C5202-5.7	Applying voltage : 0201 : 50V , 0402 & 0603 : 300V The other 500V for a minute .	No abnormalities such as flashover, burning dielectric breakdown shall appear.
Insulation Resistance	JIS-C5202-5.6	Applying voltage 100V for 1 minute. Remark : 0201 50V	$\geq 1G\Omega$
Resistance to Dry Heat	JIS-C5202-7.2	125 $\pm$ 5°C for 96 $\pm$ 4hrs	0.5%, 1%: $\pm(1.0\% + 0.05\Omega)$ 2%, 5%: $\pm(2.0\% + 0.1\Omega)$ Remark 0201 : $\pm(2.0\% + 0.1\Omega)$ 0 Ω : 50m Ω or less

Note* :RCWV : Rated continuous working voltage .



Thick Film Chip Resistors (Standard)

Document No

TRM-XX0S001B

Issued date

2003/5/14

page

6 / 12

7. Marking

7.1 $\pm 2\%$ & $\pm 5\%$ (E24)

Resistance value is expressed by 3 digits, the first two digits represent the significant figures of nominal resistance value in Ω , and the third digit represents exponent for base of 10.

$$\begin{aligned}\text{e.g., } 472 &= 47 \times 10^2 \\ &= 4700 \Omega \\ &= 4.7 \text{K} \Omega\end{aligned}$$

7.2 $\pm 1\%$ (E96)

Resistance value is expressed by 4 digits or 3 digits, the first three digits represent the significant figures of nominal resistance value in Ω , and the fourth digit represents exponent for base of 10.

$$\begin{aligned}\text{e.g., } 4701 &= 470 \times 10^1 \\ &= 4700 \Omega \\ &= 4.7 \text{K} \Omega\end{aligned}$$

7.3 $\pm 1\%$ (RM06/E96)

When the marking space is too small in such small-sized resistors as RM06, the marking can not be made by 4 digits and may be made by two digits combined with one English capital.

Symbol for E96 series nominal resistance value

Symbol	E96	Symbol	E96	Symbol	E96	Symbol	E96
01	100	25	178	49	316	73	562
02	102	26	182	50	324	74	576
03	105	27	187	51	332	75	590
04	107	28	191	52	340	76	604
05	110	29	196	53	348	77	619
06	113	30	200	54	357	78	634
07	115	31	205	55	365	79	649
08	118	32	210	56	374	80	665
09	121	33	215	57	383	81	681
10	124	34	221	58	392	82	698
11	127	35	226	59	402	83	715
12	130	36	232	60	412	84	732
13	133	37	237	61	422	85	750
14	137	38	243	62	432	86	768
15	140	39	249	63	442	87	787
16	143	40	255	64	453	88	806
17	147	41	261	65	464	89	825
18	150	42	267	66	475	90	845

TA-I TECHNOLOGY CO., LTD



Thick Film Chip Resistors (Standard)

Document No	TRM -XX0S001B
Issued date	2003/5/14
page	7 / 12

19	154	43	274	67	487	91	866
20	158	44	280	68	499	92	887
21	162	45	287	69	511	93	909
22	165	46	294	70	523	94	931
23	169	47	301	71	536	95	953
24	174	48	309	72	549	96	976

Symbol for multipliers

Symbol	A	B	C	D	E	F	G	H	X	Y	Z
multipliers	10^0	10^1	10^2	10^3	10^4	10^5	10^6	10^7	10^{-1}	10^{-2}	10^{-3}

Ex: 02c=102 $\times$ 10²=10.2k Ω

Notes :

When the resistance value is not in the list of E96 , 3 digitals with underline in E-24 series is used as mark .

e.g.,

0603 , 120 Ω , 1% Marking is 121

7.4 $\pm 1\%$ (E96/3digitals)


The resistance value by 3 digits is requirement for customer.

7.5 No Marking for RM04

8. Taping & Reel

8.1 Taping Dimensions

8.1.1 4 mm pitch paper

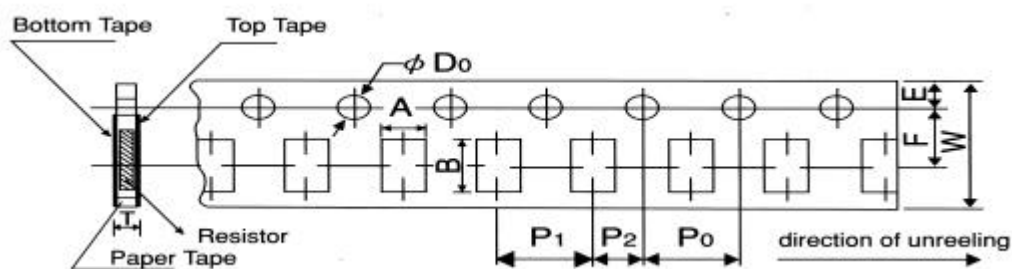

Packing	Style	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀	T
Paper	RM06	1.1 $\pm$ 0.1	1.9 $\pm$ 0.1	8.0 $\pm$ 0.2	3.5 $\pm$ 0.05	1.75 $\pm$ 0.1	4.0 $\pm$ 0.1	2.0 $\pm$ 0.05	4.0 $\pm$ 0.1	ψ 1.5 +0.1 -0	0.64 $\pm$ 0.1
	RM10	1.6 $\pm$ 0.15	2.4 $\pm$ 0.2								0.84 $\pm$ 0.1
	RM12	2.0 $\pm$ 0.15	3.6 $\pm$ 0.2								
	RM13	2.8 $\pm$ 0.2	3.6 $\pm$ 0.2								

UNIT: mm



Thick Film Chip Resistors (Standard)

Document No

TRM -XX0S001B


Issued date

2003/5/14

page


8 / 12

8.1.2 2mm pitch paper

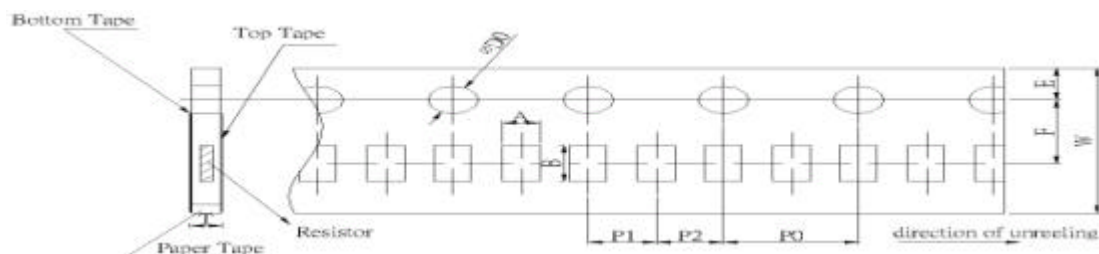

Packing	Style	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀	T
Paper	RM02	0.37±0.05	0.67±0.1	8.0±0.2	3.5±0.05	1.75±0.1	2.0±0.1	2.0±0.05	4.0±0.1	ψ1.5 ^{+0.1} ₋₀	0.37±0.1
	RM04	0.7±0.05	1.2±0.05				2.0±0.1	2.0±0.1			0.45±0.1
	RM06	1.1±0.1	1.9±0.1				2.0±0.1	2.0±0.1			0.64±0.1

8.1.3 4mm pitch Emboss

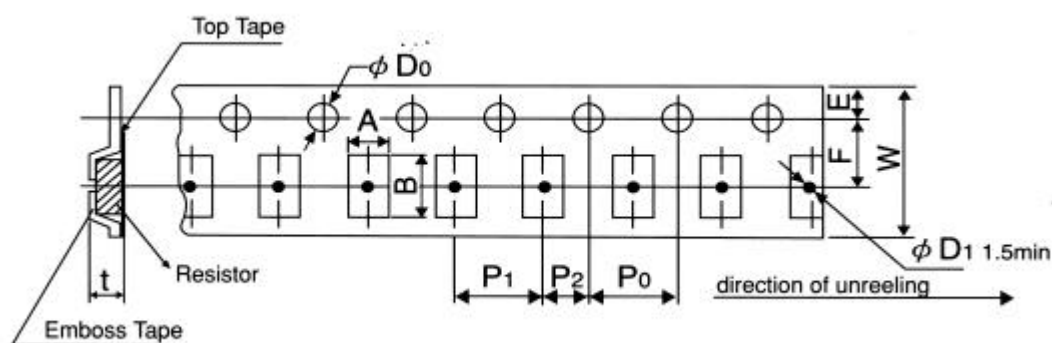

Packing	Type	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀	T
Emboss	RM20	2.8±0.2	5.3±0.2	12.0±0.2	5.5±0.05	1.75±0.1	4.0±0.1	2.0±0.05	4.0±0.05	ψ1.5 ^{+0.1} ₋₀	0.85±0.15
	RM25	3.6±0.2	6.9±0.2								

Package Style Size		Paper Tape				Emboss Plastic Tape 4 mm pitch	Bulk
		4 mm pitch		2 mm pitch			
		180mm/R	250mm/R	180mm/R	250mm/R		
RM	02			10000			
RM	04			10000	20000		50000
RM	06	5000	10000	10000	20000		20000
RM	10	5000	10000				10000
RM	12	5000	10000				5000
RM	13	5000					
RM	20					4000	
RM	25					4000	



Thick Film Chip Resistors (Standard)

Document No

TRM-XX0S001B


Issued date

2003/5/14

page

9 / 12

8.2 Reel Specifications

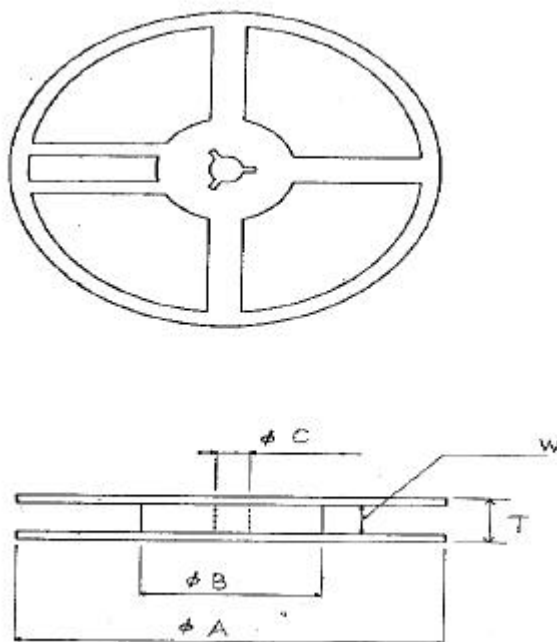

DataSheet4U.com

UNIT: mm

Style	ψA	ψB	ψC	W	T
RM02 / 04 / 06 RM10 / 12 / 13	180 ⁺⁰ ₋₃	60 min	13.0 ± 1.0	9.0 ± 1.0	11.4 ± 2.0
RM20 / 25				13.0 ± 1.0	15.4 ± 2.0

8.3 Storage Conditions:

The resistors with appropriate package would have a preservative duration of 1 year.

Temperature: 5°C~35°C, Humidity: 40%~75%



Thick Film Chip Resistors (Standard)

Document No

TRM-XX0S001B

Issued date

2003/5/14


page

10 / 12


8.4 Peel –off force :

Peel –off force of paper and blister tape is in accordance with “JIS-C5202 ”

that is , 0.1 to 0.7 N at a peel-off speed of 300 mm / minute.

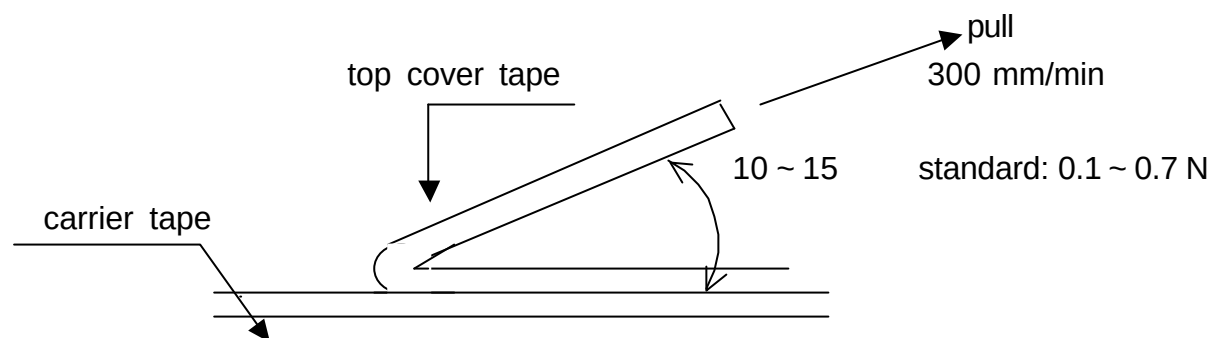


9. Bulk Case Specifications:

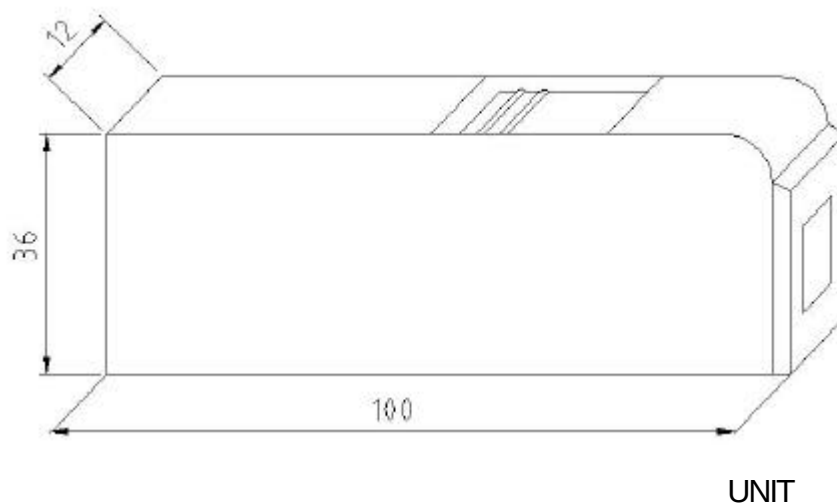

	Thick Film Chip Resistors (Standard)	Document No	TRM -XX0S001B
		Issued date	2003/5/14
		page	11 / 12


10. Label

10.1 Normal Products :

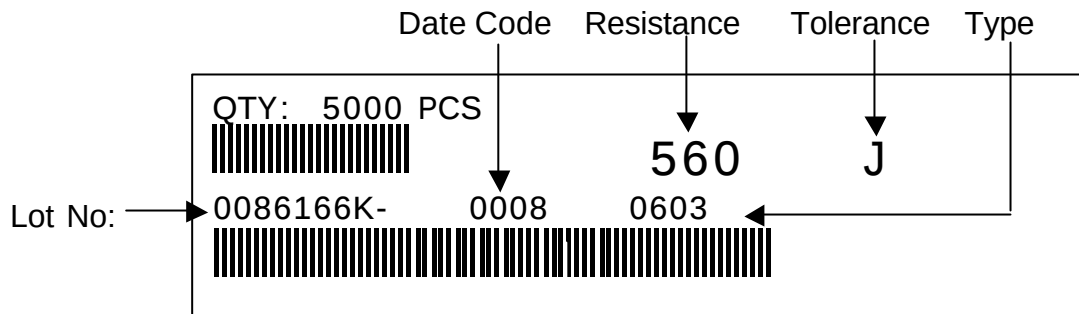

Manufacture Label

10.2 Lead-Free Products :

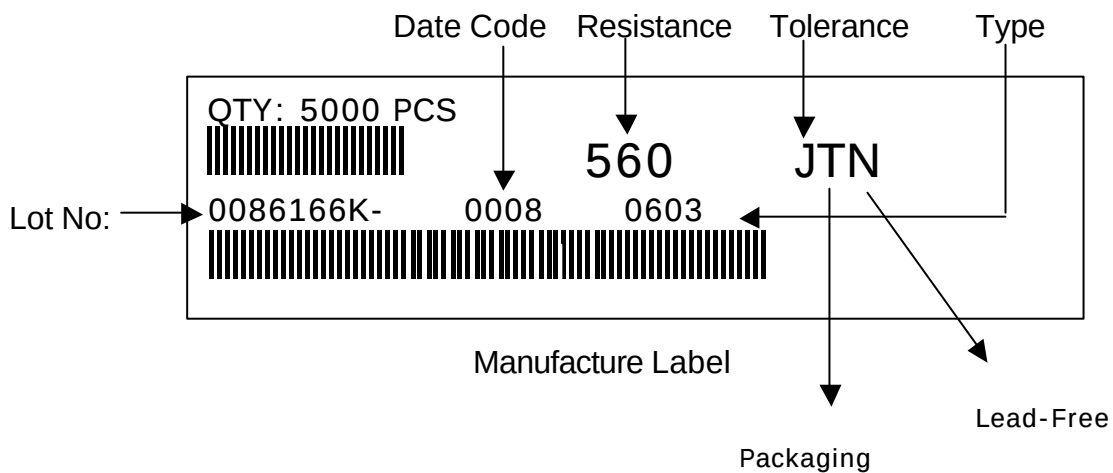

Manufacture Label



Thick Film Chip Resistors (Standard)

Document No

TRM-XX0S001B


Issued date

2003/5/14

page

12 / 12

11. Recommended land patterns

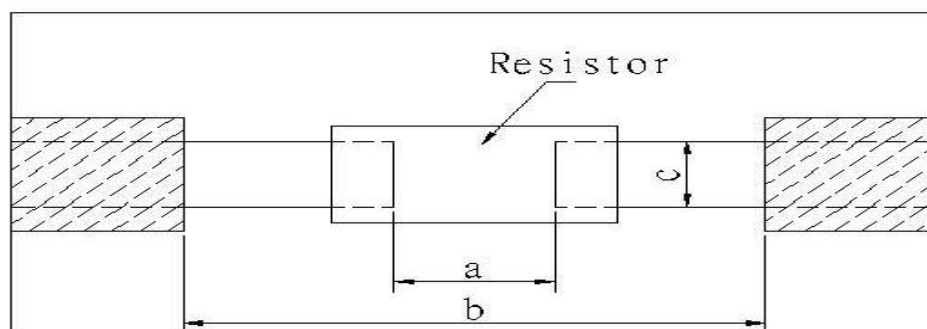

Type	Size	Land pattern Dimension (mm)		
		a	b	c
RM	02 (0201)	0.25~0.3	0.7~0.9	0.3~0.4
RM	04 (0402)	0.50~0.6	1.4~1.6	0.4~0.6
RM	06 (0603)	0.7~0.9	2.0~2.2	0.8~1.0
RM	10 (0805)	1.0~1.4	3.2~3.8	0.9~1.4
RM	12 (1206)	2.0~2.4	4.4~5.0	1.2~1.8
RM	13 (1210)	2.0~2.4	4.4~5.0	2.3~3.5
RM	20 (2010)	3.3~3.7	5.7~6.5	2.3~3.5
RM	25 (2512)	3.6~4.0	7.6~8.6	2.3~3.5

12.ECN

Engineering Change Notice: The customer will be informed with ECN if there is significant modification on the characteristics and materials described in Approval Sheet.

13. Manufacturing Country & City:

TAI TECHNOLOGY CO., LTD. (Taiwan- Taoyuan)

Tel: 886-3-3246169 Fax : 886-3-3246167

Associated companies :

(1) FORTUNE TASK RESISTOR FACTORY (China - Kwangtung)

Tel : 86-769-3394790 Fax : 86-769-3394794

(2) TAI TECHNOLOGY (SU ZHOU) CO., LTD. (China - Jiang-Su)

Tel : 86-512-3457879 Fax : 86-512-3457869

(3) TAI OHM ELECTRONICS (M) SDN. BHD. (Malaysia - Pulaupinang)

Tel : 604-3900480 Fax : 604-3901481

(4) P.T.TAI ELECTRONICS Indonesia (Indonesia - Jakarta)

Tel : 002-62-21-44820254 Fax : 002-62-21-44820256

TAI TECHNOLOGY CO., LTD