

RM2 - RM2Z

PRV : 200 - 1000 Volts
Io : 1.2 Amperes


FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop

MECHANICAL DATA :

- * Case : D2A Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.645 gram

SILICON RECTIFIER DIODES

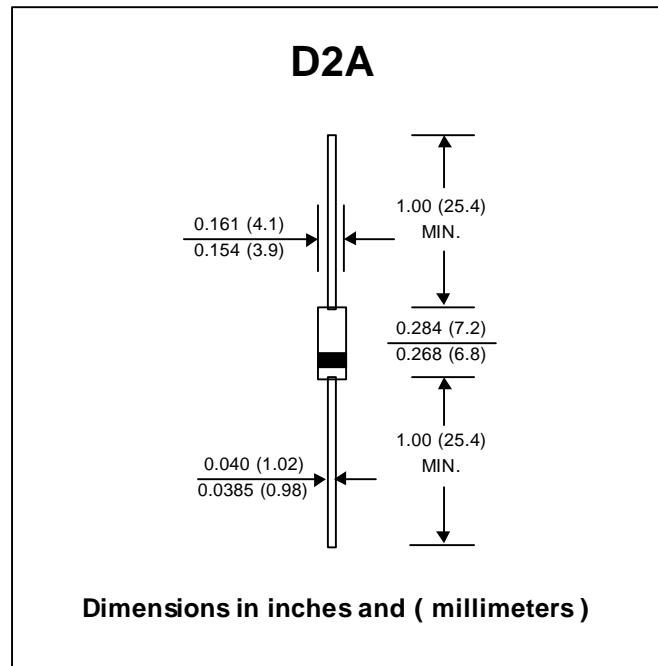

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

RATING	SYMBOL	RM2Z	RM2	RM2A	RM2B	RM2C	UNIT	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	200	400	600	800	1000	Volts	
Maximum RMS Voltage	V_{RMS}	140	280	420	560	700	Volts	
Maximum DC Blocking Voltage	V_{DC}	200	400	600	800	1000	Volts	
Maximum Average Forward Current 0.375"(9.5mm) Lead Length $T_a = 70\text{ }^\circ\text{C}$	I_F	1.2						Amps.
Peak Forward Surge Current 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method)	I_{FSM}	100						Amps.
Maximum Forward Voltage at $I_F = 1.5\text{ Amps.}$	V_F	0.91						Volts
Maximum DC Reverse Current $T_a = 25\text{ }^\circ\text{C}$ at rated DC Blocking Voltage $T_a = 100\text{ }^\circ\text{C}$	I_R	10						μA
	$I_{R(H)}$	50						μA
Typical Junction Capacitance (Note1)	C_J	30						pF
Typical Thermal Resistance (Note2)	$R_{\theta JA}$	50						$^\circ\text{C/W}$
Junction Temperature Range	T_J	- 65 to + 175						$^\circ\text{C}$
Storage Temperature Range	T_{STG}	- 65 to + 175						$^\circ\text{C}$

Notes :

- (1) Measured at 1.0 MHz and applied reverse voltage of 4.0V_{DC}
- (2) Thermal resistance from Junction to Ambient at 0.375" (9.5mm) Lead Lengths, P.C. Board Mounted.

RATING AND CHARACTERISTIC CURVES (RM2 - RM2Z)

FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

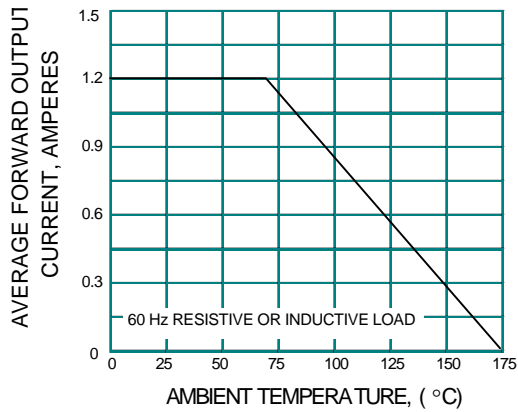


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

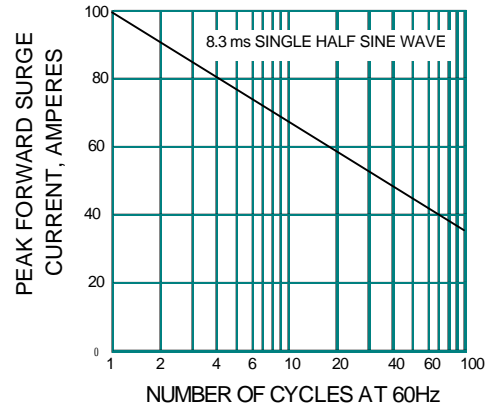


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

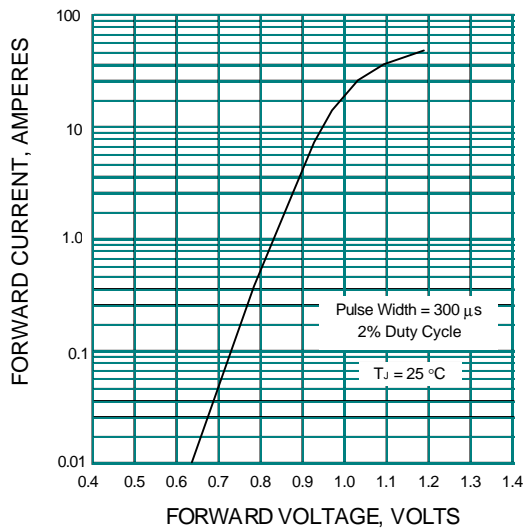


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

