


P-Channel Enhancement Mosfet

Feature

- -40V,5A
 $R_{DS(on)} < 85m\Omega @ V_{GS} = -10V$ TYP: 65 m Ω
 $R_{DS(on)} < 120m\Omega @ V_{GS} = -4.5V$ TYP: 90 m Ω
- Advanced Trench Technology
- Lead free product is acquired



Schematic diagram

Application

- Interfacing Switching
- Load Switching
- Power management
- Halogen-free



SOT-23 top view

Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity (PCS)
40P05	RM5P40S2	SOT23	7inch	-	3000

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-40	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ($T_a = 25^\circ\text{C}$)	I_D	-5	A
Continuous Drain Current ($T_a = 70^\circ\text{C}$)	I_D	-3.5	A
Pulsed Drain Current	I_{DM}	-20	A
Power Dissipation	P_D	2	W
Thermal Resistance from Junction to Ambient ⁽⁴⁾	$R_{\theta JA}$	62.5	$^\circ\text{C}/\text{W}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55~ +150	$^\circ\text{C}$

MOSFET ELECTRICAL CHARACTERISTICS($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D =-250μA	-40	-	-	V
Zero gate voltage drain current	I _{DSS}	V _{DS} =-40V, V _{GS} = 0V	-	-	1	μA
Gate-body leakage current	I _{GSS}	V _{GS} =±20V,V _{DS} = 0V	-	-	±100	nA
Gate threshold voltage ⁽³⁾	V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	-1	-1.6	-2.5	V
Drain-source on-resistance ⁽³⁾	R _{DS(on)}	V _{GS} =-10V, I _D =-3A	-	65	85	mΩ
		V _{GS} =-4.5V, I _D =-2A	-	90	120	
Dynamic characteristics						
Input Capacitance	C _{iss}	V _{DS} =-20V, V _{GS} =0V, f =1MHz	-	596	-	pF
Output Capacitance	C _{oss}		-	90	-	
Reverse Transfer Capacitance	C _{rss}		-	70	-	
Switching characteristics						
Turn-on delay time	t _{d(on)}	V _{DD} =-20V, I _D =-3A, V _{GS} =-10V, R _G =3Ω	-	9	-	ns
Turn-on rise time	t _r		-	8	-	
Turn-off delay time	t _{d(off)}		-	28	-	
Turn-off fall time	t _f		-	10	-	
Total Gate Charge	Q _g	V _{DS} =-20V, I _D =-3A, V _{GS} =-10V	-	14	-	nC
Gate-Source Charge	Q _{gs}		-	2.9	-	
Gate-Drain Charge	Q _{gd}		-	3.8	-	
Source-Drain Diode characteristics						
Diode Forward voltage ⁽³⁾	V _{DS}	V _{GS} =0V, I _S =-3A	-	-	1.2	V
Diode Forward current ⁽⁴⁾	I _S		-	-	-4.0	A

Notes:

1. Repetitive Rating: pulse width limited by maximum junction temperature
2. Pulse Test: pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$
3. Surface Mounted on FR4 Board, $t \leq 10$ sec

Test Circuit

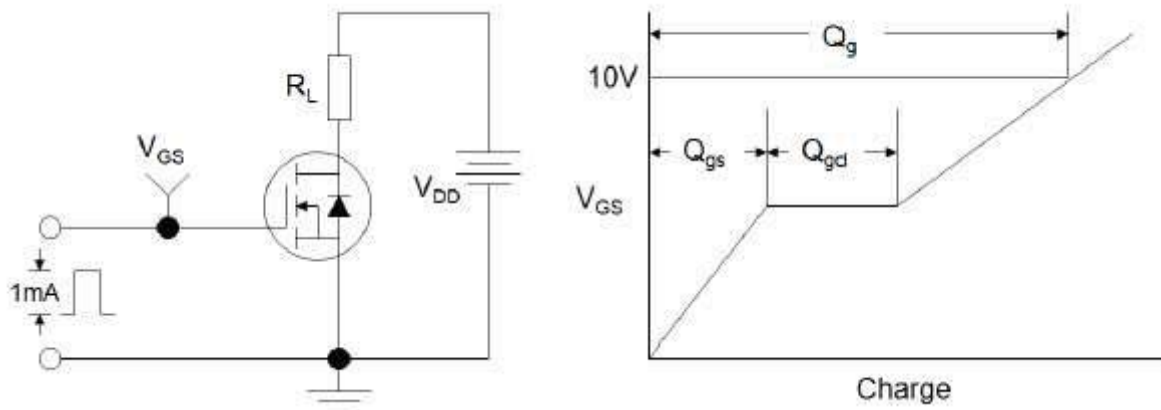


Figure1:Gate Charge Test Circuit & Waveform

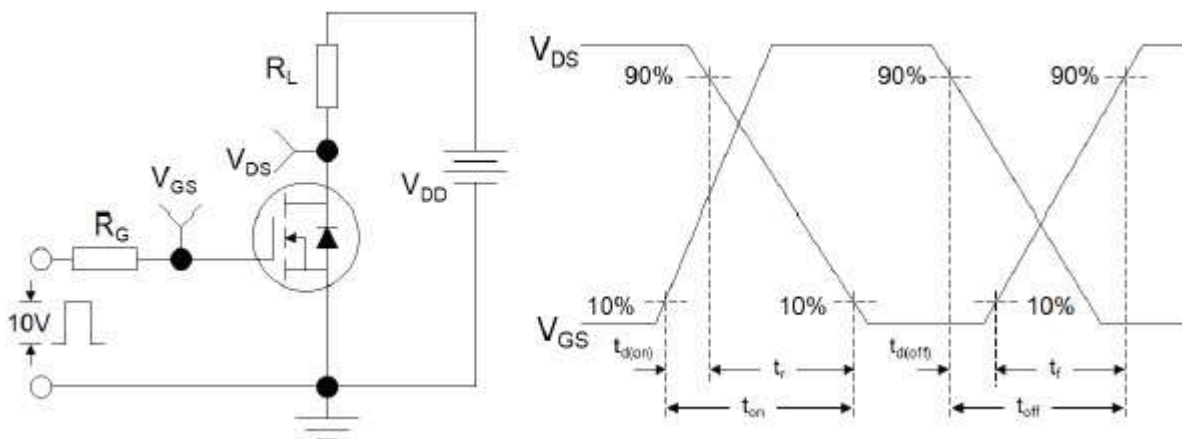


Figure 2: Resistive Switching Test Circuit & Waveforms

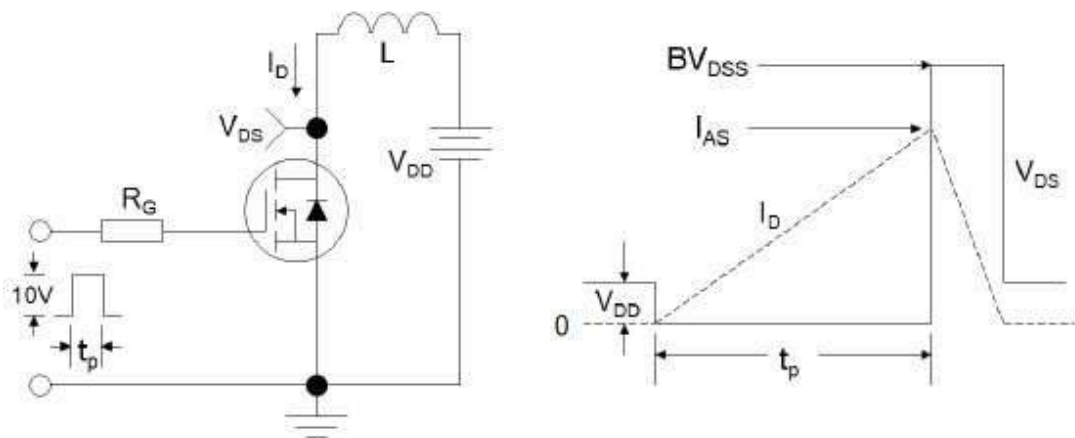


Figure 3:Unclamped Inductive Switching Test Circuit & Waveforms

RATING AND CHARACTERISTICS CURVES (RM5P40S2)

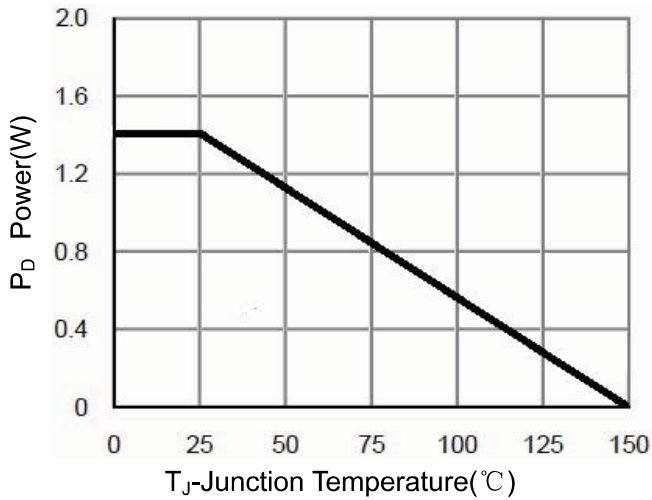


Figure 1 Power Dissipation

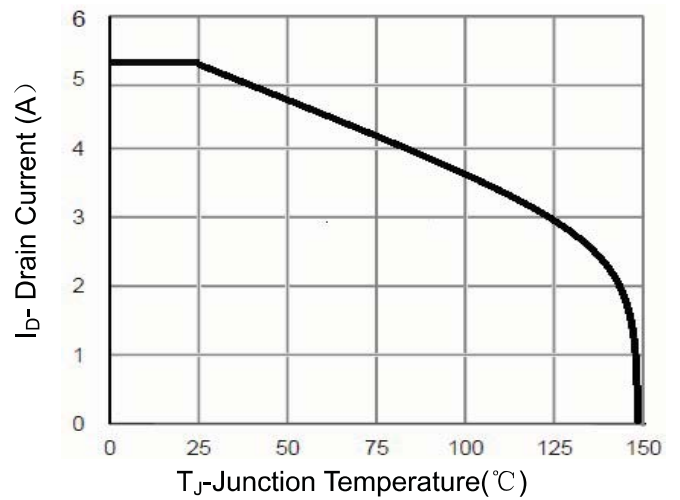


Figure 2 Drain Current

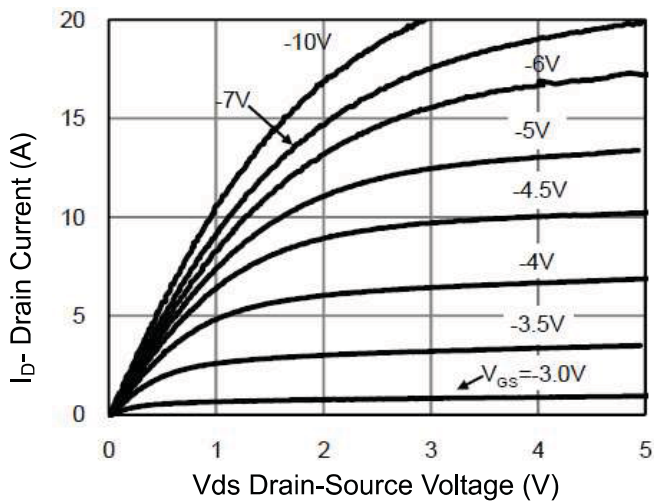


Figure 3 Output Characteristics

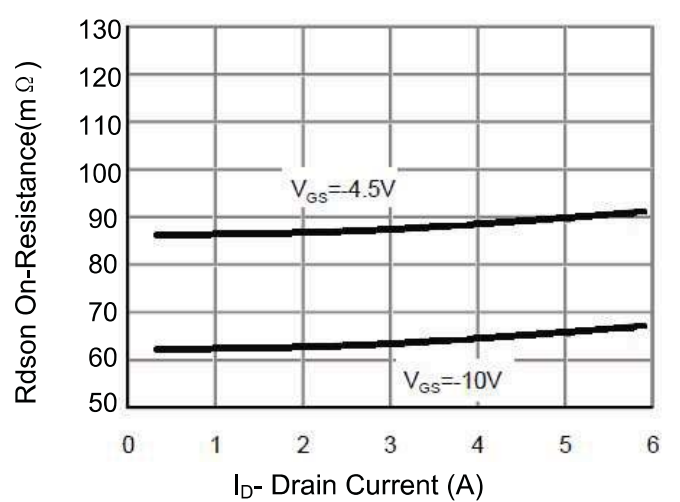


Figure 4 Drain-Source On-Resistance

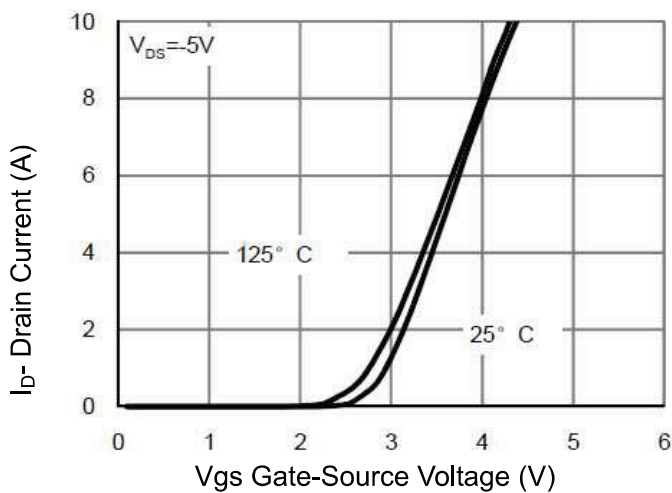


Figure 5 Transfer Characteristics

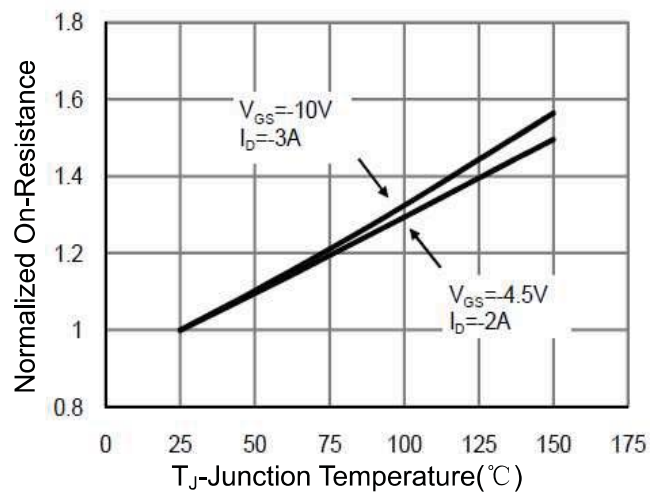


Figure 6 Drain-Source On-Resistance

RATING AND CHARACTERISTICS CURVES (RM5P40S2)

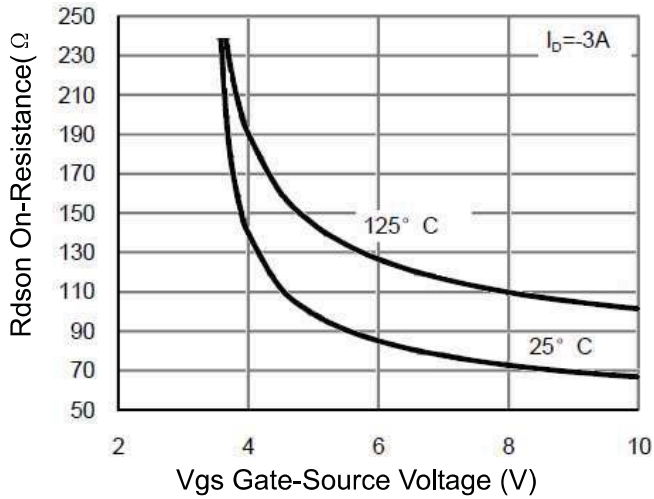


Figure 7 Rdson vs Vgs

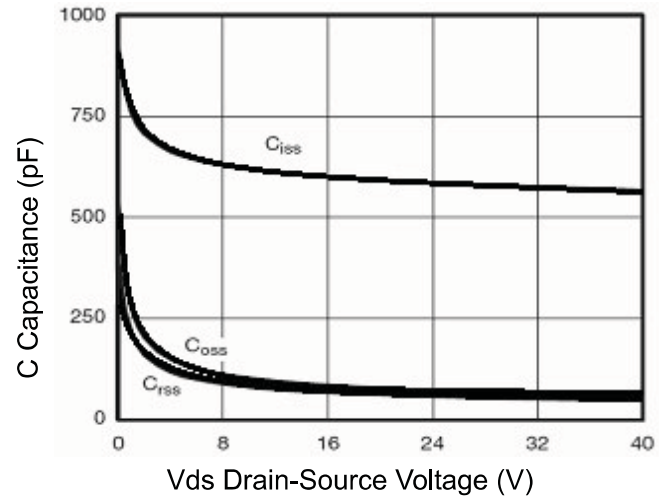


Figure 8 Capacitance vs Vds

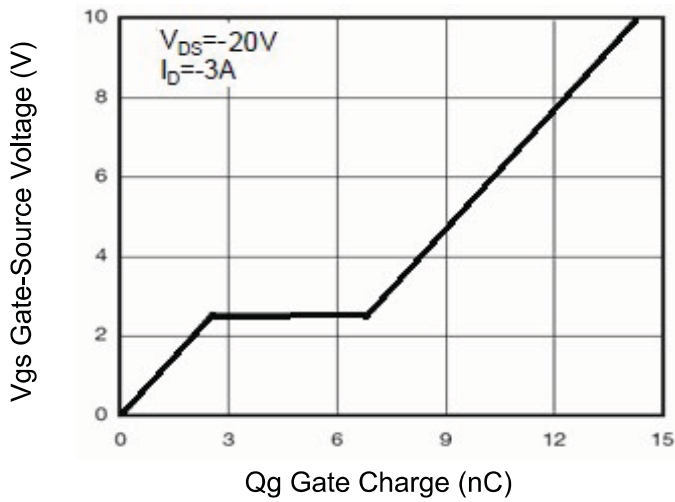


Figure 9 Gate Charge

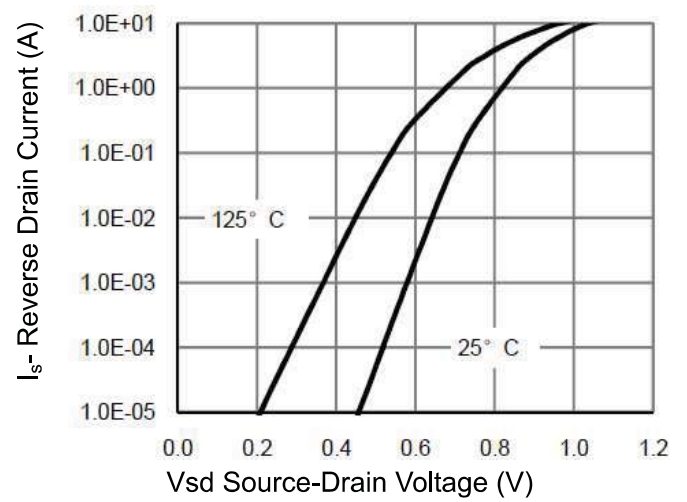


Figure 10 Source- Drain Diode Forward


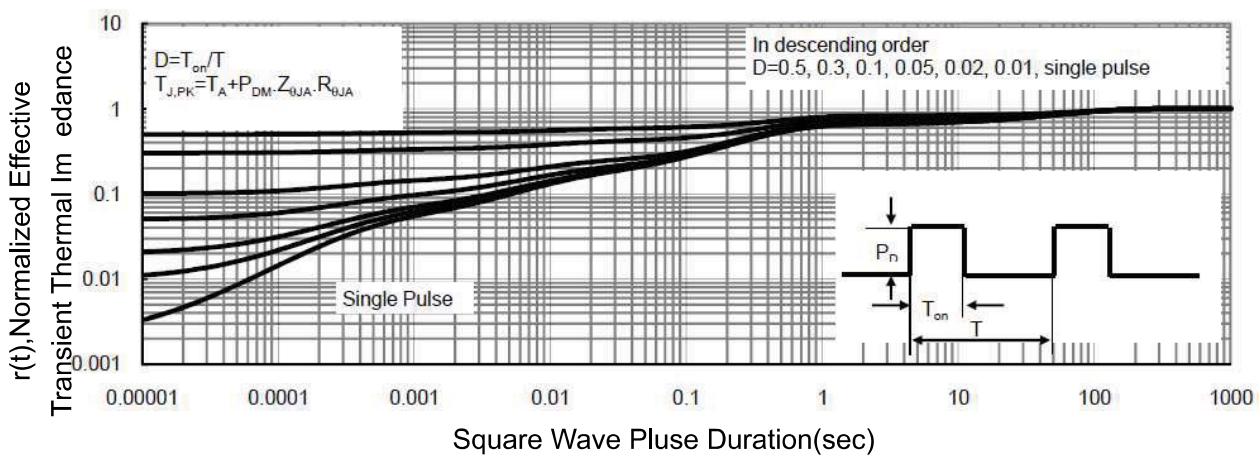


Figure 11 Normalized Maximum Transient Thermal Impedance


SOT-23 Package Information

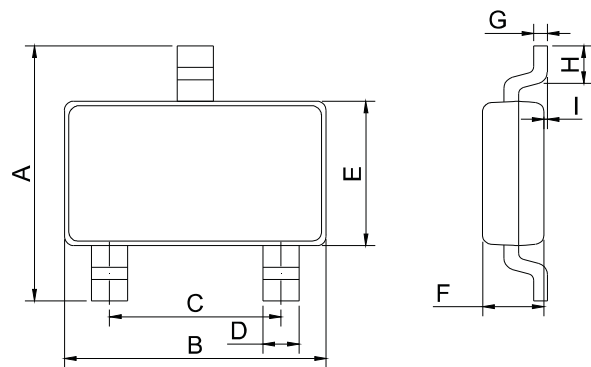

SOT-23

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.30	2.40	2.50	0.091	0.095	0.098
B	2.80	2.90	3.00	0.110	0.114	0.118
C	1.90 REF			0.075 REF		
D	0.35	0.40	0.45	0.014	0.016	0.018
E	1.20	1.30	1.40	0.047	0.051	0.055
F	0.90	1.00	1.10	0.035	0.039	0.043
G		0.10	0.15		0.004	0.006
H	0.20			0.008		
I	0		0.10	0		0.004

Package Information-SOT-23

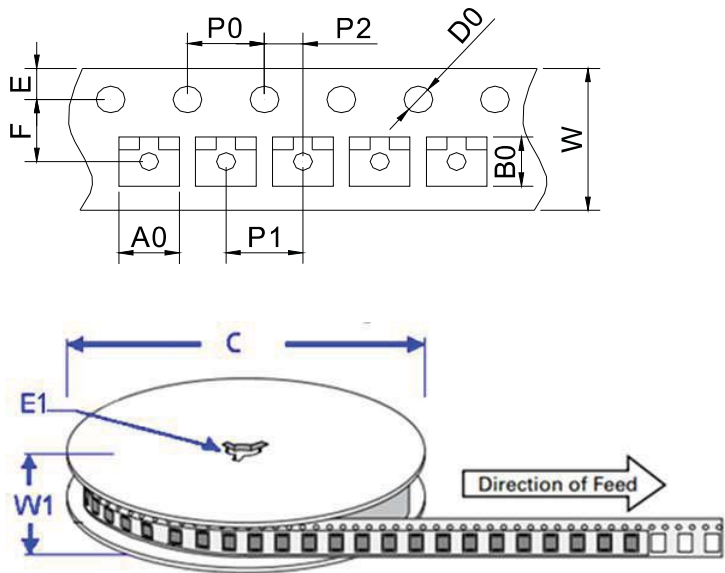

Ref.	Dimensions	
	Millimeters	Inches
A0	3.15 ± 0.3	0.124 ± 0.012
B0	2.77 ± 0.3	0.109 ± 0.012
C	178	7.0
D0	1.50±0.1	0.059 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3±0.3	0.524± 0.012
F	3.5 ± 0.2	0.138 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	4.00 ± 0.2	0.157 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	8.00 ± 0.2	0.315 ± 0.008
W1	11.5±1.0	0.453 ± 0.039

DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.