



- Miniature dimensions
- General purpose relays
- Protection category IP 40 or IP 67
- For PCB and plug-in sockets
- DC coils - standard and sensitive
- Recognitions, certifications, directives: RoHS,    

Contact data

Number and type of contacts		2 C/O, 2 NO, 2 NC
Contact material		AgCu/Au 0,2 µm , AgCdO, AgCdO/Au 3 µm
Rated / max. switching voltage	AC	250 V / 440 V
Min. switching voltage		10 V AgCu/Au 0,2 µm, 10 V AgCdO, 5 V AgCdO/Au 3 µm
Rated load	AC1	8 A / 250 V AC
	DC1	8 A / 24 V DC
Min. switching current		5 mA AgCu/Au 0,2 µm, 5 mA AgCdO, 2 mA AgCdO/Au 3 µm
Rated current		8 A
Max. breaking capacity	AC1	2 000 VA
Min. breaking capacity		0,5 W AgCu/Au 0,2 µm, 0,5 W AgCdO, 0,05 W AgCdO/Au 3 µm
Contact resistance		≤ 100 mΩ
Max. operating frequency		
• at rated load	AC1	600 cycles/hour
• no load		72 000 cycles/hour

Coil data

Rated voltage	DC	6 ... 110 V standard version 5 ... 110 V sensitive version
Must release voltage		DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2
Rated power consumption	DC	0,8 W standard version 0,5 W sensitive version

Insulation according to PN-EN 60664-1

Insulation rated voltage		400 V AC
Dielectric strength		
• between coil and contacts	4 000 V AC	type of insulation: reinforced
• contact clearance	1 000 V AC	type of clearance: micro-disconnection
• pole - pole	2 500 V AC	type of insulation: basic
Contact - coil distance		
• clearance	≥ 8 mm	
• creepage	≥ 8 mm	

General data

Operating / release time (typical values)		7 ms / 2 ms
Electrical life		
• resistive AC1		> 2 x 10 ⁵ 8 A, 250 V AC
• cos φ		see Fig. 2
Mechanical life (cycles)		> 3 x 10 ⁷
Motor load according to UL 508		1/8 HP 120 V AC, single-phase motor
Dimensions (L x W x H)		IP 40: 28 x 12,5 x 26 mm IP 67: 28 x 12,5 x 26,5 mm
Weight		20 g
Ambient temperature	• storage • operating	-40...+85 °C -40...+70 °C
Cover protection category		IP 40 or IP 67 PN-EN 60529
Shock resistance		20 g
Vibration resistance	(2 NO/2 NC)	10 g / 5 g 10...150 Hz
Solder bath temperature		max. 270 °C
Soldering time		max. 5 s

The data in bold type pertain to the standard versions of the relays.

❶ Special version available: relays in transparent cover - see "Ordering codes".

Coil data - standard DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance $\pm 10\%$ at 20 °C Ω	Coil operating range at 20 °C V DC	
			min.	max.
1006	6	47	3,9	8,5
1012	12	170	7,9	16,2
1024	24	740	16,8	33,6
1036	36	1 350	22,0	45,5
1048	48	3 200	34,0	70,0
1060	60	5 000	42,0	87,0
1096	96	10 000	61,0	125,0
1110	110	13 000	77,0	140,0

The data in bold type pertain to the standard versions of the relays.


Coil data - sensitive DC voltage version

Table 2


Coil code	Rated voltage V DC	Coil resistance $\pm 10\%$ at 20 °C Ω	Coil operating range at 20 °C V DC	
			min.	max.
S005	5	47	3,5	8,5
S006	6	70	4,4	10,3
S012	12	270	8,8	20,3
S024	24	1 100	17,5	41,0
S036	36	2 000	24,0	55,0
S048	48	4 400	35,0	82,0
S060	60	6 500	44,0	100,0
S110	110	20 000	88,0	188,0

The data in bold type pertain to the standard versions of the relays.

Dimensions

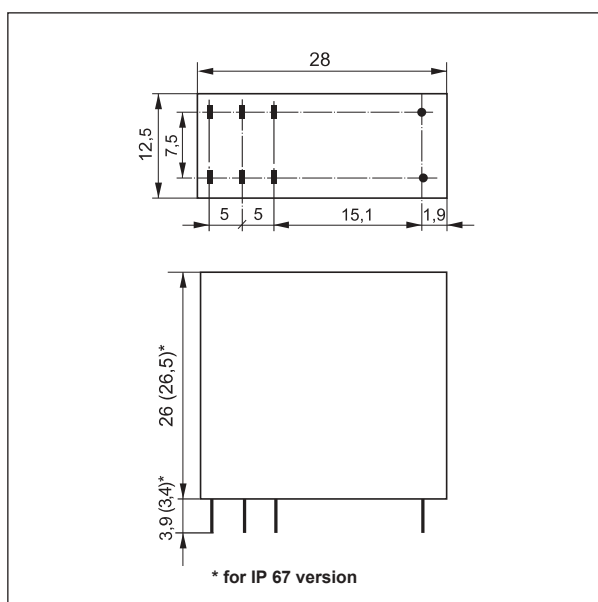

Connection diagrams (pin side view)

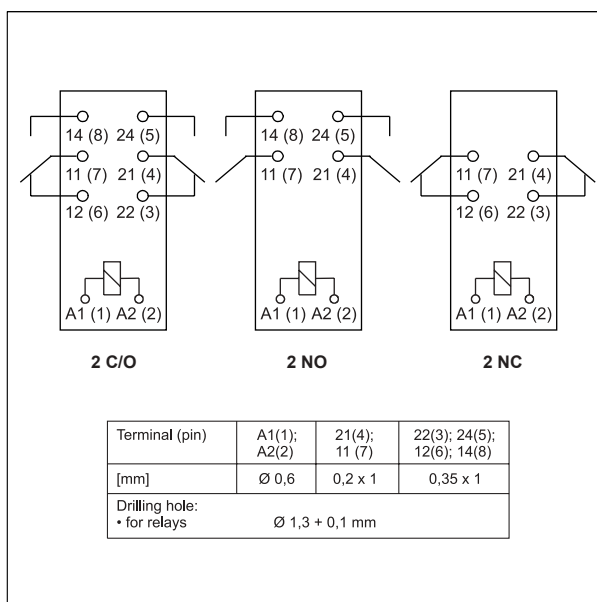


Mounting

Relays **RM94** are designed for: • direct PCB mounting • plug-in sockets for PCB mounting **EC50** with clip **MP25-2**, MH25-2, GD-0025, RM81-0001; plug-in sockets **PW80** with clip **MH25-2**, GD-0025, RM81-0001; plug-in sockets **GD50** with clip **MP25-2**, GD-0025, MH25-2, RM81-0001.


Max. breaking capacity
A - resistive load DC1
B - resistive load AC1

Fig. 1

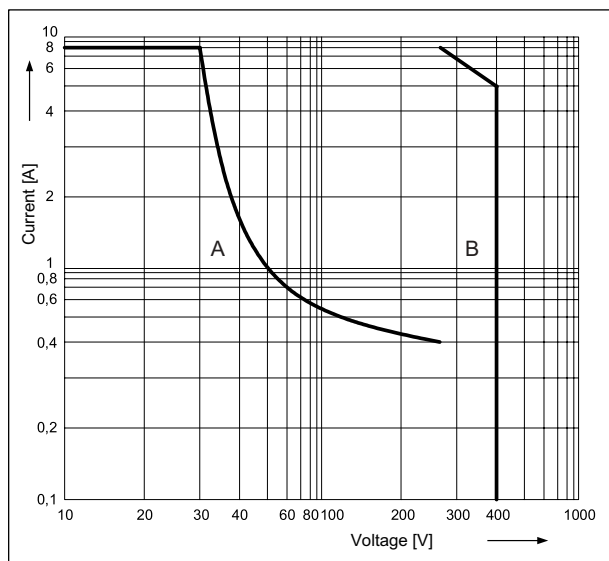


Electrical life reduction factor at AC inductive load

Fig. 2

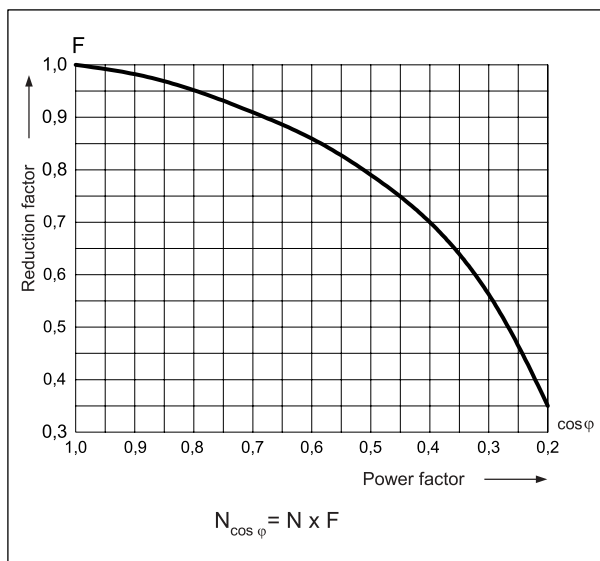


Coil temperature rise - standard version

Fig. 3

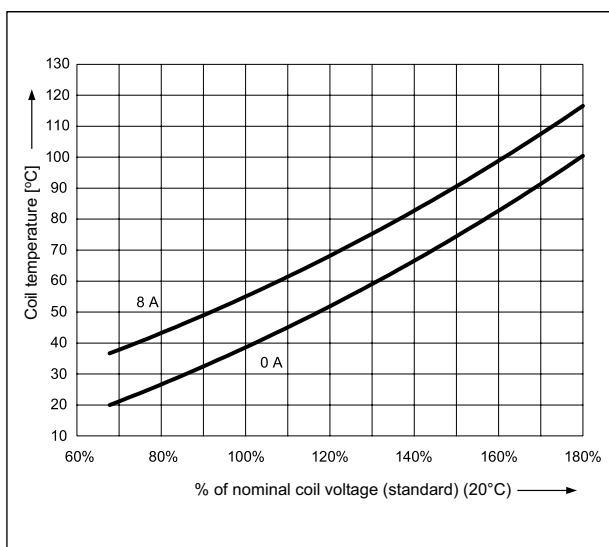

Coil temperature rise - sensitive version

Fig. 4

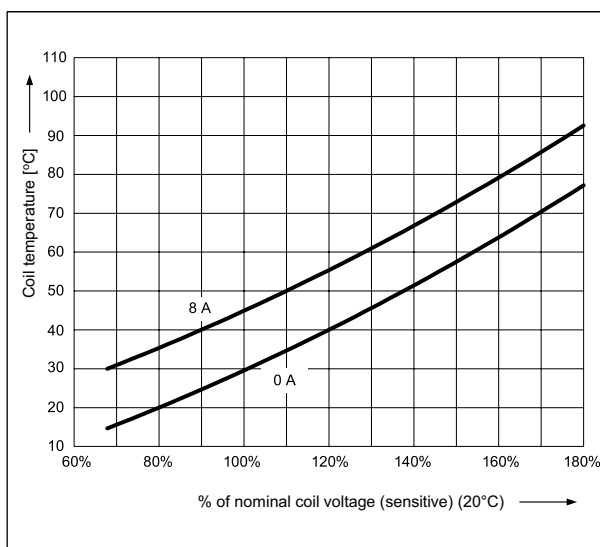

Pinout (solder side view)

