

Features

Regulated Converter

- 10:1 ultra wide input voltage range
- 4.242kVAC/1 minute reinforced insulation
- UL/IEC/EN60950-1 certified
- CE marked, CB report
- Efficiency up to 93%
- -40°C to +93.5°C baseplate temperature range

RECOM
DC/DC Converter

RPA200H-RUW

**200 Watt
Half Brick
Single Output**



UL
E224736

EAC

UL60950-1 certified
CAN/CSA No. 60950-1-07
IEC/EN60950-1 certified
EN50155 compliant
CB report

Description

The half-brick RPA200H series DC/DC converter is designed for railway rolling stock and high voltage battery applications. It has a 10:1 input voltage range to cover all input voltages from nominal 24VDC up to 110VDC in a single product (including EN50155 transients) and offers isolated and regulated 12V, 15V, 24V or 48VDC outputs. The converter has a consistently high efficiency over the entire input voltage range and comes with a metal baseplate to permit a wide operating temperature range from -40°C to +93.5°C (when baseplate cooled). The case is fitted with threaded inserts to allow secure mounting to the PCB or bulkhead for use in high shock and vibration environments. The converter is certified to UL/IEC/EN60950 and comes with a three year warranty.

Selection Guide

Part Number	Input Voltage Range ⁽¹⁾ [VDC]	Output Voltage [VDC]	Output Current [A]	Efficiency typ. ⁽²⁾ [%]	Max. Capacitive Load ⁽³⁾ [μF]
RPA200H-11012SRUW ⁽⁴⁾	16.5-140	12	16.7	90	2200
RPA200H-11015SRUW ⁽⁴⁾	16.5-140	15	13.5	93	2200
RPA200H-11024SRUW ⁽⁴⁾	16.5-140	24	8.5	88	1000
RPA200H-11048SRUW ⁽⁴⁾	16.5-140	48	4.2	90	100


Notes:

Note1: Refer to input voltage graph on page PB-3

Note2: Efficiency is tested at nominal input (110V) and full load at +25°C ambient

Note3: Max. Cap Load is tested at nominal input and full resistive load

Model Numbering

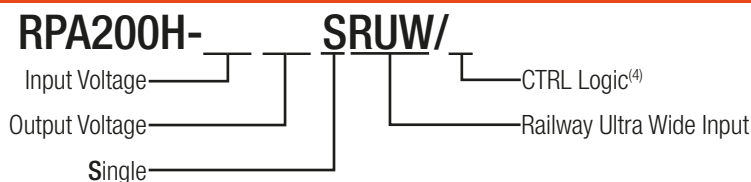

Ordering Examples

RPA200H-11012SRUW/P = 110V Input, 12V Output, Single, Pos. CTRL function

RPA200H-11012SRUW/N = 110V Input, 12V Output, Single, Neg. CTRL function

Notes:

Note4: add suffix "P" for positive logic (1=ON, 0=OFF) or add suffix "N" instead for negative logic (0=ON, 1=OFF)

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)

BASIC CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.
Internal Input Filter				Pi-Type
Input Voltage Range		16.5VDC	110VDC	140VDC
Input Surge Voltage	<1s			156VDC
Under Voltage Lockout (UVLO) ⁽⁵⁾	DC-DC ON DC-DC OFF	15.6VDC 13.6VDC	16.0VDC 14.0VDC	16.4VDC 14.4VDC
Over Voltage Lockout (OVLO)	DC-DC ON DC-DC OFF	142VDC 154VDC	146VDC 156VDC	150VDC 160VDC
Input Current Range	Vin = 16.5V 12, 15Vout 24, 48Vout	13.5A 14A	14A 14.5A	14.5A 15A

Notes:

Note5: please refer to Under Voltage Lockout Adjustability on page PB-3

continued on next page



https://www.recom-power.com/pdf/Powerline_DC-DC/RSPxxx-168.pdf

Specifications (measured @ $T_a = 25^\circ\text{C}$, nom. V_{in} (110V), full load and after warm-up unless otherwise stated)



BASIC CHARACTERISTICS

Parameter	Condition		Min.	Typ.	Max.
Quiescent Current	$V_{in} = 110V$	12, 15, 24Vout 48Vout	30mA 50mA	60mA 80mA	90mA 150mA
Output Voltage Trimming			-20%		+10%
Minimum Load			0%		
Start-up time			200ms		460ms
Rise Time		V_{out} from 10% to 90%		50ms	100ms
ON/OFF Control ⁽⁶⁾	Positive Logic	DC-DC ON DC-DC OFF	Open or $3 < V_r < 5VDC$ Short or $0 < V_r < 0.4VDC$		
	Negative Logic	DC-DC ON DC-DC OFF	Short or $0 < V_r < 0.4VDC$ Open or $3 < V_r < 5VDC$		
Input Current of CTRL pin		DC-DC ON DC-DC OFF		0.1mA 0.1mA	0.2mA 0.2mA
Standby Current				20mA	
Internal Operating Frequency				140kHz	
Output Ripple and Noise		20MHz BW limited		350mVp-p	
Remote Sense ⁽⁶⁾					$\pm 10\%$



Notes:

Note6: see page PB-5

RPA200H-11012SRUW

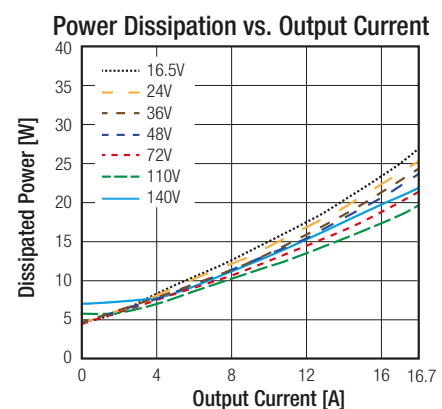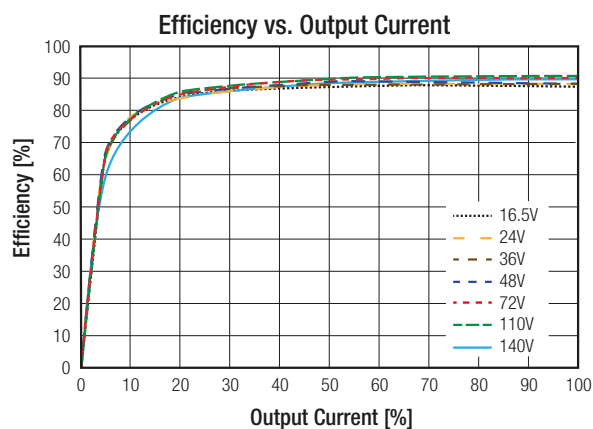



RPA200H-11015SRUW

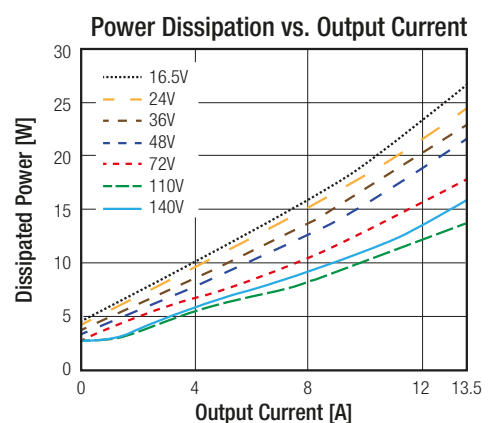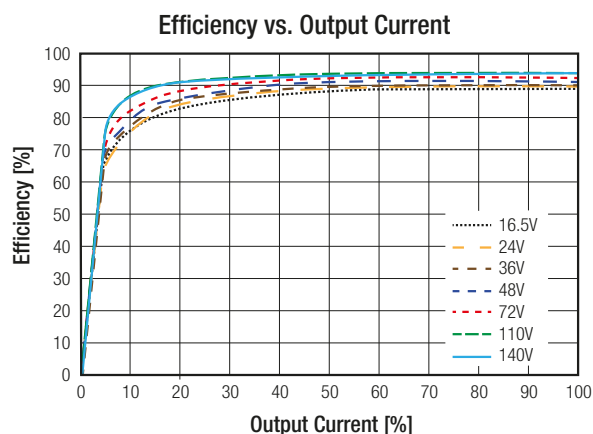



continued on next page

Specifications (measured @ $T_a = 25^\circ\text{C}$, nom. V_{in} (110V), full load and after warm-up unless otherwise stated)


RPA200H-11024SRUW

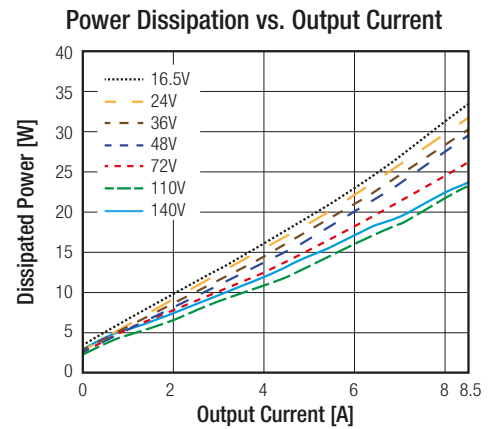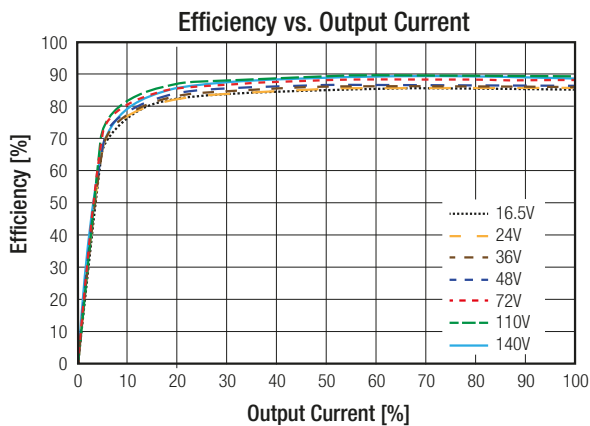

RPA200H-11048SRUW

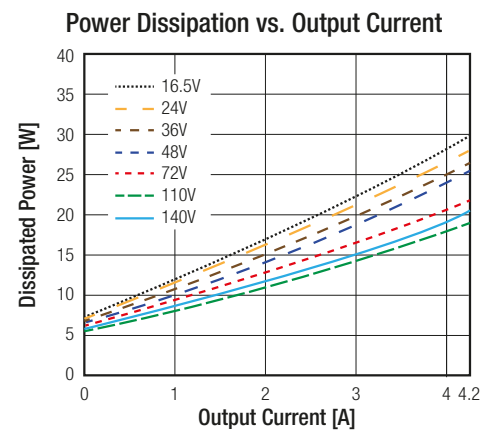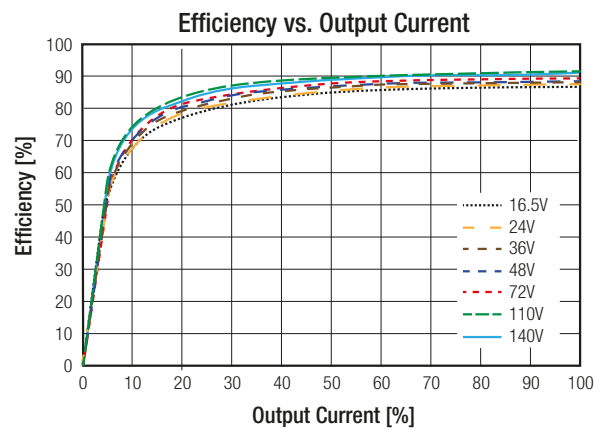


Input Voltage Range

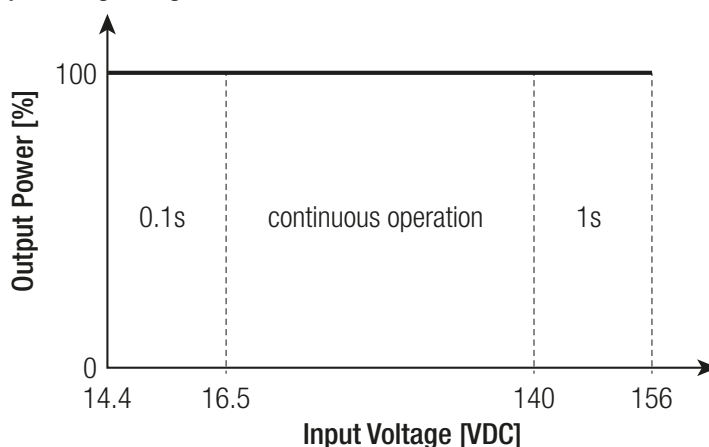

Continuous full power operation is rated between 16.5V and 140V, including full load start-up.

Once running, the converter will operate for short periods of time over an extended input voltage range down to 14.4V and up to 156V, thus covering all EN50155 under-voltage and over-voltage transient conditions.

UNDER VOLTAGE LOCKOUT ADJUSTABILITY

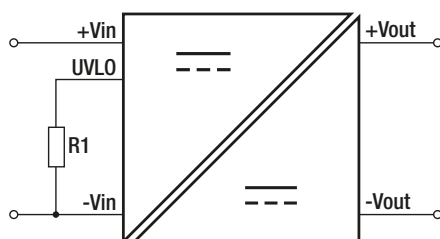

The RPA200H series has an adjustable under voltage lockout which will shut down the converter according to following settings.

Nom. Input Voltage [VDC]	24	36	48	72	110
Turn Off Threshold [VDC]	$14 \pm 0.4\text{V}$	$20.6 \pm 1\text{V}$	$27.5 \pm 1\text{V}$	$40 \pm 1\text{V}$	$64 \pm 2\text{V}$
Turn On Threshold [VDC]	$16 \pm 0.4\text{V}$	$24 \pm 1\text{V}$	$32 \pm 1\text{V}$	$46.5 \pm 1\text{V}$	$74 \pm 2\text{V}$
Resistor R1 [k Ω]	open	24.9	12.4	6.19	3.48

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)

OUTPUT VOLTAGE TRIMMING

Output Voltage Trimming

RPA200H-RUW converters offer the feature of trimming the output voltage over a certain range around the nominal value by using external trim resistors. The values for trim resistors shown in trim tables below are according to standard E96 values; therefore, the specified voltage may slightly vary; they also can be calculated with below shown equation.


Trim Calculation

Vout = nom. Output Voltage

ΔVout = Output Voltage Change in %

Rup = trim up resistor

Rdown = trim down resistor

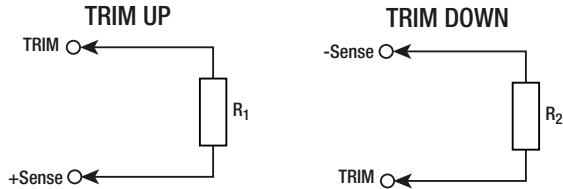

Trim up

$$R_{up} = \left[\frac{45}{\Delta V_{out}} + 40 \right] k\Omega$$

$$R_{up} = \left[\frac{95}{\Delta V_{out}} + 90 \right] k\Omega$$

$$R_{up} = \left[\frac{57.46}{\Delta V_{out}} + 52.35 \right] k\Omega$$

$$R_{up} = \left[\frac{195}{\Delta V_{out}} + 190 \right] k\Omega$$

Trim down

$$R_{down} = \left[\frac{5.11}{\Delta V_{out}} - 10.22 \right] k\Omega$$

Practical Example

Trim Up:

Vout = 12V, ΔVout = +10% (13.2V)

$$R_{up} = \left[\frac{45}{10\%} + 40 \right] k\Omega = 490k\Omega \quad (E96 = 487)$$

Trim down:

Vout = 24V, ΔVout = -8% (22V)

$$R_{down} = \left[\frac{5.11}{8\%} - 10.22 \right] k\Omega = 53.66k\Omega \quad (E96 = 53.6)$$

Trim up

RPA200H-11012SRUW

Trim up	[%]	1	2	3	4	5	6	7	8	9	10
Vout =	[VDC]	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20
R ₁ =	[kΩ]	4530	2320	1540	1150	931	787	681	604	536	487

RPA200H-11015SRUW

Trim up	[%]	1	2	3	4	5	6	7	8	9	10
Vout =	[VDC]	15.15	15.30	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50
R ₁ =	[kΩ]	5760	2940	1960	1500	1210	1010	866	768	681	619

RPA200H-11024SRUW

Trim up	[%]	1	2	3	4	5	6	7	8	9	10
Vout =	[VDC]	24.24	24.48	24.72	24.96	25.20	25.44	25.68	25.92	26.16	26.40
R ₁ =	[kΩ]	9530	4870	3240	2490	2000	1690	1430	1270	1150	1050

RPA200H-11048SRUW


Trim up	[%]	1	2	3	4	5	6	7	8	9	10
Vout =	[VDC]	48.48	48.96	49.44	49.92	50.40	50.88	51.36	51.84	52.32	52.80
R ₁ =	[kΩ]	19600	9880	6650	5110	4120	3480	3010	2610	2370	2150

Trim down RPA200H series

Trim down	[%]	1	2	3	4	5	6	7	8	9	10
R ₂ =	[kΩ]	499	243	162	118	90.9	75	63.4	53.6	46.4	41.2
Trim down	[%]	11	12	13	14	15	16	17	18	19	20
R ₂ =	[kΩ]	36.5	32.4	28.7	26.1	23.7	22.1	20	18.2	16.5	15.4

Specifications (measured @ $T_a = 25^\circ\text{C}$, nom. V_{in} (110V), full load and after warm-up unless otherwise stated)


EXTERNAL CAPACITOR

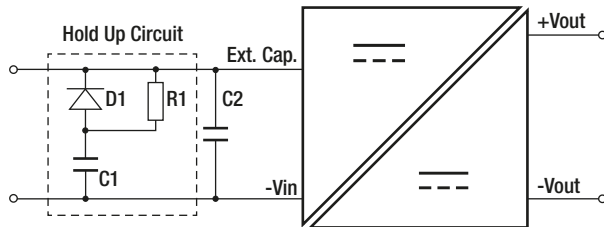

A 240 μF /200V capacitor (C2) is required for normal operation.
To meet power supply interruptions, an external circuit comprised of a capacitor (C1), a 100 Ω /10W resistor (R1) and diode (D1) is required.

C1	24Vin	36Vin	48Vin	72Vin	96Vin	110Vin
For 10ms	3600 μF	3600 μF	3600 μF	3600 μF	1000 μF	600 μF
For 30ms	10800 μF	10800 μF	10800 μF	10800 μF	3000 μF	1800 μF


ON/OFF CONTROL

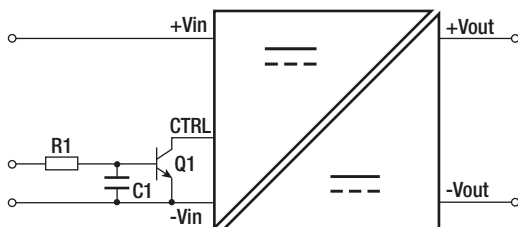

For negative logic, if the remote on/off feature is not used, short the on/off pin to -Vin.

For positive logic, if the remote on/off feature is not used, leave the on/off pin floating.

REMOTE SENSE

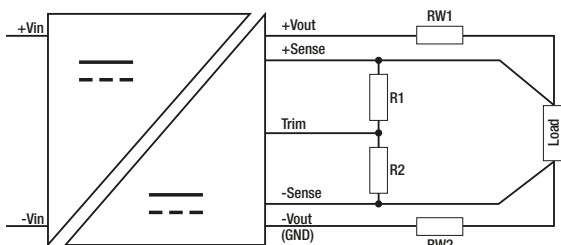

The output voltage can be adjusted by both trim and remote sense. The maximum combined adjustment range is $\pm 10\%$. Derate the maximum output power if using the trim or sense function to increase the output voltage.

R_{W1} ... wire losses +
 R_{W2} ... wire losses -
 R_1 ... trim up resistor
 R_2 ... trim down resistor





REGULATION

Parameter	Condition	Value
Output Accuracy		$\pm 1.0\%$ max.
Line Regulation	$V_{in} = 16.5$ to 140V , $I_o = \text{full load}$	$\pm 0.01\%$ typ. to $\pm 0.2\%$ max.
Load Regulation	10 - 90% load	0.05% typ. to 0.2% max.
Transient Response	25% load step change	12Vout 450mV/40 μs typ.
		15Vout 450mV/30 μs typ.
		24Vout 500mV/20 μs typ.
		48Vout 600mV/10 μs typ.

continued on next page

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)

Accuracy vs. Load

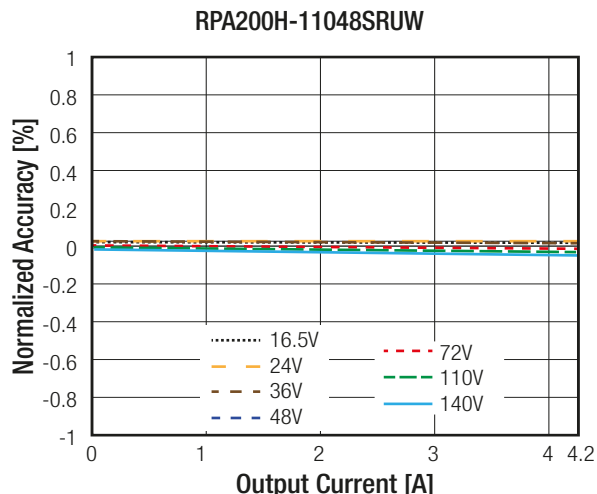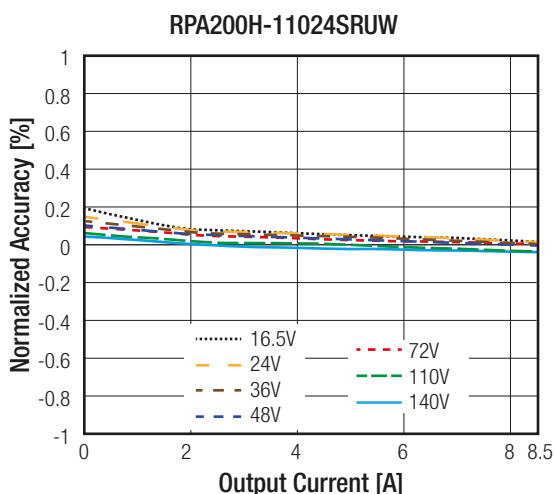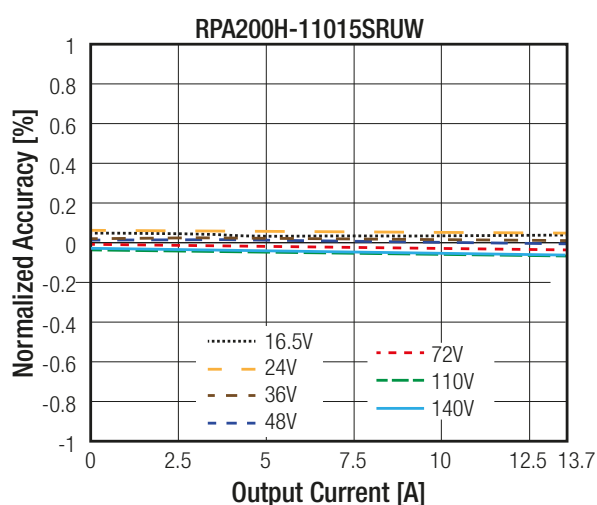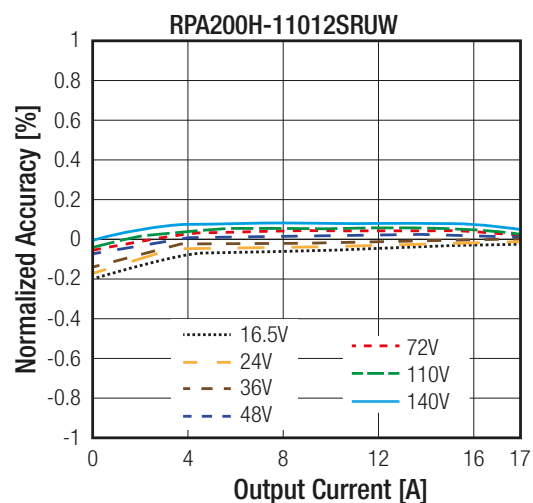

PROTECTION

Parameter	Condition		Value	
Over Voltage Protection (OVP)			110-130%, automatic recovery	
Over Current Protection (OCP)			hiccup mode, automatic recovery	
Over Temperature Protection (OTP)	@ tc point		+105°C, automatic recovery after cooling down	
Isolation Voltage ⁽⁷⁾	I/P to O/P,	rated for 1 minute	4.242kVDC	
	O/P to baseplate		4.242kVDC	
Isolation Resistance			10MΩ typ.	
Isolation Capacitance			500pF	
Leakage Current			0.42mA	
Insulation Grade			reinforced	

Notes:

Note7: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note8: Refer to local wiring regulations if input over-current protection is also required. Recommended fuse T40A slow blow type

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)

ENVIRONMENTAL

Parameter	Condition	Value
Operating Temperature Range		refer to derating graphs
Maximum Baseplate Temperature		+100°C
Temperature Coefficient		0.007%/°C
Thermal Impedance		refer to Rth tables
Operating Altitude		5000m
Operating Humidity		5%-95% RH
Pollution Degree (PD)		PD2
Fire protection on Railway Vehicles	refer to page PB-9	according to EN45545-2 standard
MTBF	according to Telcordia SR332 Issue 2 Method I, 25°C	1480 x 10 ³ hours

Notes:

Note9: Following calculations are made with RPA200H-11012SRUW/P.
Test PCB: Eurocard 160x100mm 105µm copper, double layer

Thermal Derating with Fan Cooling, Double Layer PCB and Heat-sink


Thermal Impedance	
airflow [m/s]	Rth [°C/W]
0.1	3.3
0.2	2.62
0.5	2.0
0.8	1.57
1.0	1.22
1.5	0.75

Thermal Calculation Example


$$\begin{aligned}
 I_{out} &= 50\% \\
 R_{th} &= 3.3^{\circ}\text{C/W} \\
 P_{DISS} &= 10.94\text{W} \\
 T_{ICmax} &= 100^{\circ}\text{C}
 \end{aligned}$$

$$T_{OVER} = R_{th} \times P_{DISS} = 3.3^{\circ}\text{C/W} \times 10.94\text{W} = +36^{\circ}\text{C}$$

$$T_{AMBmax} = T_{ICmax} - T_{OVER} = 100^{\circ}\text{C} - 36^{\circ}\text{C} = +64^{\circ}\text{C}$$

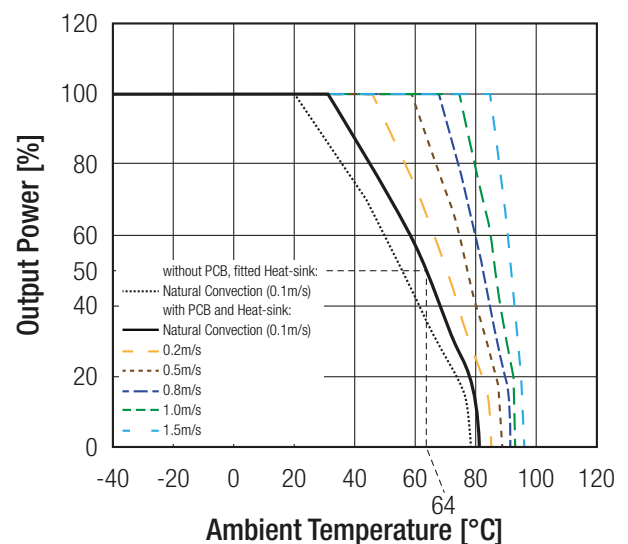

Dimension Drawing Heat-sink (mm)

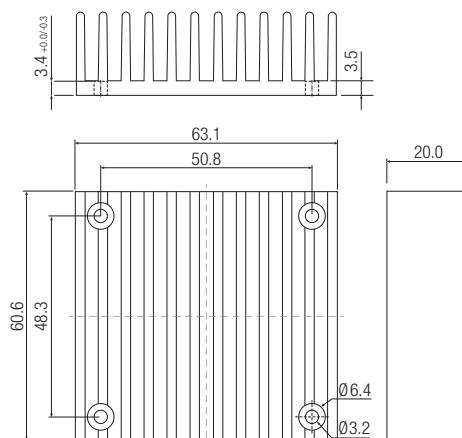

continued on next page

Specifications (measured @ $T_a = 25^\circ\text{C}$, nom. V_{in} (110V), full load and after warm-up unless otherwise stated)

Thermal Derating with Fan Cooling and Double Layer PCB

Thermal Impedance	
airflow [m/s]	R_{th} [$^\circ\text{C}/\text{W}$]
0.1	3.8
0.2	3.12
0.5	2.5
0.8	2.07
1.0	1.72
1.5	1.25

Thermal Calculation Example

$$I_{out} = 50\%$$


$$R_{th} = 2.5^\circ\text{C}/\text{W}$$

$$P_{DISS} = 10.94\text{W}$$

$$T_{ICmax} = 100^\circ\text{C}$$

$$T_{OVER} = R_{th} \times P_{DISS} = 2.5^\circ\text{C}/\text{W} \times 10.94\text{W} = +27.4^\circ\text{C}$$

$$T_{AMBmax} = T_{ICmax} - T_{OVER} = 100^\circ\text{C} - 27.4^\circ\text{C} = +73^\circ\text{C}$$

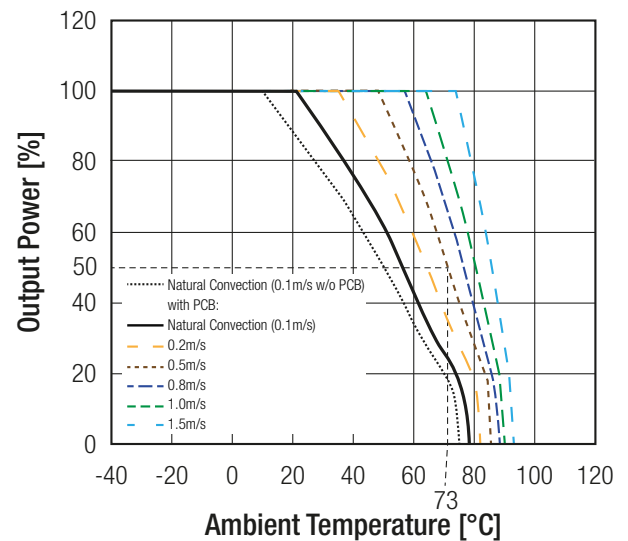

Thermal Derating with Water Cooling

Thermal Impedance	
liquid flow [l/min]	R_{th} [$^\circ\text{C}/\text{W}$]
2.3	0.31

Thermal Calculation Example

$$I_{out} = 100\%$$


$$R_{th} = 0.31^\circ\text{C}/\text{W}$$

$$P_{DISS} = 20.79\text{W}$$

$$T_{ICmax} = 100^\circ\text{C}$$

$$T_{OVER} = R_{th} \times P_{DISS} = 0.31^\circ\text{C}/\text{W} \times 20.79\text{W} = +6.5^\circ\text{C}$$

$$T_{AMBmax} = T_{ICmax} - T_{OVER} = 100^\circ\text{C} - 6.5^\circ\text{C} = +93.5^\circ\text{C}$$

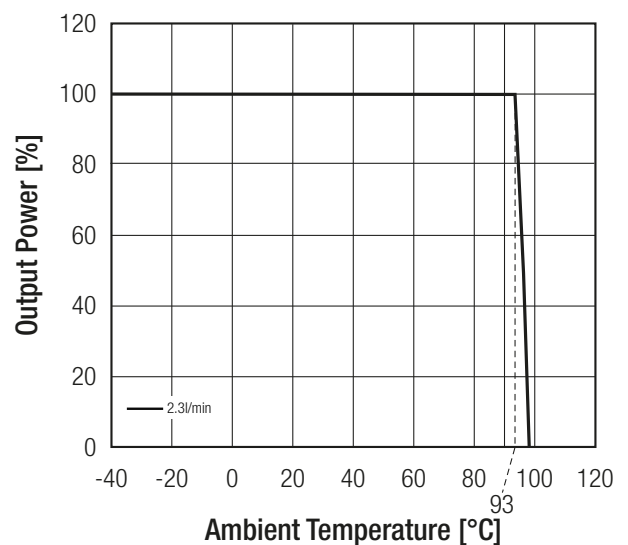

Notes:

Note10: For further details please contact our Tech Support Team techsupportAT@recom-power.com

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	E224736-A54-UL and E224736-A57-UL	UL60950-1, 2nd Edition: 2014 CAN/CSA-C22.2 No. 60950-1-07, 2nd Edition: 2014
IEC/EN Information Technology Equipment - General Requirements for Safety (CB Scheme)	E224736-A54-CB-1 and E224736-A57-CB-1	IEC60950-1: 2005, 2nd Edition + AM2: 2013
IEC/EN Information Technology Equipment - General Requirements for Safety		EN60950-1: 2006 + A2: 2013


continued on next page

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)


Fire hazard testing - Part 11-10: Test flames - 50W horizontal and vertical flame test methods	Vertical Flame Test	EN60695-11-10: 2013, HL1, HL2, HL3, V-0
Fire hazard testing - Part 2-11: Glowing/hot-wire based test methods; Glow-wire flammability test method for end-products	Glow-Wire Flammability Test 30s ta, 850°C	EN60695-2-11:2000, HL1, HL2, HL3
Plastics - Determination of burning behaviour by oxygen index - Part 2: Ambient-temperature test	OI% (min) 42.6% OI% (min) 36.8%	EN ISO 4589-2:2006, HL1, HL2, HL3 EN ISO 4589-2:1999 + A1:2006, HL1, HL2, HL3
Railway Applications - Electrical Equipment used on rolling stock		EN50155: 2007
Railway applications - Fire protection on railway vehicles Part 2: Requirements for fire behaviour of materials and components		EN45545-2:2013 + A1:2015
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS 2+		RoHS 2011/65/EU

EMC Compliance	Condition	Standard / Criterion
Railway applications - Electromagnetic compatibility - Part 3-2: Rolling stock - Apparatus	with external components	EN50121-3-2:2015
ESD Electrostatic discharge immunity test	Air ±8kV, Contact ±6kV	EN61000-4-2, Criteria B
Radiated, radio-frequency, electromagnetic field immunity test	80-1000MHz, 20V/m 800-1000MHz, 20V/m 1400-2100MHz, 10V/m 2100-2500MHz, 5V/m	EN61000-4-3, Criteria A
Fast Transient and Burst Immunity	±2kV	EN61000-4-4, Criteria A
Surge Immunity	±1kV (diff), ±2kV (com)	EN61000-4-5, Criteria B
Immunity to conducted disturbances, induced by radio-frequency fields	10V	EN61000-4-6, Criteria A
Electromagnetic compatibility of multimedia equipment - Emission requirements	with external components	EN55032, Class B

EMC Filtering according to EN50121-3-2

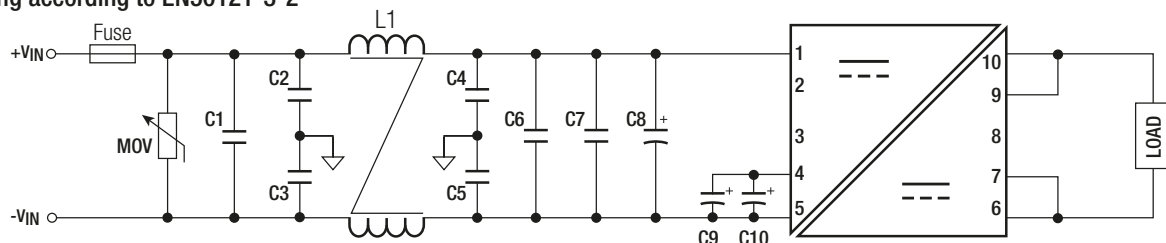


MOV	C1	C2, C3, C4, C5	L1	C6, C7	C8	C9, C10
EPCOS B72207S0131K101	100nF 275VAC	1000pF, 300VAC	1mH CMC	0.47µF 250V	100µF 200V	120µF 200V

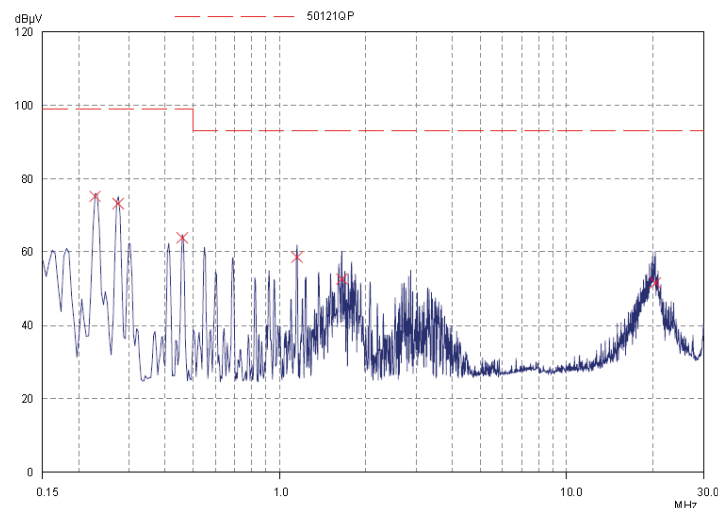


continued on next page

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)

EMC Filtering according to EN55032 Class B

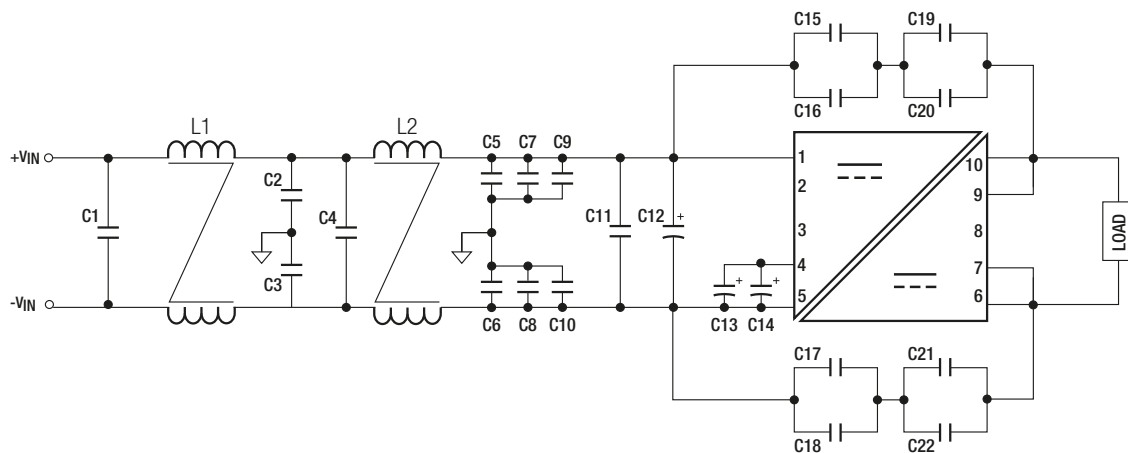

C1, C4, C11	L1, L2	C2, C3, C5, C6, C7, C8, C9, C10	C12	C13, C14	C15, C16, C17, C18, C19, C20, C21, C22,
0.47μF, 250V MLCC	1mH CMC	1.5pF, 3kV	100μF 200V	120μF 200V	6.8pF, 2kV

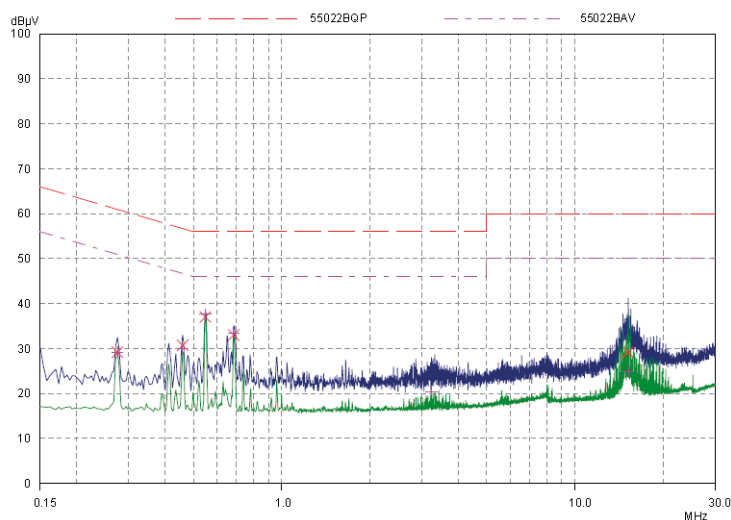


DIMENSIONS and PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	baseplate case potting	aluminum plastic (UL94V-2) low smoke silicone (UL94V-0)
Package Dimensions (LxWxH)		60.6 x 63.1 x 13.0mm
Package Weight		125.0g typ.




continued on next page

Specifications (measured @ Ta = 25°C, nom. Vin (110V), full load and after warm-up unless otherwise stated)

Dimension Drawing (mm)

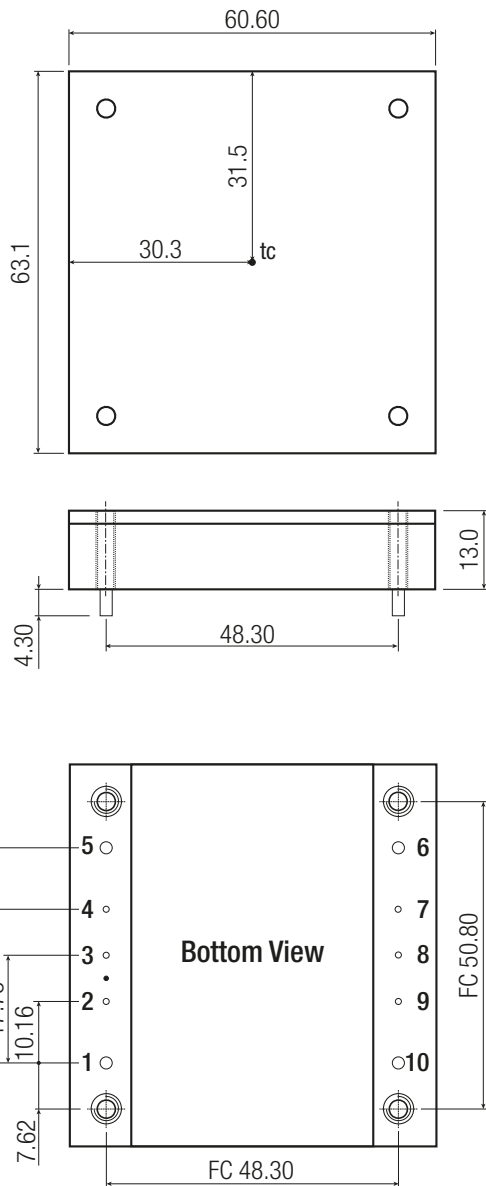

Pin1 identification

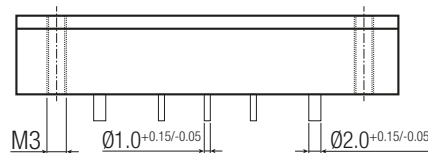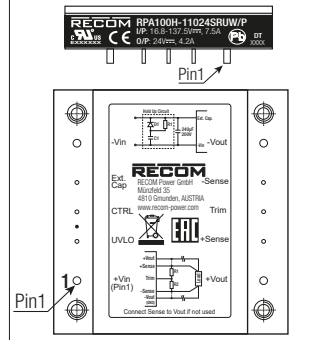


Pin Connections

Pin #	Single
1	+Vin
2	UVLO
3	CTRL
4	Ext. Cap.
5	-Vin
6	-Vout
7	-Sense
8	Trim
9	+Sense
10	+Vout

XX.X ± 0.5mm
XX.XX ± 0.25mm
FC= fixing center

Recommended Footprint Details

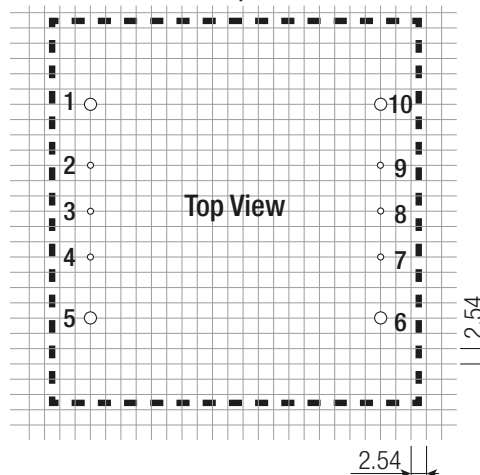

PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimensions (LxWxH)	tube	355.0 x 63.5 x 20.6mm
Packaging Quantity		5pcs
Storage Temperature Range		-55°C to +125°C
Storage Humidity		95% RH

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.