

RQA0003DNS

Silicon N-Channel MOS FET

REJ03G0584-0300

Rev.3.00

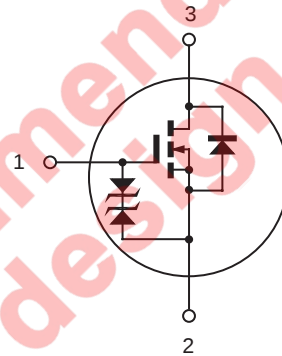

Oct 12, 2006

Features

- High Output Power, High Gain, High Efficiency
Pout = +36 dBm, Linear Gain = 19 dB, PAE = 65% (f = 520 MHz)
- Small Outline Package (WSN0303-2: 3.0 × 3.0 × 0.8mm)

Outline

RENESAS Package code: PWSN0002ZA-A
(Package name: HWSN-2 <WSN0303-2>)



1. Gate
2. Source
3. Drain

Note: Marking is "A0003".

Absolute Maximum Ratings

(Ta = 25°C)

Item	Symbol	Ratings	Unit
Drain to source voltage	V _{DSS}	16	V
Gate to source voltage	V _{GSS}	±5	V
Drain current	I _D	2.4	A
Channel dissipation	P _{ch} ^{note}	7	W
Channel temperature	T _{ch}	150	°C
Storage temperature	T _{stg}	-55 to +150	°C

Note: Value at Tc = 25°C

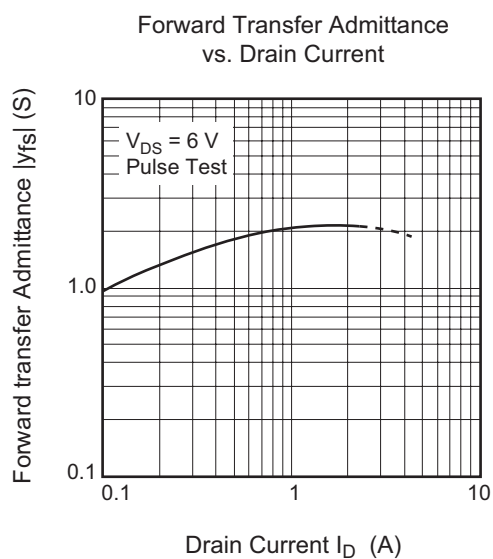
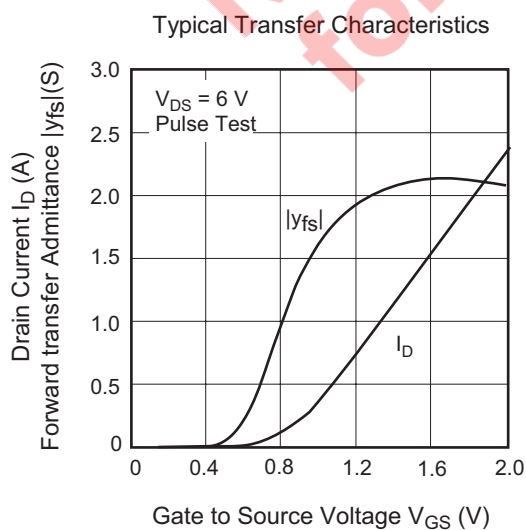
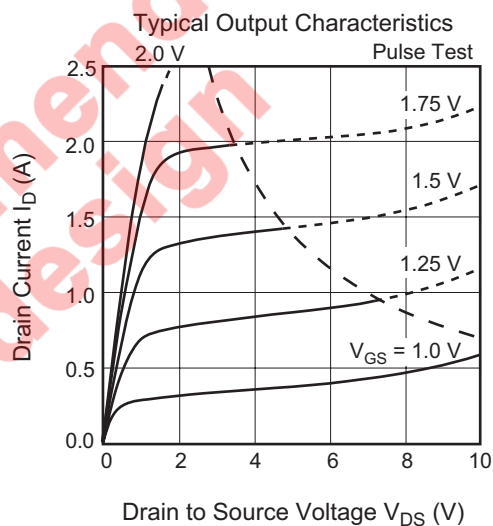
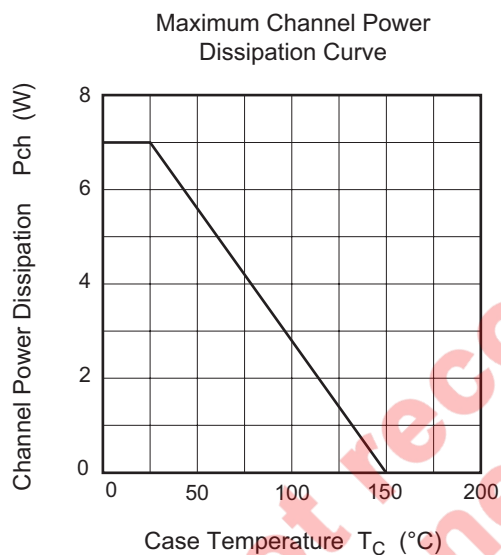
This Device is sensitive to Electro Static Discharge. An Adequate careful handling procedure is requested.

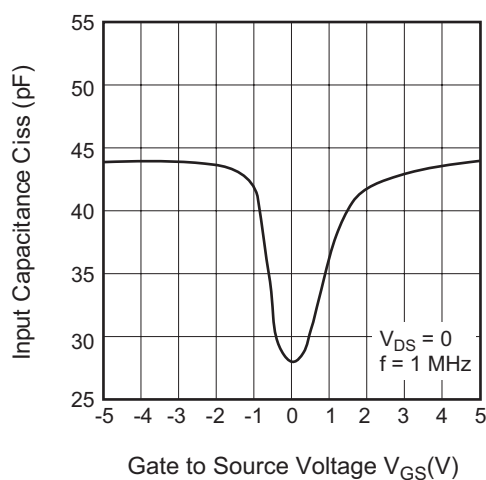
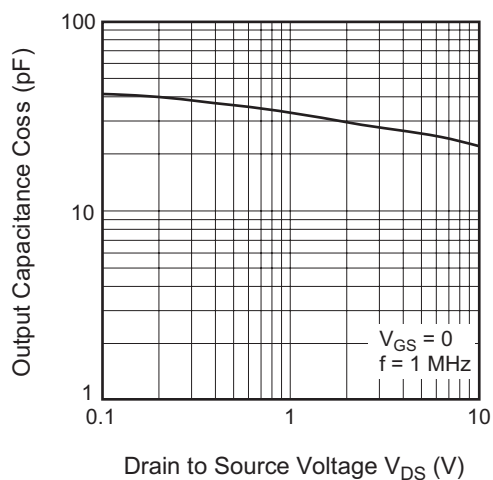
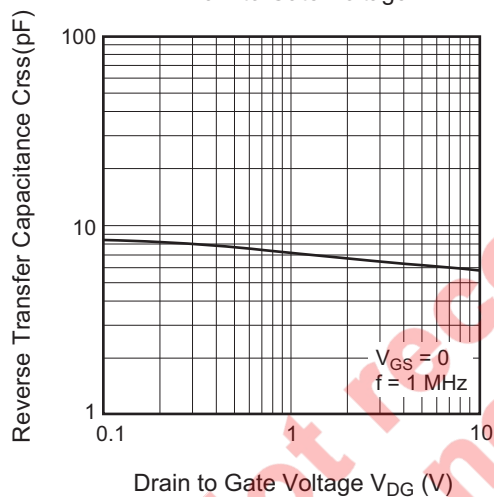
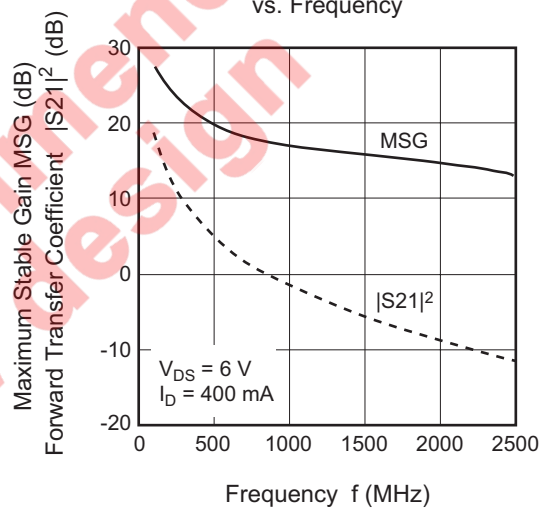
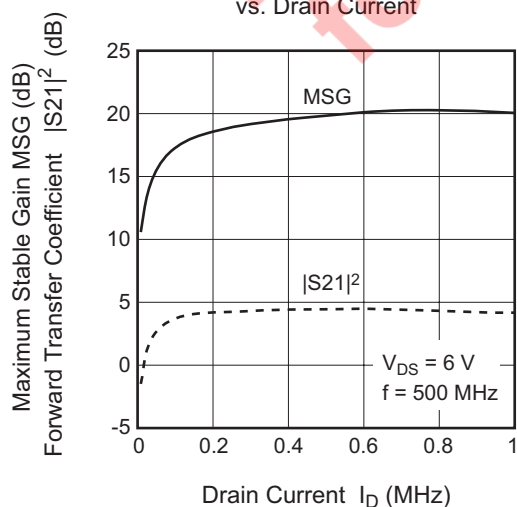
Electrical Characteristics

(Ta = 25°C)

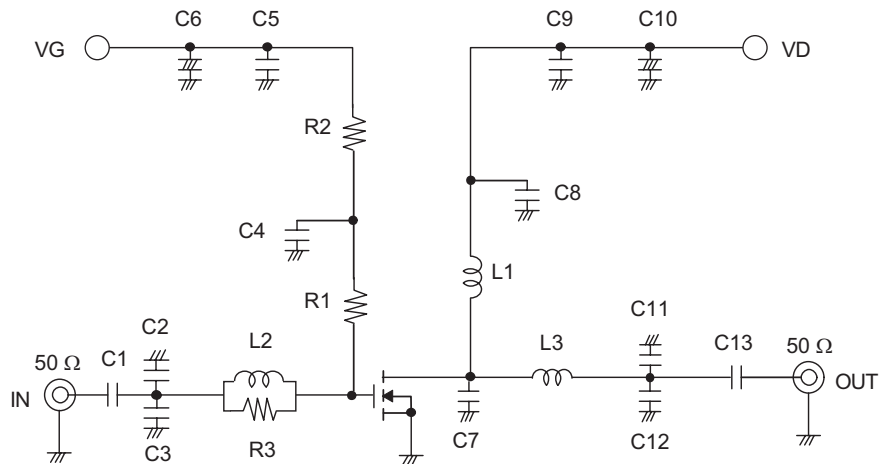
Item	Symbol	Min.	Typ	Max.	Unit	Test Conditions
Zero gate voltage drain current	I_{DSS}	—	—	10	μA	$V_{DS} = 16 V, V_{GS} = 0$
Gate to source leak current	I_{GSS}	—	—	± 2	μA	$V_{GS} = \pm 5 V, V_{DS} = 0$
Gate to source cutoff voltage	$V_{GS(off)}$	0.15	0.4	0.8	V	$V_{DS} = 6 V, I_D = 1 mA$
Forward Transfer Admittance	$ y_{fs} $	1.7	2.4	3.1	S	$V_{DS} = 6 V, I_D = 1.2 A$
Input capacitance	C_{iss}	—	44	—	pF	$V_{GS} = 5 V, V_{DS} = 0, f = 1 MHz$
Output capacitance	C_{oss}	—	25	—	pF	$V_{DS} = 6 V, V_{GS} = 0, f = 1 MHz$
Reverse transfer capacitance	C_{rss}	—	6.0	—	pF	$V_{DG} = 6 V, V_{GS} = 0, f = 1 MHz$
Output Power	P_{out}	35	36	—	dBm	$V_{DS} = 6 V, I_{DQ} = 400 mA,$ $f = 520 MHz,$
		3.16	3.98	—	W	
Power Added Efficiency	PAE	50	65	—	%	Pin = +20 dBm (100 mW)

Main Characteristics

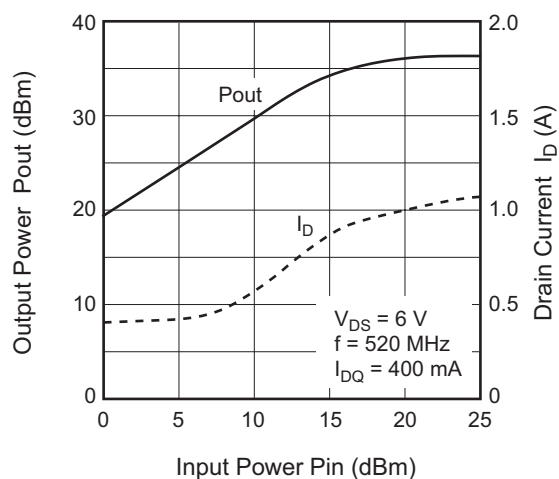
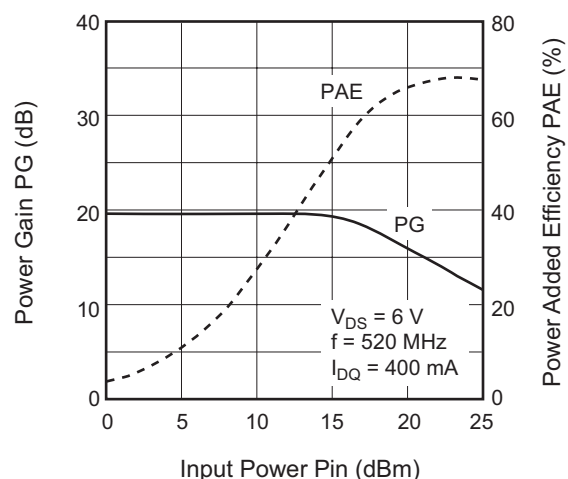
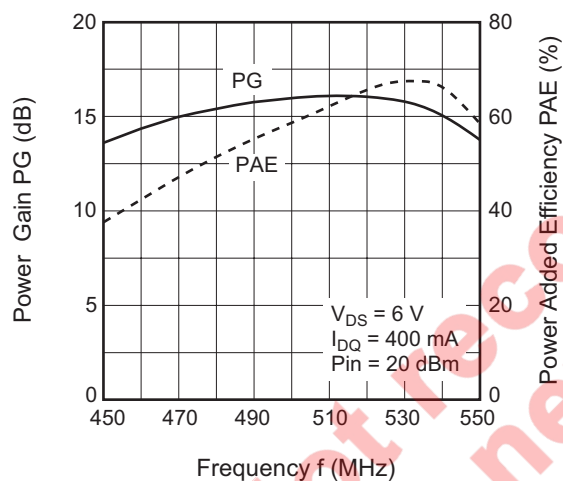


Input Capacitance vs.
Gate to Source VoltageOutput Capacitance vs.
Drain to Source VoltageReverse Transfer Capacitance vs.
Drain to Gate VoltageMaximum Stable Gain, $|S_{21}|^2$
vs. FrequencyMaximum Stable Gain, $|S_{21}|^2$
vs. Drain Current

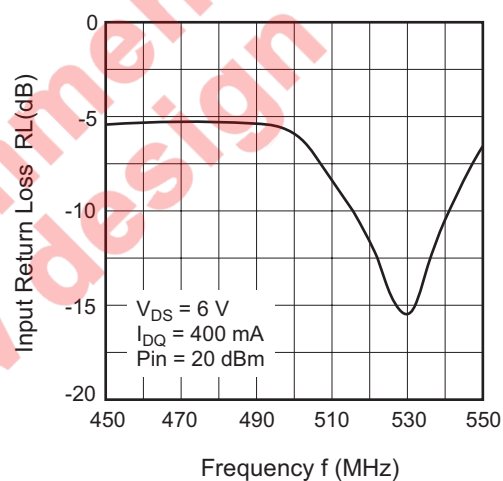
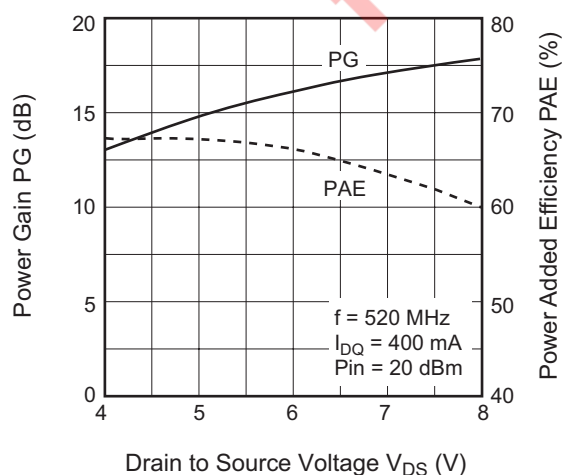
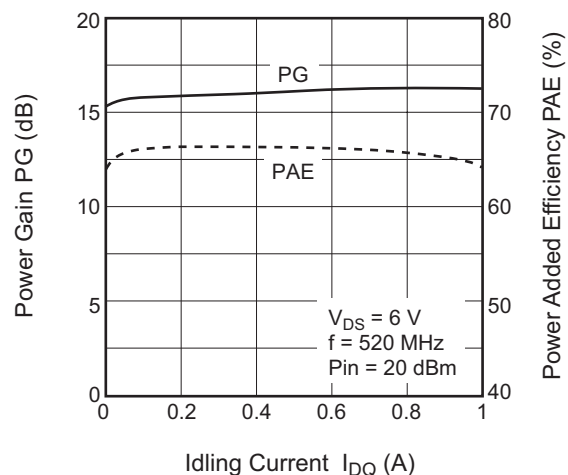
Evaluation Circuit (f = 520 MHz)

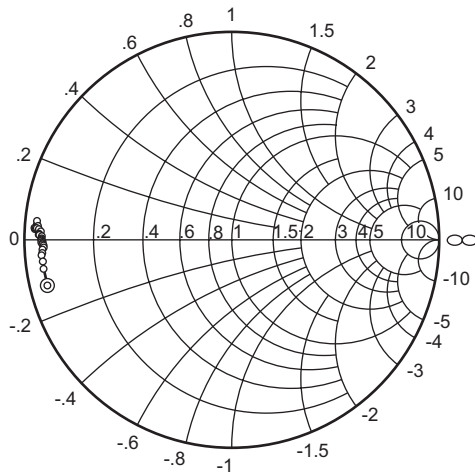


- C1, C4, C8, C13: 100 pF Chip Capacitor
 C2: 6 pF Chip Capacitor
 C3: 20 pF Chip Capacitor
 C5, C9: 1000 pF Chip Capacitor
 C6, C10: 2.2 μ F Electrolysis Capacitor
 C7: 3 pF Chip Capacitor
 C11: 5 pF Chip Capacitor
 C12: 15 pF Chip Capacitor
 L1: 8 Turns D : 0.5 mm, ϕ 2.4 mm Enamel Wire
 L2: 1.5 nH Chip Inductor
 L3: 1.2 nH Chip Inductor
 R1: 56 Ω Chip Resistor
 R2: 3 k Ω Chip Resistor
 R3: 2.2 Ω Chip Resistor

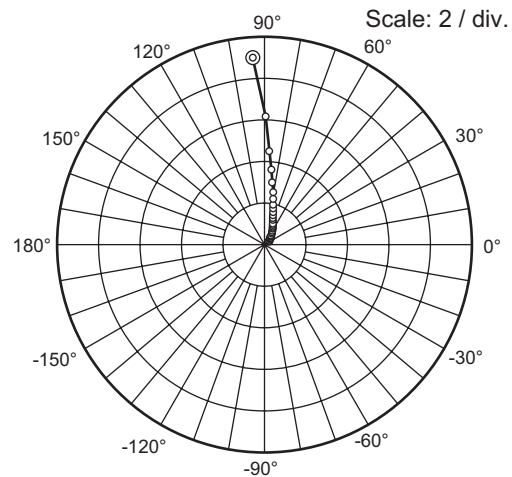
Output Power, Drain Current
vs. Input PowerPower Gain, Power Added Efficiency
vs. Input PowerPower Gain, Power Added Efficiency
vs. Frequency

Input Return Loss vs. Frequency

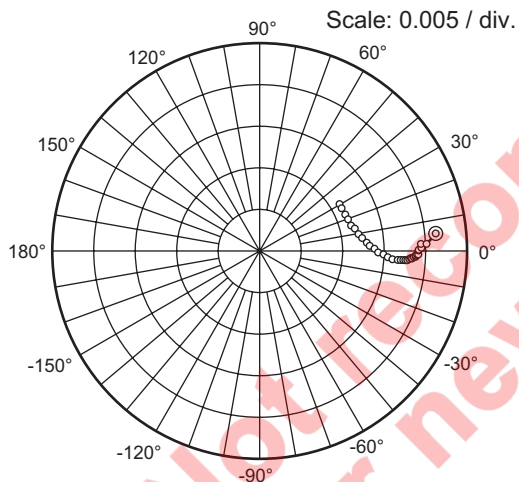
Power Gain, Power Added Efficiency
vs. Drain to Source VoltagePower Gain, Power Added Efficiency
vs. Idling Current

S_{11} Parameter vs. Frequency

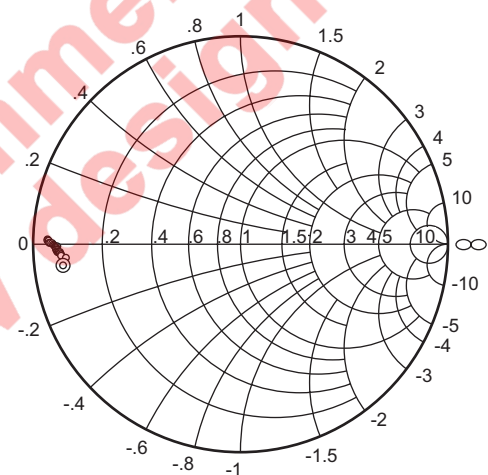
Condition: $V_{DS} = 6\text{ V}$, $I_{DQ} = 400\text{ mA}$, $Z_0 = 50\ \Omega$
 100 to 1000 MHz (50 MHz Step)
 1000 to 2500 MHz (100 MHz Step)

 S_{21} Parameter vs. Frequency

Condition: $V_{DS} = 6\text{ V}$, $I_{DQ} = 400\text{ mA}$, $Z_0 = 50\ \Omega$
 100 to 1000 MHz (50 MHz Step)
 1000 to 2500 MHz (100 MHz Step)

 S_{12} Parameter vs. Frequency

Condition: $V_{DS} = 6\text{ V}$, $I_{DQ} = 400\text{ mA}$, $Z_0 = 50\ \Omega$
 100 to 1000 MHz (50 MHz Step)
 1000 to 2500 MHz (100 MHz Step)

 S_{22} Parameter vs. Frequency

Condition: $V_{DS} = 6\text{ V}$, $I_{DQ} = 400\text{ mA}$, $Z_0 = 50\ \Omega$
 100 to 1000 MHz (50 MHz Step)
 1000 to 2500 MHz (100 MHz Step)

S Parameter

(V_{DS} = 6 V, I_{DQ} = 50 mA, Z_o = 50 Ω)

f (MHz)	S11		S21		S12		S22	
	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)
100	0.840	-155.9	7.81	94.3	0.050	4.9	0.739	-160.8
150	0.833	-164.0	5.33	87.1	0.049	-1.5	0.731	-166.1
200	0.838	-167.5	3.87	82.2	0.047	-5.2	0.753	-168.1
250	0.834	-169.5	3.07	77.9	0.046	-9.0	0.760	-169.1
300	0.837	-170.7	2.53	74.2	0.046	-11.8	0.765	-169.6
350	0.838	-171.6	2.14	70.8	0.045	-14.4	0.771	-170.0
400	0.841	-172.3	1.84	67.7	0.044	-17.0	0.781	-170.1
450	0.846	-172.8	1.61	64.7	0.043	-19.4	0.789	-170.3
500	0.851	-173.4	1.43	61.8	0.042	-21.7	0.798	-170.4
550	0.856	-173.6	1.27	59.4	0.041	-23.7	0.806	-170.5
600	0.864	-173.9	1.15	56.6	0.040	-25.5	0.816	-170.7
650	0.869	-174.2	1.04	54.2	0.039	-27.5	0.822	-171.0
700	0.874	-174.4	0.94	51.7	0.038	-29.3	0.831	-171.3
750	0.878	-174.5	0.86	49.2	0.036	-31.0	0.838	-171.5
800	0.883	-174.8	0.79	46.8	0.035	-32.8	0.843	-171.7
850	0.886	-174.9	0.72	44.6	0.034	-33.9	0.848	-172.0
900	0.891	-175.4	0.67	42.6	0.033	-35.1	0.853	-172.2
950	0.892	-175.5	0.62	40.6	0.031	-36.5	0.858	-172.5
1000	0.892	-175.9	0.57	38.6	0.030	-37.7	0.861	-172.6
1050	0.894	-176.5	0.53	36.7	0.029	-38.3	0.866	-172.8
1100	0.897	-176.9	0.50	35.1	0.028	-39.4	0.870	-173.1
1150	0.903	-177.6	0.47	33.6	0.027	-40.1	0.876	-173.2
1200	0.911	-177.7	0.44	32.2	0.025	-40.7	0.880	-173.3
1250	0.917	-177.9	0.41	31.1	0.024	-41.2	0.887	-173.6
1300	0.923	-177.8	0.39	29.9	0.023	-41.3	0.891	-173.7
1350	0.923	-177.9	0.36	28.4	0.022	-41.9	0.896	-173.9
1400	0.924	-178.1	0.34	27.0	0.021	-42.4	0.900	-174.1
1450	0.927	-178.3	0.33	25.7	0.021	-42.4	0.904	-174.3
1500	0.928	-178.7	0.31	24.4	0.020	-42.5	0.906	-174.5
1550	0.927	-178.6	0.29	23.3	0.019	-42.7	0.909	-174.9
1600	0.926	-178.7	0.28	22.5	0.018	-42.5	0.913	-175.1
1650	0.926	-179.1	0.26	21.1	0.017	-42.3	0.915	-175.5
1700	0.920	-179.6	0.25	20.0	0.016	-42.0	0.918	-175.7
1750	0.920	180.0	0.24	19.0	0.015	-41.6	0.920	-176.1
1800	0.926	179.3	0.22	17.9	0.015	-40.7	0.925	-176.4
1850	0.934	178.9	0.21	17.0	0.014	-40.3	0.926	-176.5
1900	0.943	178.8	0.21	16.4	0.013	-39.5	0.927	-176.8
1950	0.950	178.8	0.20	15.7	0.013	-38.9	0.931	-177.2
2000	0.956	179.0	0.19	15.2	0.012	-37.5	0.936	-177.3
2050	0.956	179.1	0.18	14.5	0.011	-36.1	0.936	-177.4
2100	0.952	179.1	0.17	14.1	0.011	-34.8	0.939	-177.8
2150	0.949	179.1	0.17	13.5	0.010	-32.5	0.943	-177.9
2200	0.945	178.8	0.16	12.9	0.010	-30.6	0.945	-178.0
2250	0.940	178.5	0.15	12.2	0.009	-29.0	0.945	-178.2
2300	0.940	178.2	0.15	11.7	0.008	-26.1	0.946	-178.4
2350	0.941	177.8	0.14	11.1	0.008	-23.0	0.951	-178.5
2400	0.942	177.5	0.14	10.4	0.008	-19.0	0.951	-178.7
2450	0.941	177.3	0.13	10.2	0.007	-16.1	0.951	-178.9
2500	0.945	176.7	0.13	9.4	0.007	-12.7	0.953	-179.2

S Parameter

(V_{DS} = 6 V, I_{DQ} = 100 mA, Z_o = 50 Ω)

f (MHz)	S11		S21		S12		S22	
	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)
100	0.875	-161.9	8.51	93.5	0.035	4.5	0.797	-167.5
150	0.873	-168.3	5.76	88.1	0.034	0.0	0.786	-171.3
200	0.875	-171.1	4.20	84.1	0.033	-2.2	0.805	-172.6
250	0.872	-172.8	3.34	81.0	0.033	-5.0	0.810	-173.3
300	0.869	-173.7	2.77	78.4	0.033	-6.6	0.812	-173.8
350	0.871	-174.6	2.36	75.7	0.033	-8.2	0.814	-174.0
400	0.870	-175.1	2.05	73.3	0.032	-10.2	0.823	-174.2
450	0.871	-175.8	1.81	71.1	0.032	-11.7	0.827	-174.2
500	0.873	-176.2	1.62	68.7	0.031	-13.4	0.830	-174.3
550	0.876	-176.4	1.45	66.7	0.031	-14.7	0.837	-174.5
600	0.881	-176.5	1.32	64.5	0.030	-16.0	0.841	-174.5
650	0.883	-176.8	1.20	62.3	0.030	-17.4	0.845	-174.8
700	0.885	-176.9	1.10	60.1	0.029	-18.7	0.849	-175.0
750	0.884	-177.1	1.01	58.1	0.028	-19.9	0.853	-175.1
800	0.889	-177.2	0.94	55.9	0.027	-21.1	0.854	-175.3
850	0.893	-177.3	0.87	53.9	0.027	-22.1	0.856	-175.5
900	0.895	-177.6	0.81	51.9	0.026	-22.8	0.857	-175.5
950	0.897	-177.7	0.75	50.1	0.025	-23.8	0.860	-175.6
1000	0.894	-177.9	0.70	48.5	0.025	-24.6	0.862	-175.6
1050	0.896	-178.1	0.66	46.6	0.024	-25.3	0.863	-175.7
1100	0.898	-178.8	0.62	44.9	0.023	-25.8	0.865	-175.7
1150	0.903	-179.1	0.59	43.7	0.022	-26.3	0.871	-175.8
1200	0.910	-179.2	0.55	42.2	0.021	-26.5	0.873	-175.8
1250	0.918	-179.2	0.52	41.2	0.021	-26.8	0.879	-175.9
1300	0.919	-179.3	0.50	40.0	0.020	-26.8	0.881	-175.9
1350	0.918	-179.4	0.47	38.6	0.019	-27.0	0.885	-175.9
1400	0.920	-179.5	0.44	37.1	0.019	-27.0	0.888	-176.0
1450	0.920	-179.6	0.42	35.5	0.018	-26.9	0.892	-176.1
1500	0.924	-179.7	0.40	34.5	0.017	-26.8	0.895	-176.3
1550	0.924	-179.7	0.38	33.2	0.017	-26.4	0.897	-176.5
1600	0.920	-179.9	0.36	32.3	0.016	-26.2	0.900	-176.6
1650	0.921	-179.8	0.35	31.1	0.016	-25.8	0.902	-176.8
1700	0.915	-179.5	0.33	29.9	0.015	-25.2	0.905	-177.1
1750	0.918	-178.9	0.32	28.9	0.014	-24.7	0.907	-177.3
1800	0.920	-178.4	0.30	27.6	0.014	-23.3	0.911	-177.5
1850	0.932	-178.2	0.29	26.6	0.013	-22.5	0.913	-177.7
1900	0.940	-178.1	0.28	26.1	0.013	-21.7	0.913	-177.9
1950	0.944	-178.0	0.27	25.1	0.012	-20.3	0.918	-178.2
2000	0.949	-178.1	0.26	24.3	0.012	-18.8	0.923	-178.2
2050	0.950	-178.4	0.25	23.8	0.011	-17.0	0.924	-178.3
2100	0.946	-178.3	0.24	22.9	0.011	-15.4	0.926	-178.6
2150	0.941	-178.2	0.23	22.3	0.010	-13.3	0.931	-178.8
2200	0.940	-178.1	0.22	21.6	0.010	-11.1	0.932	-178.8
2250	0.942	-177.9	0.21	21.0	0.010	-8.9	0.934	-178.9
2300	0.938	-177.5	0.20	20.2	0.009	-6.1	0.935	-179.1
2350	0.940	-177.3	0.20	19.6	0.009	-3.7	0.940	-179.2
2400	0.940	-176.9	0.19	19.0	0.009	0.1	0.939	-179.3
2450	0.943	-176.8	0.18	18.3	0.009	2.2	0.939	-179.5
2500	0.943	-176.2	0.18	17.4	0.008	5.6	0.942	-179.8

S Parameter

(V_{DS} = 6 V, I_{DQ} = 200 mA, Z_o = 50 Ω)

f (MHz)	S11		S21		S12		S22	
	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)
100	0.903	-165.0	8.86	93.3	0.026	5.2	0.838	-171.4
150	0.902	-170.5	6.00	88.8	0.025	1.1	0.826	-174.1
200	0.903	-173.0	4.37	85.8	0.025	0.4	0.845	-175.1
250	0.899	-174.5	3.49	83.3	0.024	-1.6	0.847	-175.5
300	0.896	-175.5	2.91	81.2	0.024	-2.7	0.848	-175.9
350	0.896	-176.2	2.48	79.2	0.024	-3.4	0.851	-176.1
400	0.893	-176.5	2.16	77.4	0.024	-4.8	0.856	-176.1
450	0.895	-177.3	1.92	75.3	0.024	-5.5	0.859	-176.4
500	0.896	-177.8	1.73	73.4	0.024	-6.7	0.862	-176.5
550	0.898	-178.1	1.56	71.8	0.023	-7.1	0.865	-176.7
600	0.901	-178.1	1.42	70.0	0.023	-8.0	0.869	-176.9
650	0.902	-178.4	1.31	68.1	0.023	-8.9	0.870	-177.0
700	0.904	-178.5	1.20	66.5	0.022	-9.5	0.873	-177.3
750	0.901	-178.7	1.11	64.4	0.022	-10.7	0.874	-177.4
800	0.902	-178.7	1.03	62.6	0.022	-11.1	0.874	-177.6
850	0.907	-178.9	0.96	60.8	0.021	-11.6	0.872	-177.8
900	0.906	-179.1	0.90	59.1	0.021	-11.8	0.872	-177.9
950	0.908	-179.3	0.84	57.5	0.020	-12.5	0.874	-178.0
1000	0.904	-179.3	0.79	56.0	0.020	-12.7	0.873	-177.8
1050	0.903	-179.9	0.74	54.3	0.019	-12.9	0.872	-178.0
1100	0.906	179.8	0.71	53.0	0.019	-13.2	0.872	-178.0
1150	0.912	179.5	0.67	51.6	0.018	-13.4	0.877	-177.9
1200	0.914	179.4	0.64	50.5	0.018	-13.1	0.877	-177.8
1250	0.919	179.3	0.60	49.5	0.017	-13.0	0.881	-177.9
1300	0.923	179.4	0.57	48.1	0.017	-12.6	0.882	-177.8
1350	0.920	179.5	0.55	46.9	0.017	-12.5	0.885	-177.9
1400	0.923	179.3	0.52	45.5	0.016	-12.3	0.887	-177.8
1450	0.925	179.2	0.49	44.3	0.016	-11.8	0.890	-177.8
1500	0.926	179.1	0.48	43.1	0.015	-11.1	0.891	-178.0
1550	0.923	179.1	0.45	41.9	0.015	-10.6	0.893	-178.1
1600	0.922	179.0	0.43	40.8	0.015	-9.9	0.894	-178.2
1650	0.921	178.6	0.41	39.6	0.014	-9.3	0.898	-178.4
1700	0.917	178.5	0.40	38.5	0.014	-8.6	0.898	-178.5
1750	0.918	178.0	0.38	37.2	0.013	-7.5	0.901	-178.7
1800	0.923	177.5	0.37	36.0	0.013	-6.3	0.905	-178.9
1850	0.931	177.2	0.35	35.1	0.013	-5.0	0.906	-178.9
1900	0.935	177.2	0.34	34.2	0.012	-3.8	0.907	-179.1
1950	0.943	177.2	0.33	33.5	0.012	-2.4	0.911	-179.3
2000	0.946	177.4	0.32	32.6	0.012	-0.9	0.916	-179.4
2050	0.947	177.5	0.31	31.9	0.011	1.2	0.916	-179.4
2100	0.943	177.7	0.30	31.2	0.011	2.6	0.918	-179.6
2150	0.941	177.5	0.28	30.6	0.011	4.3	0.923	-179.8
2200	0.939	177.4	0.27	29.8	0.011	6.2	0.924	-179.7
2250	0.938	177.0	0.26	29.0	0.011	8.7	0.925	-179.9
2300	0.934	176.8	0.25	28.3	0.010	10.6	0.926	179.9
2350	0.936	176.4	0.25	27.3	0.010	13.1	0.932	179.9
2400	0.939	176.1	0.24	26.7	0.010	15.8	0.931	179.9
2450	0.937	176.0	0.23	26.0	0.010	16.9	0.931	179.7
2500	0.941	175.6	0.23	25.3	0.010	19.2	0.932	179.5

S Parameter

(V_{DS} = 6 V, I_{DQ} = 300 mA, Z_o = 50 Ω)

f (MHz)	S11		S21		S12		S22	
	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)
100	0.911	-165.6	8.96	93.4	0.023	5.1	0.854	-172.7
150	0.913	-171.0	6.07	89.1	0.022	2.1	0.840	-175.0
200	0.917	-173.6	4.43	86.3	0.021	1.3	0.860	-175.9
250	0.912	-174.8	3.55	84.1	0.021	-0.7	0.861	-176.3
300	0.906	-176.0	2.95	82.3	0.021	-1.0	0.863	-176.7
350	0.908	-176.5	2.52	80.4	0.021	-1.3	0.864	-176.8
400	0.907	-177.3	2.20	78.8	0.021	-2.1	0.868	-176.9
450	0.902	-177.8	1.96	77.0	0.021	-3.0	0.872	-177.1
500	0.907	-178.3	1.76	75.4	0.021	-3.5	0.873	-177.2
550	0.906	-178.6	1.60	73.8	0.020	-4.1	0.877	-177.4
600	0.909	-178.7	1.46	72.1	0.020	-4.5	0.879	-177.5
650	0.909	-178.9	1.34	70.4	0.020	-5.0	0.880	-177.8
700	0.909	-179.1	1.23	68.8	0.020	-5.4	0.883	-178.0
750	0.910	-179.1	1.14	67.2	0.020	-6.2	0.884	-178.1
800	0.910	-179.2	1.06	65.2	0.019	-6.4	0.882	-178.3
850	0.912	-179.3	0.99	63.8	0.019	-6.5	0.881	-178.5
900	0.912	-179.7	0.93	62.2	0.019	-6.4	0.881	-178.7
950	0.914	-179.8	0.88	60.5	0.018	-7.2	0.882	-178.7
1000	0.910	-179.9	0.82	58.9	0.018	-7.4	0.880	-178.7
1050	0.907	179.8	0.78	57.4	0.018	-6.9	0.879	-178.8
1100	0.911	179.3	0.74	56.1	0.017	-7.1	0.881	-178.7
1150	0.915	179.0	0.70	54.9	0.017	-7.0	0.881	-178.8
1200	0.920	179.0	0.67	53.8	0.016	-6.7	0.882	-178.7
1250	0.922	178.8	0.63	52.9	0.016	-6.1	0.884	-178.7
1300	0.926	178.9	0.60	51.6	0.016	-5.9	0.885	-178.6
1350	0.920	178.9	0.57	50.3	0.015	-5.2	0.888	-178.6
1400	0.925	178.8	0.55	49.2	0.015	-5.0	0.889	-178.6
1450	0.928	178.6	0.53	47.8	0.015	-4.3	0.891	-178.7
1500	0.926	178.7	0.50	46.6	0.014	-3.5	0.891	-178.7
1550	0.926	178.6	0.48	45.5	0.014	-2.6	0.894	-178.8
1600	0.925	178.5	0.46	44.4	0.014	-2.1	0.895	-178.9
1650	0.921	178.3	0.44	43.3	0.014	-1.2	0.897	-179.0
1700	0.920	178.0	0.42	42.3	0.013	-0.3	0.898	-179.2
1750	0.919	177.5	0.41	41.0	0.013	0.8	0.900	-179.3
1800	0.926	177.0	0.39	39.7	0.013	2.2	0.903	-179.6
1850	0.933	176.9	0.38	39.0	0.013	3.7	0.905	-179.5
1900	0.938	176.9	0.37	38.1	0.012	4.9	0.905	-179.7
1950	0.944	176.7	0.36	37.2	0.012	6.3	0.909	-179.9
2000	0.946	177.1	0.34	36.3	0.012	8.0	0.913	-180.0
2050	0.948	177.2	0.33	35.8	0.012	9.6	0.914	-180.0
2100	0.944	177.1	0.32	34.9	0.011	10.9	0.917	179.8
2150	0.942	177.0	0.31	34.3	0.011	13.1	0.920	179.7
2200	0.939	177.0	0.30	33.4	0.011	14.3	0.922	179.8
2250	0.937	176.7	0.29	32.6	0.011	16.1	0.922	179.6
2300	0.936	176.4	0.28	31.9	0.011	18.3	0.924	179.5
2350	0.935	176.1	0.27	30.8	0.011	20.3	0.929	179.5
2400	0.940	175.8	0.27	30.2	0.011	23.0	0.928	179.4
2450	0.940	175.7	0.26	29.6	0.011	23.9	0.927	179.3
2500	0.941	175.2	0.25	28.7	0.011	26.0	0.930	179.0

S Parameter

(V_{DS} = 6 V, I_{DQ} = 400 mA, Z_o = 50 Ω)

f (MHz)	S11		S21		S12		S22	
	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)	MAG	ANG (deg.)
100	0.916	-166.0	9.03	93.5	0.021	5.5	0.861	-173.3
150	0.917	-171.2	6.14	89.4	0.020	2.2	0.847	-175.5
200	0.918	-173.4	4.50	86.7	0.019	2.3	0.866	-176.2
250	0.917	-175.2	3.59	84.3	0.020	1.0	0.869	-176.6
300	0.914	-175.8	2.99	82.3	0.019	0.3	0.870	-176.9
350	0.910	-176.8	2.56	80.5	0.019	0.0	0.872	-177.1
400	0.909	-177.6	2.23	78.8	0.019	-1.2	0.877	-177.2
450	0.909	-178.0	1.97	77.3	0.019	-1.4	0.878	-177.3
500	0.911	-178.4	1.78	75.6	0.019	-1.8	0.881	-177.4
550	0.912	-178.7	1.61	74.2	0.019	-2.1	0.883	-177.6
600	0.912	-178.8	1.47	72.7	0.019	-2.4	0.885	-177.7
650	0.915	-179.0	1.35	71.3	0.019	-2.8	0.886	-177.9
700	0.913	-179.1	1.24	69.5	0.018	-2.8	0.889	-178.2
750	0.913	-179.3	1.15	68.1	0.018	-3.3	0.890	-178.3
800	0.916	-179.5	1.07	66.6	0.018	-3.6	0.889	-178.5
850	0.917	-179.6	1.00	65.1	0.018	-3.8	0.887	-178.7
900	0.915	-179.9	0.94	63.6	0.017	-3.7	0.887	-178.9
950	0.916	-180.0	0.89	62.1	0.017	-3.9	0.888	-178.9
1000	0.913	179.8	0.83	60.6	0.017	-3.8	0.887	-178.9
1050	0.913	179.5	0.79	59.1	0.017	-3.4	0.885	-179.1
1100	0.915	179.1	0.75	57.8	0.016	-3.6	0.885	-179.1
1150	0.918	178.8	0.72	56.5	0.016	-3.5	0.887	-179.1
1200	0.923	178.8	0.68	55.6	0.016	-2.8	0.887	-179.0
1250	0.925	178.7	0.65	54.8	0.015	-2.6	0.888	-179.2
1300	0.927	178.7	0.62	53.5	0.015	-1.6	0.889	-179.0
1350	0.929	178.7	0.59	52.2	0.015	-1.2	0.891	-179.0
1400	0.927	178.6	0.56	51.0	0.014	-0.7	0.893	-179.0
1450	0.928	178.5	0.54	49.7	0.014	-0.2	0.894	-179.0
1500	0.929	178.5	0.52	48.6	0.014	0.7	0.894	-179.1
1550	0.929	178.5	0.50	47.4	0.014	1.9	0.894	-179.2
1600	0.924	178.3	0.47	46.5	0.013	2.3	0.897	-179.3
1650	0.924	178.0	0.45	45.2	0.013	3.2	0.898	-179.4
1700	0.922	177.6	0.44	43.9	0.013	4.2	0.899	-179.5
1750	0.923	177.3	0.42	42.9	0.013	5.9	0.901	-179.7
1800	0.929	176.9	0.41	41.7	0.013	7.0	0.903	-179.8
1850	0.936	176.7	0.39	40.7	0.012	8.3	0.905	-179.9
1900	0.940	176.7	0.38	40.1	0.012	9.2	0.904	180.0
1950	0.945	176.6	0.37	39.1	0.012	11.1	0.909	179.8
2000	0.948	176.8	0.36	38.4	0.012	12.9	0.914	179.7
2050	0.948	176.9	0.35	37.8	0.012	14.5	0.913	179.7
2100	0.948	176.9	0.33	37.1	0.012	15.4	0.916	179.5
2150	0.944	176.8	0.32	36.4	0.012	17.1	0.921	179.4
2200	0.942	176.7	0.31	35.5	0.011	18.8	0.921	179.6
2250	0.942	176.5	0.30	34.8	0.011	20.7	0.921	179.3
2300	0.938	176.2	0.29	33.9	0.011	22.6	0.924	179.2
2350	0.938	175.8	0.28	33.0	0.011	24.5	0.928	179.1
2400	0.940	175.6	0.28	32.3	0.011	27.0	0.927	179.1
2450	0.944	175.2	0.27	31.7	0.011	28.0	0.927	179.0
2500	0.943	174.9	0.26	30.8	0.011	29.8	0.928	178.8

Package Name	JEITA Package Code	RENESAS Code	Previous Code	MASS[Typ.]
HWSON-2	—	PWSN002ZA-A	—	0.022g

Reference Symbol	Dimension in Millimeters		
	Min	Nom	Max
D	2.9	3.0	3.1
E	2.9	3.0	3.1
A	0.70	0.75	0.80
A ₁	0	—	0.05
A ₂	—	—	—
b	1.68	1.73	1.78
⌀	—	—	—
L _p	—	0.33	—
x	—	—	—
y	—	—	0.08
y ₁	—	—	0.10
Z _D	—	1.50	—

Part Name	Quantity	Shipping Container
RQA0003DNSTR-E	2000 pcs.	φ178 mm Reel, 12 mm Emboss Taping

Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Notes:

1. This document is provided for reference purposes only so that Renesas customers may select the appropriate Renesas products for their use. Renesas neither makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any license to any intellectual property rights or any other rights of Renesas or any third party with respect to the information in this document.
2. Renesas shall have no liability for damages or infringement of any intellectual property or other rights arising out of the use of any information in this document, including, but not limited to, product data, diagrams, charts, programs, algorithms, and application circuit examples.
3. You should not use the products or the technology described in this document for the purpose of military applications such as the development of weapons of mass destruction or for the purpose of any other military use. When exporting the products or technology described herein, you should follow the applicable export control laws and regulations, and procedures required by such laws and regulations.
4. All information included in this document such as product data, diagrams, charts, programs, algorithms, and application circuit examples, is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas products listed in this document, please confirm the latest product information with a Renesas sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas such as that disclosed through our website. (<http://www.renesas.com>)
5. Renesas has used reasonable care in compiling the information included in this document, but Renesas assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.
6. When using or otherwise relying on the information in this document, you should evaluate the information in light of the total system before deciding about the applicability of such information to the intended application. Renesas makes no representations, warranties or guarantees regarding the suitability of its products for any particular application and specifically disclaims any liability arising out of the application and use of the information in this document or Renesas products.
7. With the exception of products specified by Renesas as suitable for automobile applications, Renesas products are not designed, manufactured or tested for applications or otherwise in systems the failure or malfunction of which may cause a direct threat to human life or create a risk of human injury or which require especially high quality and reliability such as safety systems, or equipment or systems for transportation and traffic, healthcare, combustion control, aerospace and aeronautics, nuclear power, or undersea communication transmission. If you are considering the use of our products for such purposes, please contact a Renesas sales office beforehand. Renesas shall have no liability for damages arising out of the uses set forth above.
8. Notwithstanding the preceding paragraph, you should not use Renesas products for the purposes listed below:
 - (1) artificial life support devices or systems
 - (2) surgical implantations
 - (3) healthcare intervention (e.g., excision, administration of medication, etc.)
 - (4) any other purposes that pose a direct threat to human life
 Renesas shall have no liability for damages arising out of the uses set forth in the above and purchasers who elect to use Renesas products in any of the foregoing applications shall indemnify and hold harmless Renesas Technology Corp., its affiliated companies and their officers, directors, and employees against any and all damages arising out of such applications.
9. You should use the products described herein within the range specified by Renesas, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas shall have no liability for malfunctions or damages arising out of the use of Renesas products beyond such specified ranges.
10. Although Renesas endeavors to improve the quality and reliability of its products, IC products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Please be sure to implement safety measures to guard against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other applicable measures. Among others, since the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
11. In case Renesas products listed in this document are detached from the products to which the Renesas products are attached or affixed, the risk of accident such as swallowing by infants and small children is very high. You should implement safety measures so that Renesas products may not be easily detached from your products. Renesas shall have no liability for damages arising out of such detachment.
12. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written approval from Renesas.
13. Please contact a Renesas sales office if you have any questions regarding the information contained in this document, Renesas semiconductor products, or if you have any other inquiries.



RENESAS SALES OFFICES

<http://www.renesas.com>

Refer to "<http://www.renesas.com/en/network>" for the latest and detailed information.

Renesas Technology America, Inc.

450 Holger Way, San Jose, CA 95134-1368, U.S.A
Tel: <1> (408) 382-7500, Fax: <1> (408) 382-7501

Renesas Technology Europe Limited

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: <44> (1628) 585-100, Fax: <44> (1628) 585-900

Renesas Technology (Shanghai) Co., Ltd.

Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd, Pudong District, Shanghai, China 200120
Tel: <86> (21) 5877-1818, Fax: <86> (21) 6887-7898

Renesas Technology Hong Kong Ltd.

7th Floor, North Tower, World Finance Centre, Harbour City, 1 Canton Road, Tsimshatsui, Kowloon, Hong Kong
Tel: <852> 2265-6688, Fax: <852> 2730-6071

Renesas Technology Taiwan Co., Ltd.

10th Floor, No.99, Fushing North Road, Taipei, Taiwan
Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

Renesas Technology Singapore Pte. Ltd.

1 Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632
Tel: <65> 6213-0200, Fax: <65> 6278-8001

Renesas Technology Korea Co., Ltd.

Kukje Center Bldg. 18th Fl., 191, 2-ka, Hangang-ro, Yongsan-ku, Seoul 140-702, Korea
Tel: <82> (2) 796-3115, Fax: <82> (2) 796-2145

Renesas Technology Malaysia Sdn. Bhd

Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No.18, Jalan Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: <603> 7955-9390, Fax: <603> 7955-9510