

RS1001 THRU RS1007

Features

- Low Forward Voltage Drop
- Ideal For Printer Circuit Boards
- High Current Capability and High Reliability
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Lead Free Finish/RoHS Compliant (NOTE 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- UL Recognized File # E165989

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C


Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
RS1001	RS1001	50V	35V	50V
RS1002	RS1002	100V	70V	100V
RS1003	RS1003	200V	140V	200V
RS1004	RS1004	400V	280V	400V
RS1005	RS1005	600V	420V	600V
RS1006	RS1006	800V	560V	800V
RS1007	RS1007	1000V	700V	1000v

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	10 A	$T_c = 100^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	250A	8.3ms, half sine
Maximum Forward Voltage Drop Per Element	V_F	1.0V	$I_{FM} = 5.0\text{A};$ $T_J = 25^\circ\text{C}^*$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	10 μA 300mA	$T_J = 25^\circ\text{C}$ $T_J = 100^\circ\text{C}$

*Pulse test: Pulse width 300 μsec , Duty cycle 1%

10 Amp Single Phase Bridge Rectifier 50 to 1000 Volts

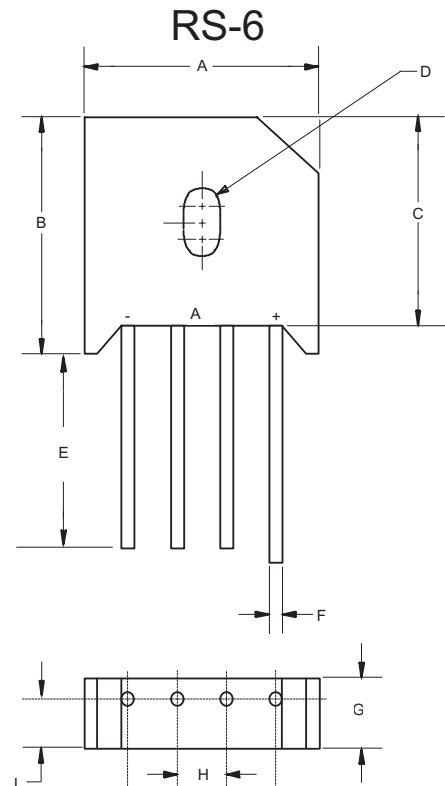

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.895	.935	22.70	23.70	
B	---	.760	---	19.30	
C	.660	.728	16.80	18.50	
D	.15 \varnothing x	.23L	3.8 \varnothing x	5.57L	HOLE
E	.787	---	20.00	---	
F	.048	.052	1.20	1.30	TYP
G	.260	.280	6.60	7.10	
H	.180	.220	4.60	5.60	
I	.181	.205	4.60	5.20	

FIG. 1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

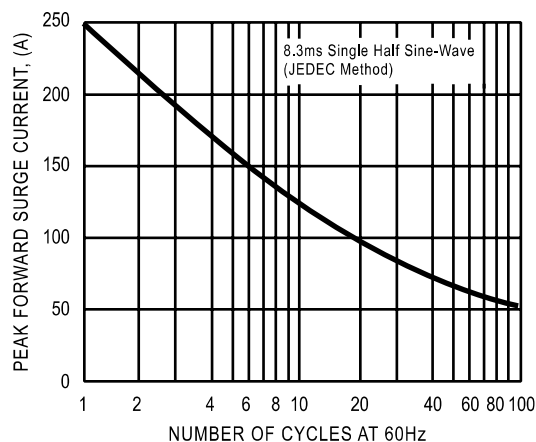


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

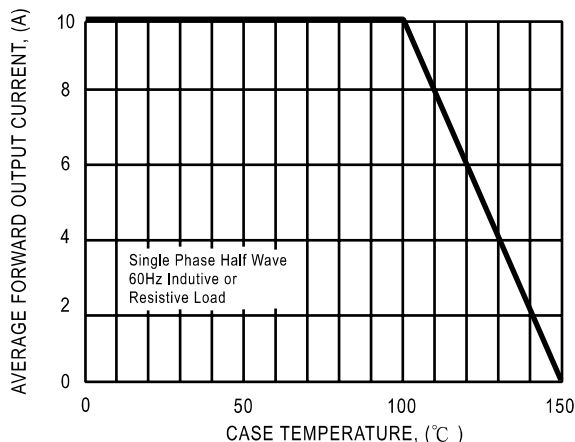


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


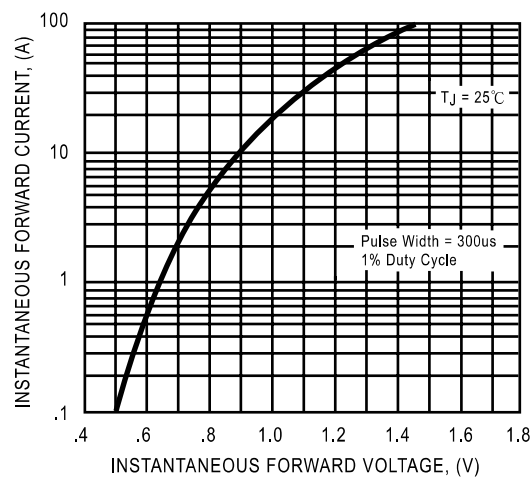


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS



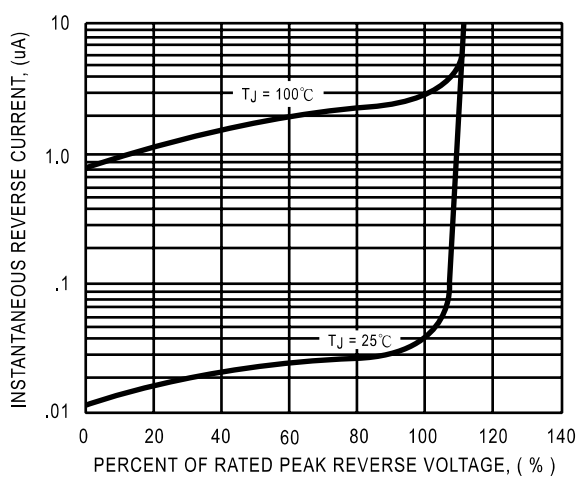

RS1001 thru RS1007

Ordering Information :

Device	Packing
(Part Number)-BP	Bulk: 400pcs/Box

Note : Adding "-HF" suffix for halogen free, eg. Part Number-BP-HF

IMPORTANT NOTICE

Siyang Grande Electronics Co., Ltd. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . Siyang Grande Electronics Co., Ltd. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold Siyang Grande Electronics Co., Ltd. and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

GRANDE's products are not authorized for use as critical components in life support devices or systems without the express written approval of Siyang Grande Electronics Co., Ltd.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Siyang Grande Electronics Co., Ltd. (GRANDE) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. GRANDE strongly encourages customers to purchase GRANDE parts either directly from GRANDE or from Authorized GRANDE Distributors who are listed by country on our web page cited below. Products customers buy either from GRANDE directly or from Authorized GRANDE Distributors are genuine parts, have full traceability, meet GRANDE's quality standards for handling and storage. GRANDE will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. GRANDE is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.grande.com.cn